



Document Number	V02_180828
-----------------	------------

Product specification

LSUM 016R8L 0058F EA



Product specification

■ Specification

1. Primary specification

Part number	Capacitance (F)	Max. ESR (mΩ)_DC	Max. Current (A) ¹ Non-repeated (Calculated value)	Leakage Current (mA)
LSUM 016R8L 0058F EA	58	22	210	< 11

2. Power & Energy

Part number	Usable Specific Power, P _d (W/kg) ²	Impedance Match Specific Power, P _{max} (W/kg) ³	Energy Density (Wh/kg)	Max. Stored Energy (Wh)
LSUM 016R8L 0058F EA	2,100	4,500	3.2	2.3

3. Standard & Reliability

Rated Voltage	16.8V		
Max. Voltage ⁴	18.0V		
Maximum Series Voltage	750V		
Capacitance Tolerance	0 % / +20%		
Operating temperature range	-40 ~ 65 °C		
Storage temperature range	-40 ~ 70 °C		
Max. continuous current ⁵	ΔT = 15 °C	12A	
	ΔT = 40 °C	20A	
Endurance Life (65 °C)	1,500 Hours		
	Capacitance change	Within 20% of initially specified value	
	ESR change	Within 100% of initially specified value	
Projected Life Time (25°C)	10 Years at rated voltage		
	Capacitance change	Within 20% of initially specified value	
	ESR change	Within 100% of initially specified value	
Projected Cycle Life (25°C) ⁶	500,000 Cycles		
	Capacitance change	Within 20% of initially specified value	
	ESR change	Within 100% of initially specified value	
Shelf Life (25 °C)	4 Years stored uncharged state		

4. Monitoring

Part number	Balancing
LSUM 016R8L 0058F EA	Active or Passive

*Remarks

1) The stated maximum peak current should not be used in normal operation and is only provided as a reference value.

2) Usable specific power

$$P_d = \frac{0.12 \times V^2}{ESR \times mass}$$

3) Impedance match specific power

$$P_{max} = \frac{V^2}{4 \times ESR \times mass}$$

4) Non repeated, not to exceed 1sec.

5) Initial state value.

6) Actual cycle value can be subject to various application conditions.

Product specification


■ Safety & Physical Protection

Part number	Isolation voltage (DC)	Short circuit current(A) ⁷	Power Terminals	Recommended Torque - Terminal	Shock & Vibration Protection ⁸
LSUM 016R8L 0058F EA	5.6kV	760	M5 Thread	4 Nm	IEC60068-2-27,-29/ IEC60068-2-6

Dimension in mm (not to scale)

■ Geometric properties

Part number	Dimension (mm)			Max. Weight (kg)
	Length	Width	Height	
LSUM 016R8L 0058F EA	245.0±1.0	47.0±1.0	76.6±1.0	0.7

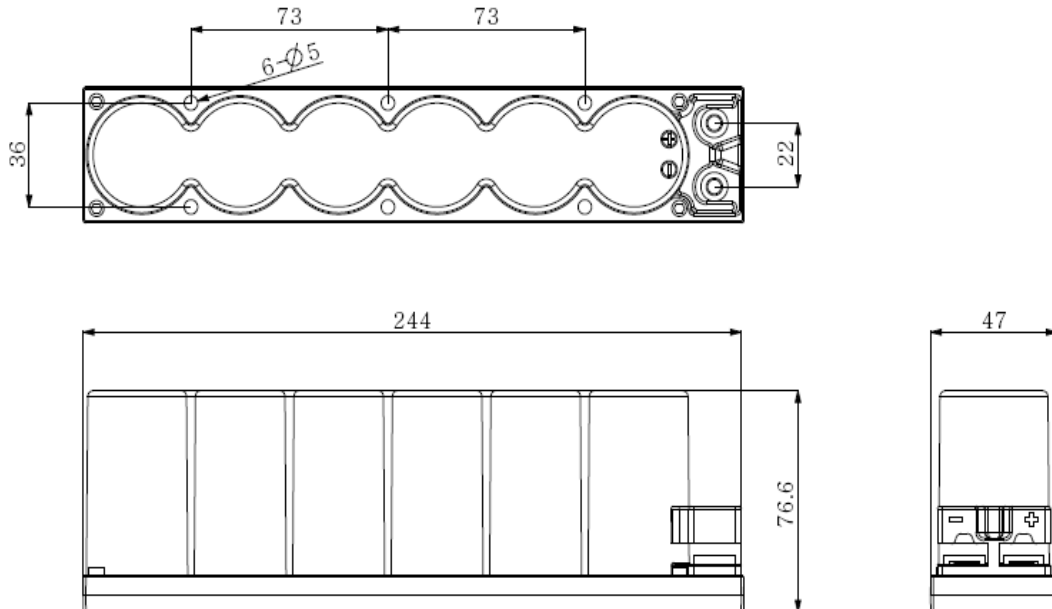

*Remarks

7) Calculated value. Do not use as an operating current.

8) This value is for a test with limited conditions and may be different under actual conditions.