


# LS Ultracapacitor

New-generation Energy Storage Devices with  
Great Power and Great Reliability



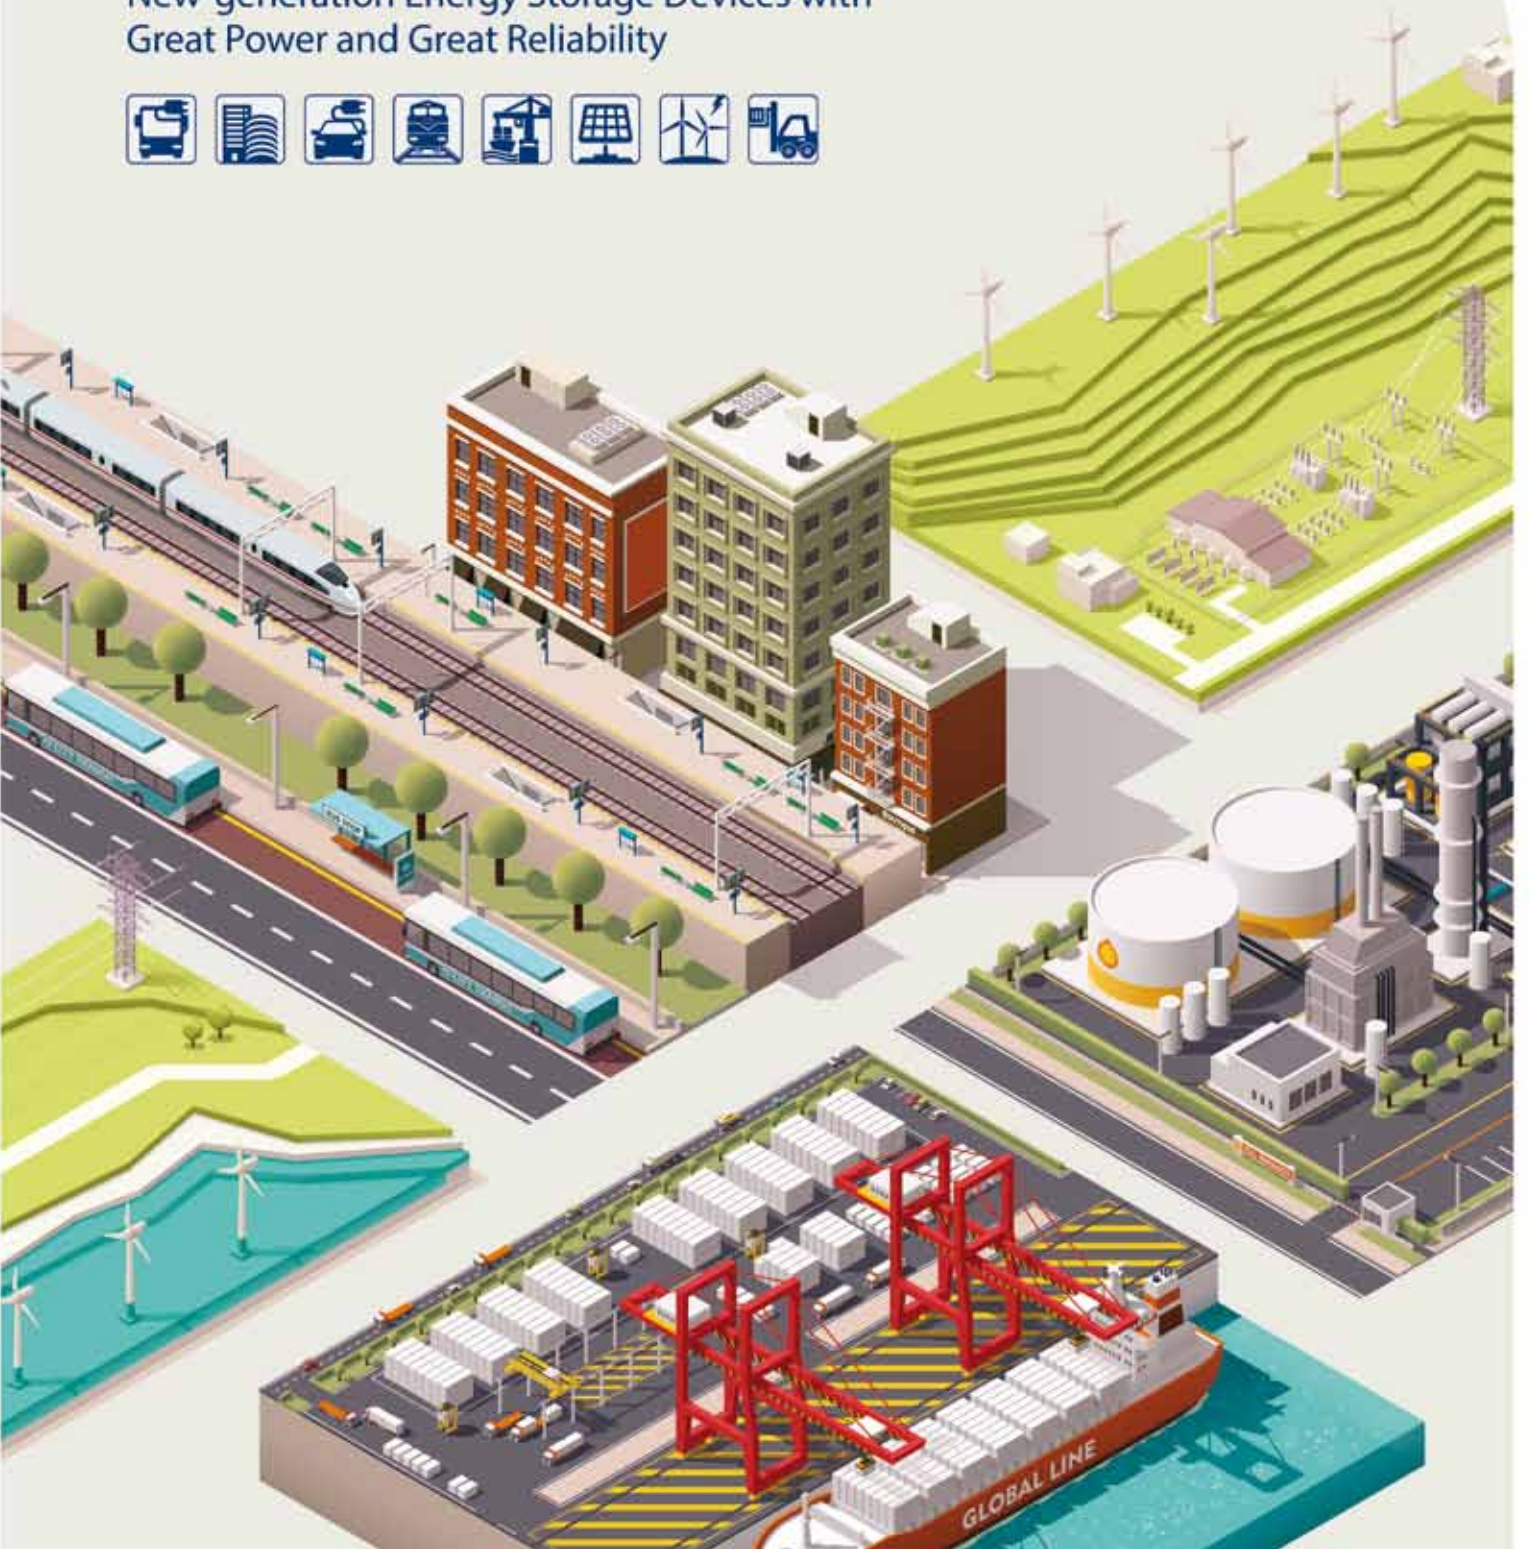


## ***Leading Solution***

*LS Mtron, LS Cable & System, LSIS,  
LS-Nikko Copper, Gaon Cable, E1 and Yesco*

## Vision Statement

In order to become a leader in the competitive global market LG has been divided into three business groups based upon their core competencies, Industrial Electric-Electronic Energy & Materials(LS), Electronic & Chemical(LG), and Energy & Retail(GS).

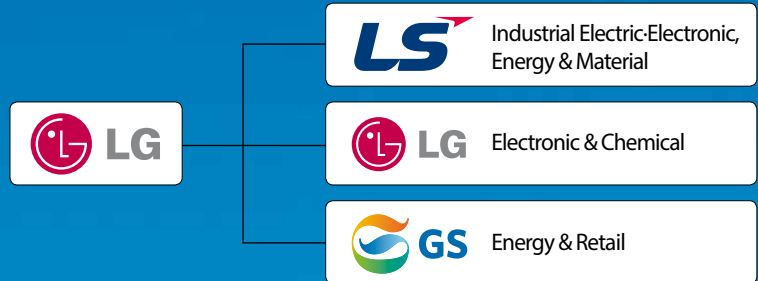

## INNOVATIVE TECHNOLOGY PARTNER - LS Mtron

LS Mtron's mission is to grow into a company that provides market leading solutions while developing a workplace where its employee can achieve their dreams. All employees of LS Mtron stand behind the vision of becoming an Innovative Technology Partner and work tirelessly to make LS Mtron a world-class company

LS Mtron will secure world-class core technologies to find and implement the most efficient solutions based on a market knowledge that can meet the challenges of our today's markets We will work hand-in-hand with our customers in order to grow into a global leader.

## Business of LS Mtron

Component

**Ultracapacitor**

**Electronic Parts**

Connectors / Antenna's

Machinery

**Tractor**

**Injection Molding Machine**

**Track Shoes**



# LS Ultracapacitor

New-generation Energy Storage Devices with Great Power and Great Reliability



## Overview

LS Ultracapacitor energy storage devices are positioned between conventional electrolytic capacitors and rechargeable batteries. LS Ultra capacitors feature high power, high energy, reliability and long life which enables use in a variety of applications such as back-up power, auxiliary power, instantaneous power compensation and peak power compensation.


- Rated voltage : up to 3.0V
- High power performance (vs. Battery)
- High energy performance (vs. Conventional electrolytic capacitor)
- Environmentally friendly
- Maintenance-free
- Wide operating temperature range (-40°C ~ +65°C)



# Introduction to LS Ultracapacitor Technology


## Structure

An Ultracapacitor consists of two electrodes immersed in an electrolyte and a separator which prevents the charge from moving between two electrodes of opposite polarity.

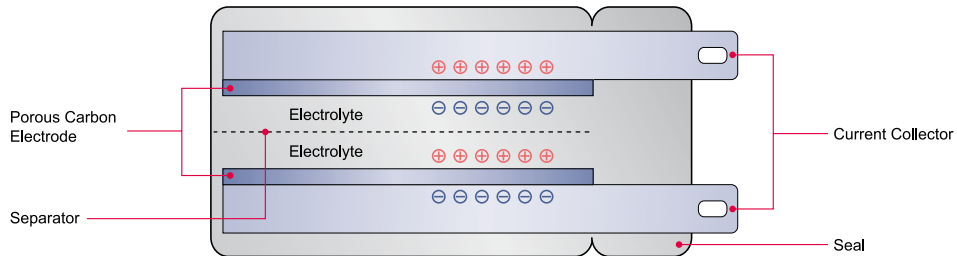


LS Mtron provides optimal package design to provide the best in performance and reliability.

### LS Ultracapacitor Cylindrical Type

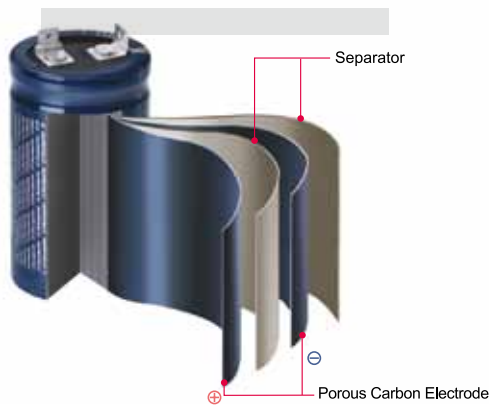


### LS Ultracapacitor Prismatic Type

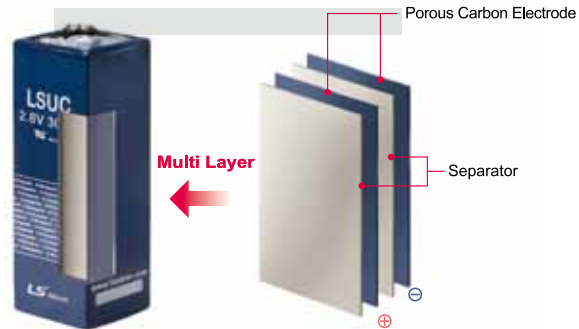

## Operating Principle

Ultracapacitors store energy based on electrostatic charges on opposite electrode surface of the electric double layer which is formed between the electrodes and the electrolyte. Randomly distributed ions in the electrolyte move toward the electrode surface of opposite polarity under electric field when charged. It is a purely physical phenomenon rather than a chemical reaction and is a highly reversible process. This results in a high power, high cycle life, long shelf life and maintenance-free product.


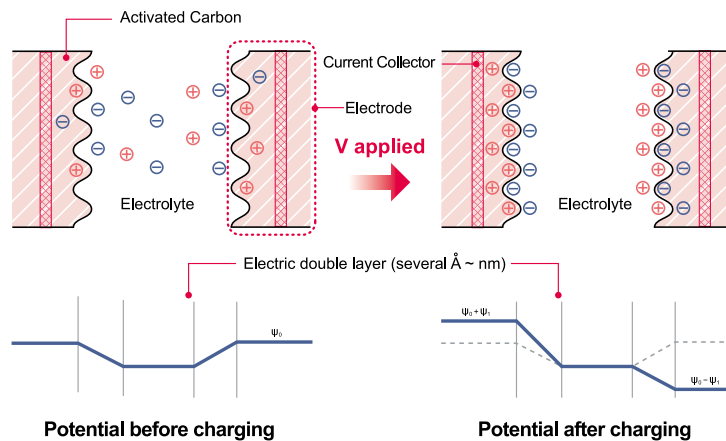


# Differences Between LS Ultracapacitor & Other Energy Storage Devices

## High Energy & High Power



Ultracapacitors are unique energy storage devices offering high power and high energy simultaneously, compared with conventional electrolytic capacitors and batteries. The high energy stored by Ultracapacitors in comparison to conventional electrolytic capacitors is derived from activated carbon electrode material having the extremely high surface area and the short distance of charge separation created by the opposite charges in the interface between electrode and electrolyte.

High power, long shelf and cycle life performance of Ultracapacitors originate in the energy storage mechanism differing from batteries. With batteries, energy is stored and released via chemical reaction inside electrode material that causes degradation of the entire system. On the other hand, Ultracapacitors use physical charge separation phenomena between the charge on an electrode and ions in electrolyte at the interface. Since the charge and discharge processes are purely physical and highly reversible, Ultracapacitors can release energy much faster and with more power compared to batteries which rely on slow chemical reactions and can be cycled hundreds of thousands of times without significant effect on performance.

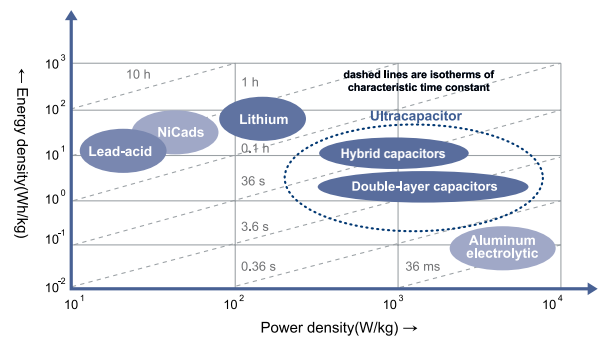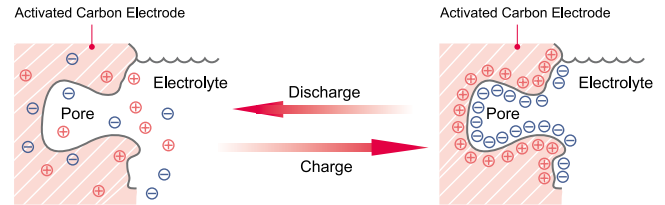

## Charge & Discharge

Ultracapacitors possess different charge and discharge characteristics compared with rechargeable batteries. Batteries have a voltage plateau region but Ultracapacitors have a linear relationship with voltage during charge and discharge. This linear relationship with voltage can change to constant voltage by simply utilizing a DC-DC converter. The amount of energy stored in an Ultracapacitor can be easily calculated by measuring voltage.

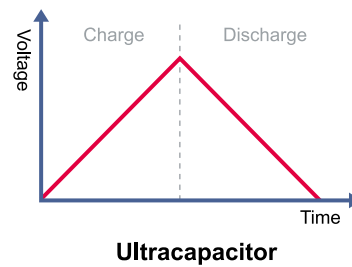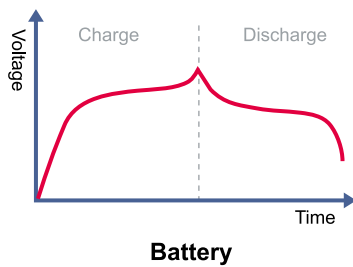

## Formulas for calculating energy in a capacitor

The different units used between Ultracapacitors (Farad) and batteries (Ampere hour) can be confusing to users when adopting Ultracapacitors in their system. The amount of energy stored in an Ultracapacitor can be easily calculated by using following equation.

$$\text{Energy (Joule)} = 1/2 \times \text{Capacitance (Farad)} \times \text{Voltage}^2 \text{ (Volt)}$$

This can be converted from Farad for Ultracapacitors to Watt hour unit which is normally used for conventional rechargeable batteries.

$$\text{Energy (Watt hour)} = \text{Energy (Joule)} / 3600 \text{ (sec)}$$

LS Mtron recommends discharging Ultracapacitors from 100% of their rated voltage to 50% of their rated voltage in order to deliver 75% of their total energy.

# LS Ultracapacitor Cells

## Specifications\_2.7V

Series	Part No.	Capacitance	Rated Voltage	Max. ESR (DC)	Max. Current Non-repeated (Calculated value)	Leakage Current	Max. Stored Energy	Weight	Operating Temperature Range	Type	Dimension
Radial Type	LSUC 002R7R 0003F EA	3F	2.7V	80mΩ	3A	<0.007mA	0.003Wh	0.0014kg	-40~65°C	Radial	Φ08 X L20mm
	LSUC 002R7R 0005F EA	5F	2.7V	60mΩ	5A	<0.010mA	0.005Wh	0.0021kg	-40~65°C	Radial	Φ10 X L20mm
	LSUC 002R7R 0010F EA	10F	2.7V	45mΩ	9A	<0.023mA	0.010Wh	0.0029kg	-40~65°C	Radial	Φ10 X L30mm
	LSUC 002R7R 0025F EA	25F	2.7V	25mΩ	20A	<0.045mA	0.025Wh	0.007kg	-40~65°C	Radial	Φ16 X L25mm
	LSUC 002R7R 0033F EA	33F	2.7V	20mΩ	26A	<0.060mA	0.033Wh	0.010kg	-40~65°C	Radial	Φ18 X L31mm
	LSUC 002R7R 0050F EA	50F	2.7V	15mΩ	38A	<0.075mA	0.051Wh	0.012kg	-40~65°C	Radial	Φ18 X L40mm

• Projected life time or cycle life time are varied based on cell type. Data sheet for each product can be downloaded on [www.ultracapacitor.co.kr](http://www.ultracapacitor.co.kr)

## Specifications\_2.8V

Series	Part No.	Capacitance	Rated Voltage	Max. ESR (DC)	Max. Current Non-repeated (Calculated value)	Leakage Current	Max. Stored Energy	Weight	Operating Temperature Range	Type	Dimension
Snap-in & Lug Type	LSUC 002R8S 0100F EA	100F	2.8V	9mΩ	74A	<0.3mA	0.10Wh	0.023kg	-40~65°C	Snap-in	Φ22 X L46mm
	LSUC 002R8S 0120F EA	120F	2.8V	9mΩ	81A	<0.4mA	0.13Wh	0.023kg	-40~65°C	Snap-in	Φ22 X L46mm
	LSUC 002R8L 0320F EM	320F	2.8V	2mΩ	273A	<1mA	0.34Wh	0.078kg	-40~65°C	Lug	Φ35 X L61mm
	LSUC 002R8L 0350F EA	350F	2.8V	3.2mΩ	231A	<1mA	0.38Wh	0.072kg	-40~65°C	Lug/Snap-in	Φ35 X L61mm
	LSUC 002R8L 0400F EA	400F	2.8V	3mΩ	255A	<1mA	0.43Wh	0.080kg	-40~65°C	Lug/Snap-in	Φ35 X L66mm
	LSUC 002R8L 0450F EA	450F	2.8V	3mΩ	268A	<1mA	0.49Wh	0.088kg	-40~65°C	Lug/Snap-in	Φ35 X L71mm
	LSUC 002R8L 0600F EA	600F	2.8V	3.2mΩ	288A	<1.3mA	0.65Wh	0.090kg	-40~65°C	Lug/Snap-in	Φ35 X L71mm
Prismatic Type	LSUC 002R8P 3000F EA	3000F	2.8V	0.36mΩ	2019A	<5mA	3.26Wh	0.650kg	-40~65°C	Prismatic	W55 X D55 X L155mm

• Projected life time or cycle life time are varied based on cell type. Data sheet for each product can be downloaded on [www.ultracapacitor.co.kr](http://www.ultracapacitor.co.kr)

## Specifications\_3.0V

Series	Part No.	Capacitance	Rated Voltage	Max. ESR (DC)	Max. Current Non-repeated (Calculated value)	Leakage Current	Max. Stored Energy	Weight	Operating Temperature Range	Type	Dimension
Snap-in & Lug Type	LSUC 003R0S 0100F EA	100F	3.0V	9mΩ	79A	<0.3mA	0.12Wh	0.023kg	-40~65°C	Snap-in	Φ22 X L46mm
	LSUC 003R0L 0380F EA	380F	3.0V	3.2mΩ	257A	<1mA	0.47Wh	0.072kg	-40~65°C	Lug/Snap-in	Φ35 X L61mm
	LSUC 003R0L 0430F EA	430F	3.0V	3mΩ	282A	<1mA	0.53Wh	0.080kg	-40~65°C	Lug/Snap-in	Φ35 X L66mm
	LSUC 003R0L 0480F EA	480F	3.0V	3mΩ	295A	<1.2mA	0.60Wh	0.088kg	-40~65°C	Lug/Snap-in	Φ35 X L71mm

• Projected life time or cycle life time are varied based on cell type. Data sheet for each product can be downloaded on [www.ultracapacitor.co.kr](http://www.ultracapacitor.co.kr)



## Specifications\_Cylindrical

Series	Part No.	Capacitance	Rated Voltage	Max. ESR (DC)	Max. Current Non-repeated (Calculated value)	Leakage Current	Max. Stored Energy	Weight	Operating Temperature Range	Type	Dimension
Cylindrical Type	LSUC 002R7C 0650F EA	650F	2.7V	0.57mΩ	640A	<1.5mA	0.65Wh	0.200kg	-40~65°C	Cylindrical	Φ60 X L51.5mm
	LSUC 002R7C 1200F EA	1200F	2.7V	0.33mΩ	1160A	<2.7mA	1.21Wh	0.280kg	-40~65°C	Cylindrical	Φ60 X L74mm
	LSUC 002R7C 1500F EA	1500F	2.7V	0.28mΩ	1426A	<3.0mA	1.51Wh	0.320kg	-40~65°C	Cylindrical	Φ60 X L85mm
	LSUC 002R7C 2000F EA	2000F	2.7V	0.27mΩ	1753A	<4.0mA	2.02Wh	0.380kg	-40~65°C	Cylindrical	Φ60 X L102mm
	LSUC 002R7C 3000F EA	3000F	2.7V	0.23mΩ	2396A	<5.0mA	3.03Wh	0.515kg	-40~65°C	Cylindrical	Φ60 X L138mm
	LSUC 02R85C 3400F EA	3400F	2.85V	0.23mΩ	2719A	<8.0mA	3.83Wh	0.515kg	-40~65°C	Cylindrical	Φ60 X L138mm
	LSUC 003R0C 3000F EA	3000F	3.0V	0.23mΩ	2663A	<5.0mA	3.75Wh	0.515kg	-40~65°C	Cylindrical	Φ60 X L138mm
	LSUC 003R0C 3400F EA	3400F	3.0V	0.23mΩ	2800A	<8.0mA	4.25Wh	0.515kg	-40~65°C	Cylindrical	Φ60 X L138mm

• Projected life time or cycle life time are varied based on cell type. Data sheet for each product can be downloaded on [www.ultracapacitor.co.kr](http://www.ultracapacitor.co.kr)

## Products




• 2.8/3.0V Lug & Snap-in Type Cell

### Radial Terminal Type



• Radial (3F ~ 50F)

### Lug & Snap-in Terminal Type

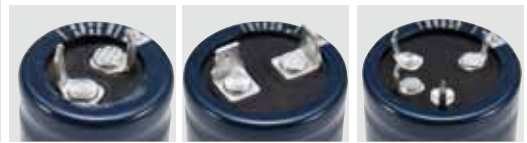

• Snap-in (100F/120F)

• Lug (320F ~ 600F)

• Snap-in (4pin, 350F ~ 600F)



• Cylindrical Type Cell

### Cylindrical Terminal Type



• Short Screw (ST01)


• Weldable (WT01)

• Long Screw (LT01)  
※M16 Terminal

• Long Screw (LT02)  
※M12 Terminal

## Cell/Module Part No. Rule

LS □ □ □ □ R □ □ □ □ F □ □ ( □ □ □ □ )

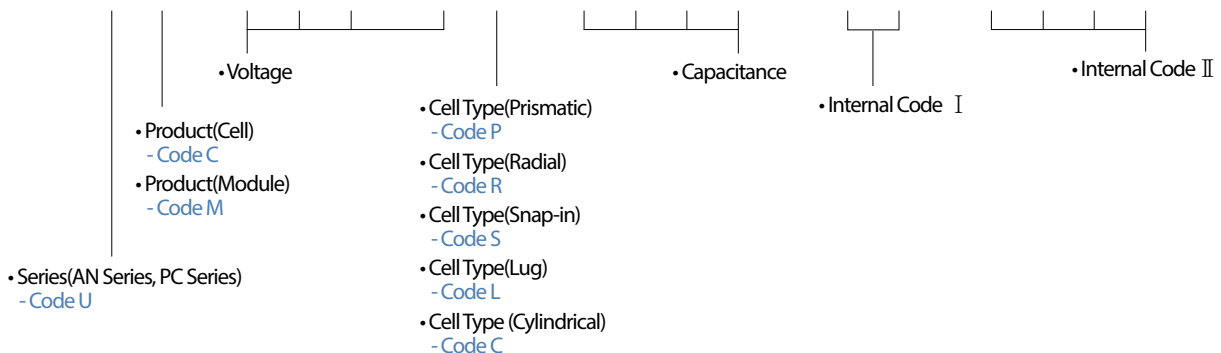

# LS Ultracapacitor Modules

LS Ultracapacitor Modules provide the optimal solution for high voltage and current requirements by connecting Ultracapacitor unit cells in series. Higher voltage and capacitance modules can be built simply by connecting the modules.

Low internal resistance and high working voltage features of LS Mtron modules maximize the available energy while keeping maintenance free, high reliability and wide operating temperature features of LS Ultracapacitor unit cell.

## Features

- Low Internal Resistance
- Balancing and Overvoltage Protection
- Easy Build-up Design for High Voltage Module
- Efficient Heat Transfer to Outside
- Pressure / Moisture Control

LS Ultracapacitor modules are suitable energy storage systems for a wide variety of applications.

## Specifications – PCB Type

Part No.	Capacitance	Rated Voltage	ESR (DC)	Max. Continuous Current ( $\Delta T = 40^{\circ}\text{C}$ )	Leakage Current <sup>(1)</sup>	Energy Density	Weight	Balancing	Monitoring	Operating Temperature Range	Dimension
LSUM016R8L0058FEA	58F	16.8V	22m $\Omega$	20A	<11mA	3.2Wh/kg	0.7kg	Active or Passive	-	-40 ~ 65°C	L245 x W47 x H76.6mm
LSUM162R4L0015FEA	15.5F	162.4V	110m $\Omega$	12A	<32mA	3.0Wh/kg	18.5kg	Passive	Temperature (PTC) / Over Voltage	-40 ~ 65°C	L684 x W202 x H183.5mm
LSUM168R0L0005FEA	5.8F	168V	240m $\Omega$	12A	<25mA	3.5Wh/kg	6.5kg	Passive	Temperature (NTC) / Half Voltage Terminal	-40 ~ 65°C	L235 x W367 x H79mm
LSUM0380R8L0002FEA	2.5F	380.8V	650m $\Omega$	12A	<12mA	2.7Wh/kg	18.4kg	Passive	Temperature (PTC) / Over Voltage	-40 ~ 65°C	L750 x W191 x H163mm

- Leakage Current<sup>(1)</sup> can be changed by Balancing method
- NTC Thermistor & Group voltage monitoring via CAN2.0B
- Customized module can be supplied under the customer's requirement

## Specifications – Busbar Type

Part No.	Capacitance	Rated Voltage	ESR (DC)	Max. Continuous Current ( $\Delta T = 40^{\circ}\text{C}$ )	Leakage Current <sup>(1)</sup>	Energy Density	Weight	Balancing	Monitoring	Operating Temperature Range	Dimension
LSUM016R2C0250FEA AG	250F	16.2V	2m $\Omega$	150A	<3mA	2.3Wh/kg	3.9kg	Active or Passive	Temperature (NTC)	-40 ~ 65°C	L311 x W166 x H70mm
LSUM016R2C0500FEA	500F	16.2V	1.7m $\Omega$	200A	<5mA	3.3Wh/kg	5.6kg	Active or Passive	Temperature (NTC)	-40 ~ 65°C	L672 x W416.2 x H175.9mm
LSUM016R2C0500FEA AG	500F	16.2V	1.7m $\Omega$	200A	<5mA	3.1Wh/kg	5.9kg	Active or Passive	Temperature (NTC)	-40 ~ 65°C	L470 x W166 x H70mm
LSUM032R4C0250FEA	250F	32.4V	3.3m $\Omega$	150A	<11mA	3.6Wh/kg	10kg	Passive	-	-40 ~ 65°C	L137.1 x W426.6 x H184mm
LSUM048R6C0166FEA DC	166F	48.6V	5m $\Omega$	130A	<5mA	3.9Wh/kg	14kg	Active or Passive	Temperature (NTC) / Over Voltage	-40 ~ 65°C	L194.5 x W419.5 x H177mm
LSUM048R6C0166FEA YJ	166F	48.6V	5m $\Omega$	200A	<5mA	3.2Wh/kg	17.2kg	Active or Passive	Temperature (NTC) / Over Voltage	-40 ~ 65°C	L471 x W418 x H71mm
LSUM051R3C0166FEA	166F	51.3V	5m $\Omega$	100A	<28.5mA	5.1Wh/kg	12kg	Active & Passive	Temperature (PTC) / Over Voltage	-40 ~ 65°C	L590.4 x W136 x H171mm
LSUM086R4C0093FEA	93F	86.4V	11.3m $\Omega$	80A	<120mA	3.6Wh/kg	27kg	Passive	Temperature (PT100)	-40 ~ 65°C	L517 x W265 x H210.5mm
LSUM129R6C0062FEA	62F	129.6V	13.2m $\Omega$	260A	<5mA	2.6Wh/kg	55kg	Active or Passive	Temperature & Voltage (CAN2.0B)	-40 ~ 65°C	L720 x W405 x H226mm

- Leakage Current<sup>(1)</sup> can be changed by Balancing method
- NTC Thermistor & Group voltage monitoring via CAN2.0B
- Customized module can be supplied under the customer's requirement

*Busbar Type*



•LSUM 016R2C 0500F EA AG



*Busbar Type*



•LSUM 048R6C 0166F EA YJ



Size Scalable (Up or Down)

*PCB Type*



•LSUM 016R8L 0058F EA



*PCB Type*




•LSUM 168ROL 0005F EA



*Busbar Type*



•LSUM 016R2C 0500F EA



*Busbar Type*



•LSUM 048R6C 0166F EA DC



*Busbar Type*



•LSUM 086R4C 0093F EA




*Busbar Type*



•LSUM 129R6C 0062F EA




# Markets for LS Ultracapacitors




## HEV (Hybrid Electric Vehicle)

- **Auxiliary power**  
Recapture braking energy and compensate peak power load Increase energy efficiency of vehicle
- **Emergency backup power for brake**  
Increase reliability of safety system




## Power Quality Solution (UPS)

- **Instantaneous power compensation**  
Suitable for short time backup (~30 sec)  
Fast reacting time could prevent voltage sag  
Increase power quality for delicate process




## FCEV (Fuel Cell Electric Vehicle)

- **Output load compensation for fuel cell**  
Provide peak power compensation  
(Fuel cell has constant power performance)




## Locomotives

- **Auxiliary power**  
Regenerate energy while braking  
Provide peak power compensation  
Installed in vehicle or station  
Increase energy efficiency




## Hybrid Harbor Crane

- **Auxiliary power**  
Regenerate the energy while lowering the container  
Provide output load compensation during lifting container  
Reduce size of ICE Increase energy efficiency of crane




## Photovoltaic & Solar light

- **Energy storage**
  - Photovoltaic  
Provide energy for motor used in heliostats
  - Solar light  
Store energy generated from the sun light during daytime  
Provide energy for light during night time  
Increase service life of solar light product



## Hybrid Construction & Distribution Equipment

- **Auxiliary power**  
Recapture the energy from equipment operation  
Excavator : Boom movement, Upper part rotation etc  
Forklift : Lowering goods, braking forklift etc  
Provide peak power compensation



## Wind Turbine

- **Emergency backup power**  
Provide emergency power for pitch system  
Increase reliability of pitch system



# Certifications



**ONLINE CERTIFICATION DIRECTORY**

**BBG2.MH4267**  
**Capacitors, Electrochemical - Component**

TRA 81106

ISSUANCE INFORMATION FOR SUBSIDIARY, DEMONSTRATION - COMPONENT

LS MTRON LTD  
 15 MTRON HI-TECH CENTER  
 39, LS-RO, ANYANG-SI, GYEONGGI-DO, KOREA

Model	Range	Quantity	Material	Construction	Electrolyte	Capacitance	Voltage
LSM-1.0V-1000F	A	1000	Aluminum	Aluminum	Aluminum	1000	2.5V
LSM-1.0V-2000F	A	2000	Aluminum	Aluminum	Aluminum	2000	2.5V
LSM-1.0V-3000F	A	3000	Aluminum	Aluminum	Aluminum	3000	2.5V
LSM-1.0V-4000F	A	4000	Aluminum	Aluminum	Aluminum	4000	2.5V
LSM-1.0V-5000F	A	5000	Aluminum	Aluminum	Aluminum	5000	2.5V
LSM-1.0V-6000F	A	6000	Aluminum	Aluminum	Aluminum	6000	2.5V
LSM-1.0V-7000F	A	7000	Aluminum	Aluminum	Aluminum	7000	2.5V
LSM-1.0V-8000F	A	8000	Aluminum	Aluminum	Aluminum	8000	2.5V
LSM-1.0V-9000F	A	9000	Aluminum	Aluminum	Aluminum	9000	2.5V
LSM-1.0V-10000F	A	10000	Aluminum	Aluminum	Aluminum	10000	2.5V
LSM-1.0V-15000F	A	15000	Aluminum	Aluminum	Aluminum	15000	2.5V
LSM-1.0V-20000F	A	20000	Aluminum	Aluminum	Aluminum	20000	2.5V
LSM-1.0V-30000F	A	30000	Aluminum	Aluminum	Aluminum	30000	2.5V
LSM-1.0V-40000F	A	40000	Aluminum	Aluminum	Aluminum	40000	2.5V
LSM-1.0V-50000F	A	50000	Aluminum	Aluminum	Aluminum	50000	2.5V
LSM-1.0V-60000F	A	60000	Aluminum	Aluminum	Aluminum	60000	2.5V
LSM-1.0V-70000F	A	70000	Aluminum	Aluminum	Aluminum	70000	2.5V
LSM-1.0V-80000F	A	80000	Aluminum	Aluminum	Aluminum	80000	2.5V
LSM-1.0V-90000F	A	90000	Aluminum	Aluminum	Aluminum	90000	2.5V
LSM-1.0V-100000F	A	100000	Aluminum	Aluminum	Aluminum	100000	2.5V
LSM-1.0V-150000F	A	150000	Aluminum	Aluminum	Aluminum	150000	2.5V
LSM-1.0V-200000F	A	200000	Aluminum	Aluminum	Aluminum	200000	2.5V
LSM-1.0V-300000F	A	300000	Aluminum	Aluminum	Aluminum	300000	2.5V
LSM-1.0V-400000F	A	400000	Aluminum	Aluminum	Aluminum	400000	2.5V
LSM-1.0V-500000F	A	500000	Aluminum	Aluminum	Aluminum	500000	2.5V
LSM-1.0V-600000F	A	600000	Aluminum	Aluminum	Aluminum	600000	2.5V
LSM-1.0V-700000F	A	700000	Aluminum	Aluminum	Aluminum	700000	2.5V
LSM-1.0V-800000F	A	800000	Aluminum	Aluminum	Aluminum	800000	2.5V
LSM-1.0V-900000F	A	900000	Aluminum	Aluminum	Aluminum	900000	2.5V
LSM-1.0V-1000000F	A	1000000	Aluminum	Aluminum	Aluminum	1000000	2.5V
LSM-1.0V-1500000F	A	1500000	Aluminum	Aluminum	Aluminum	1500000	2.5V
LSM-1.0V-2000000F	A	2000000	Aluminum	Aluminum	Aluminum	2000000	2.5V
LSM-1.0V-3000000F	A	3000000	Aluminum	Aluminum	Aluminum	3000000	2.5V
LSM-1.0V-4000000F	A	4000000	Aluminum	Aluminum	Aluminum	4000000	2.5V
LSM-1.0V-5000000F	A	5000000	Aluminum	Aluminum	Aluminum	5000000	2.5V
LSM-1.0V-6000000F	A	6000000	Aluminum	Aluminum	Aluminum	6000000	2.5V
LSM-1.0V-7000000F	A	7000000	Aluminum	Aluminum	Aluminum	7000000	2.5V
LSM-1.0V-8000000F	A	8000000	Aluminum	Aluminum	Aluminum	8000000	2.5V
LSM-1.0V-9000000F	A	9000000	Aluminum	Aluminum	Aluminum	9000000	2.5V
LSM-1.0V-10000000F	A	10000000	Aluminum	Aluminum	Aluminum	10000000	2.5V
LSM-1.0V-15000000F	A	15000000	Aluminum	Aluminum	Aluminum	15000000	2.5V
LSM-1.0V-20000000F	A	20000000	Aluminum	Aluminum	Aluminum	20000000	2.5V
LSM-1.0V-30000000F	A	30000000	Aluminum	Aluminum	Aluminum	30000000	2.5V
LSM-1.0V-40000000F	A	40000000	Aluminum	Aluminum	Aluminum	40000000	2.5V
LSM-1.0V-50000000F	A	50000000	Aluminum	Aluminum	Aluminum	50000000	2.5V
LSM-1.0V-60000000F	A	60000000	Aluminum	Aluminum	Aluminum	60000000	2.5V
LSM-1.0V-70000000F	A	70000000	Aluminum	Aluminum	Aluminum	70000000	2.5V
LSM-1.0V-80000000F	A	80000000	Aluminum	Aluminum	Aluminum	80000000	2.5V
LSM-1.0V-90000000F	A	90000000	Aluminum	Aluminum	Aluminum	90000000	2.5V
LSM-1.0V-100000000F	A	100000000	Aluminum	Aluminum	Aluminum	100000000	2.5V
LSM-1.0V-150000000F	A	150000000	Aluminum	Aluminum	Aluminum	150000000	2.5V
LSM-1.0V-200000000F	A	200000000	Aluminum	Aluminum	Aluminum	200000000	2.5V
LSM-1.0V-300000000F	A	300000000	Aluminum	Aluminum	Aluminum	300000000	2.5V
LSM-1.0V-400000000F	A	400000000	Aluminum	Aluminum	Aluminum	400000000	2.5V
LSM-1.0V-500000000F	A	500000000	Aluminum	Aluminum	Aluminum	500000000	2.5V
LSM-1.0V-600000000F	A	600000000	Aluminum	Aluminum	Aluminum	600000000	2.5V
LSM-1.0V-700000000F	A	700000000	Aluminum	Aluminum	Aluminum	700000000	2.5V
LSM-1.0V-800000000F	A	800000000	Aluminum	Aluminum	Aluminum	800000000	2.5V
LSM-1.0V-900000000F	A	900000000	Aluminum	Aluminum	Aluminum	900000000	2.5V
LSM-1.0V-1000000000F	A	1000000000	Aluminum	Aluminum	Aluminum	1000000000	2.5V
LSM-1.0V-1500000000F	A	1500000000	Aluminum	Aluminum	Aluminum	1500000000	2.5V
LSM-1.0V-2000000000F	A	2000000000	Aluminum	Aluminum	Aluminum	2000000000	2.5V
LSM-1.0V-3000000000F	A	3000000000	Aluminum	Aluminum	Aluminum	3000000000	2.5V
LSM-1.0V-4000000000F	A	4000000000	Aluminum	Aluminum	Aluminum	4000000000	2.5V
LSM-1.0V-5000000000F	A	5000000000	Aluminum	Aluminum	Aluminum	5000000000	2.5V
LSM-1.0V-6000000000F	A	6000000000	Aluminum	Aluminum	Aluminum	6000000000	2.5V
LSM-1.0V-7000000000F	A	7000000000	Aluminum	Aluminum	Aluminum	7000000000	2.5V
LSM-1.0V-8000000000F	A	8000000000	Aluminum	Aluminum	Aluminum	8000000000	2.5V
LSM-1.0V-9000000000F	A	9000000000	Aluminum	Aluminum	Aluminum	9000000000	2.5V
LSM-1.0V-10000000000F	A	10000000000	Aluminum	Aluminum	Aluminum	10000000000	2.5V
LSM-1.0V-15000000000F	A	15000000000	Aluminum	Aluminum	Aluminum	15000000000	2.5V
LSM-1.0V-20000000000F	A	20000000000	Aluminum	Aluminum	Aluminum	20000000000	2.5V
LSM-1.0V-30000000000F	A	30000000000	Aluminum	Aluminum	Aluminum	30000000000	2.5V
LSM-1.0V-40000000000F	A	40000000000	Aluminum	Aluminum	Aluminum	40000000000	2.5V
LSM-1.0V-50000000000F	A	50000000000	Aluminum	Aluminum	Aluminum	50000000000	2.5V
LSM-1.0V-60000000000F	A	60000000000	Aluminum	Aluminum	Aluminum	60000000000	2.5V
LSM-1.0V-70000000000F	A	70000000000	Aluminum	Aluminum	Aluminum	70000000000	2.5V
LSM-1.0V-80000000000F	A	80000000000	Aluminum	Aluminum	Aluminum	80000000000	2.5V
LSM-1.0V-90000000000F	A	90000000000	Aluminum	Aluminum	Aluminum	90000000000	2.5V
LSM-1.0V-100000000000F	A	100000000000	Aluminum	Aluminum	Aluminum	100000000000	2.5V
LSM-1.0V-150000000000F	A	150000000000	Aluminum	Aluminum	Aluminum	150000000000	2.5V
LSM-1.0V-200000000000F	A	200000000000	Aluminum	Aluminum	Aluminum	200000000000	2.5V
LSM-1.0V-300000000000F	A	300000000000	Aluminum	Aluminum	Aluminum	300000000000	2.5V
LSM-1.0V-400000000000F	A	400000000000	Aluminum	Aluminum	Aluminum	400000000000	2.5V
LSM-1.0V-500000000000F	A	500000000000	Aluminum	Aluminum	Aluminum	500000000000	2.5V
LSM-1.0V-600000000000F	A	600000000000	Aluminum	Aluminum	Aluminum	600000000000	2.5V
LSM-1.0V-700000000000F	A	700000000000	Aluminum	Aluminum	Aluminum	700000000000	2.5V
LSM-1.0V-800000000000F	A	800000000000	Aluminum	Aluminum	Aluminum	800000000000	2.5V
LSM-1.0V-900000000000F	A	900000000000	Aluminum	Aluminum	Aluminum	900000000000	2.5V
LSM-1.0V-1000000000000F	A	1000000000000	Aluminum	Aluminum	Aluminum	1000000000000	2.5V
LSM-1.0V-1500000000000F	A	1500000000000	Aluminum	Aluminum	Aluminum	1500000000000	2.5V
LSM-1.0V-2000000000000F	A	2000000000000	Aluminum	Aluminum	Aluminum	2000000000000	2.5V
LSM-1.0V-3000000000000F	A	3000000000000	Aluminum	Aluminum	Aluminum	3000000000000	2.5V
LSM-1.0V-4000000000000F	A	4000000000000	Aluminum	Aluminum	Aluminum	4000000000000	2.5V
LSM-1.0V-5000000000000F	A	5000000000000	Aluminum	Aluminum	Aluminum	5000000000000	2.5V
LSM-1.0V-6000000000000F	A	6000000000000	Aluminum	Aluminum	Aluminum	6000000000000	2.5V
LSM-1.0V-7000000000000F	A	7000000000000	Aluminum	Aluminum	Aluminum	7000000000000	2.5V
LSM-1.0V-8000000000000F	A	8000000000000	Aluminum	Aluminum	Aluminum	8000000000000	2.5V
LSM-1.0V-9000000000000F	A	9000000000000	Aluminum	Aluminum	Aluminum	9000000000000	2.5V
LSM-1.0V-10000000000000F	A	10000000000000	Aluminum	Aluminum	Aluminum	10000000000000	2.5V
LSM-1.0V-15000000000000F	A	15000000000000	Aluminum	Aluminum	Aluminum	15000000000000	2.5V
LSM-1.0V-20000000000000F	A	20000000000000	Aluminum	Aluminum	Aluminum	20000000000000	2.5V
LSM-1.0V-30000000000000F	A	30000000000000	Aluminum	Aluminum	Aluminum	30000000000000	2.5V
LSM-1.0V-40000000000000F	A	40000000000000	Aluminum	Aluminum	Aluminum	40000000000000	2.5V
LSM-1.0V-50000000000000F	A	50000000000000	Aluminum	Aluminum	Aluminum	50000000000000	2.5V
LSM-1.0V-60000000000000F	A	60000000000000	Aluminum	Aluminum	Aluminum	60000000000000	2.5V
LSM-1.0V-70000000000000F	A	70000000000000	Aluminum	Aluminum	Aluminum	70000000000000	2.5V
LSM-1.0V-80000000000000F	A	80000000000000	Aluminum	Aluminum	Aluminum	80000000000000	2.5V
LSM-1.0V-90000000000000F	A	90000000000000	Aluminum	Aluminum	Aluminum	90000000000000	2.5V
LSM-1.0V-100000000000000F	A	100000000000000	Aluminum	Aluminum	Aluminum	100000000000000	2.5V
LSM-1.0V-150000000000000F	A	150000000000000	Aluminum	Aluminum	Aluminum	150000000000000	2.5V
LSM-1.0V-200000000000000F	A	200000000000000	Aluminum	Aluminum	Aluminum	200000000000000	2.5V
LSM-1.0V-300000000000000F	A	300000000000000	Aluminum	Aluminum	Aluminum	300000000000000	2.5V
LSM-1.0V-400000000000000F	A	400000000000000	Aluminum	Aluminum	Aluminum	400000000000000	2.5V
LSM-1.0V-500000000000000F	A	500000000000000	Aluminum	Aluminum	Aluminum	500000000000000	2.5V
LSM-1.0V-600000000000000F	A	600000000000000	Aluminum	Aluminum	Aluminum	6000000	

# Global Network

## Subsidiaries

### LSEQ

Yu-Huangng Industrial Area, Xiazhuang,  
Chengyang Dt, Qingdao, 266109 China  
Tel : +86-532-8096-2200 Fax : +86-532-8096-2288

### LSMW

LS Industrial Park, Xin Mei Rd, National High-tech  
Industrial Development Zone, Wuxi,  
Jiangsu Province, 214028 China  
Tel : +86-510-8299-3888 Fax : +86-510-8299-3889

### LSMQ

Yu-Huangng Industrial Area, Xiazhuang, Chengyang  
District, Qingdao, China 266109  
Tel : +86-532-8096-5618 Fax : +86-532-8096-5616

### LSTA

PO Box 70, 6900 Corporation Parkway,  
Battletboro, NC 27809, USA  
Tel : +1-252-984-0700 Fax : +1-252-984-0701

### LSMB

Rua Vereador Klaus Lennertz, 2013, Palmital,  
Garuva/SC Brazil  
Tel : +55-47-3422-4563

### LSEV

No. 05, Street 11, VSIP Bac Ninh, Tu son Town,  
Bac Ninh Province, Vietnam  
Tel : +84-[0]241-3765-630/631

### LSMI

Jl. Samsung 2 Blok D3A. Jababeka UKM Center  
Segitiga Emas, Eesa Mekarmukti, Kec, Cikarang Utara,  
Kab. Bekasi 17550-INDONESIA  
Tel : +62-21-8326-7740

## Branches

### Hanoi Office

CHARMVIT Tower 10F #17 117 TRAN DUY HUNG STREET,  
CAU GIAY DISTRICT, HANOI, VIETNAM  
Tel: 84 – 24 – 3201 - 1572

### Poland Office

ul. Legnicka 17/7,53-671 Wroclaw Poland  
Tel : +48-71-349-77-58

### Atlanta Office

6670 Jones Mill Ct. Norcross GA 30092  
Tel : +1-770-674-74

- LS Mtron's overseas corporations
- LS Mtron's overseas branches (offices)
- LS Mtron's subsidiaries (overseas corporations)

LSTA ■

■ Atlanta Branch Office

■ LSMB

## Korea Operations



**LS TOWER, Hi-Tech Center**  
 (Head office, Electronic Components, Ultracapacitors, R&D Center, Sales)



**Jeonju Plant, Engine Plant**  
 (Tractors, Injection Molding Systems, Track Shoes, Tractor Engine)

(Domestic Business Locations)



■ Poland Office





*Outstanding People, Best-in-Class Product, Winning Partnership*

**LS** Mtron  
[www.lsmtron.com](http://www.lsmtron.com)  
[www.ultracapacitor.co.kr](http://www.ultracapacitor.co.kr)

**Contact Information** | Tel. +82-31-8045-9609  
E-mail. [ultracapacitor@lsmtron.com](mailto:ultracapacitor@lsmtron.com)

LS Mtron Hi-tech center, 39, 116beon-gil, LS-ro, Dongan-gu, Anyang-si, Gyeonggi-do, 14118, Korea

©2019 LS Mtron, Ltd. All right reserved. This product or document is protected by copyright and distributed under licenses restricting its use, copying, distribution, and decompilation. No part of this product or document may be reproduced in any form by any means without prior written authorization of LS Mtron and its licensors, if any.