


CAPXON

ELECTROLYTIC CAPACITORS

HYBRID POLYMER TYPES




Best Performance

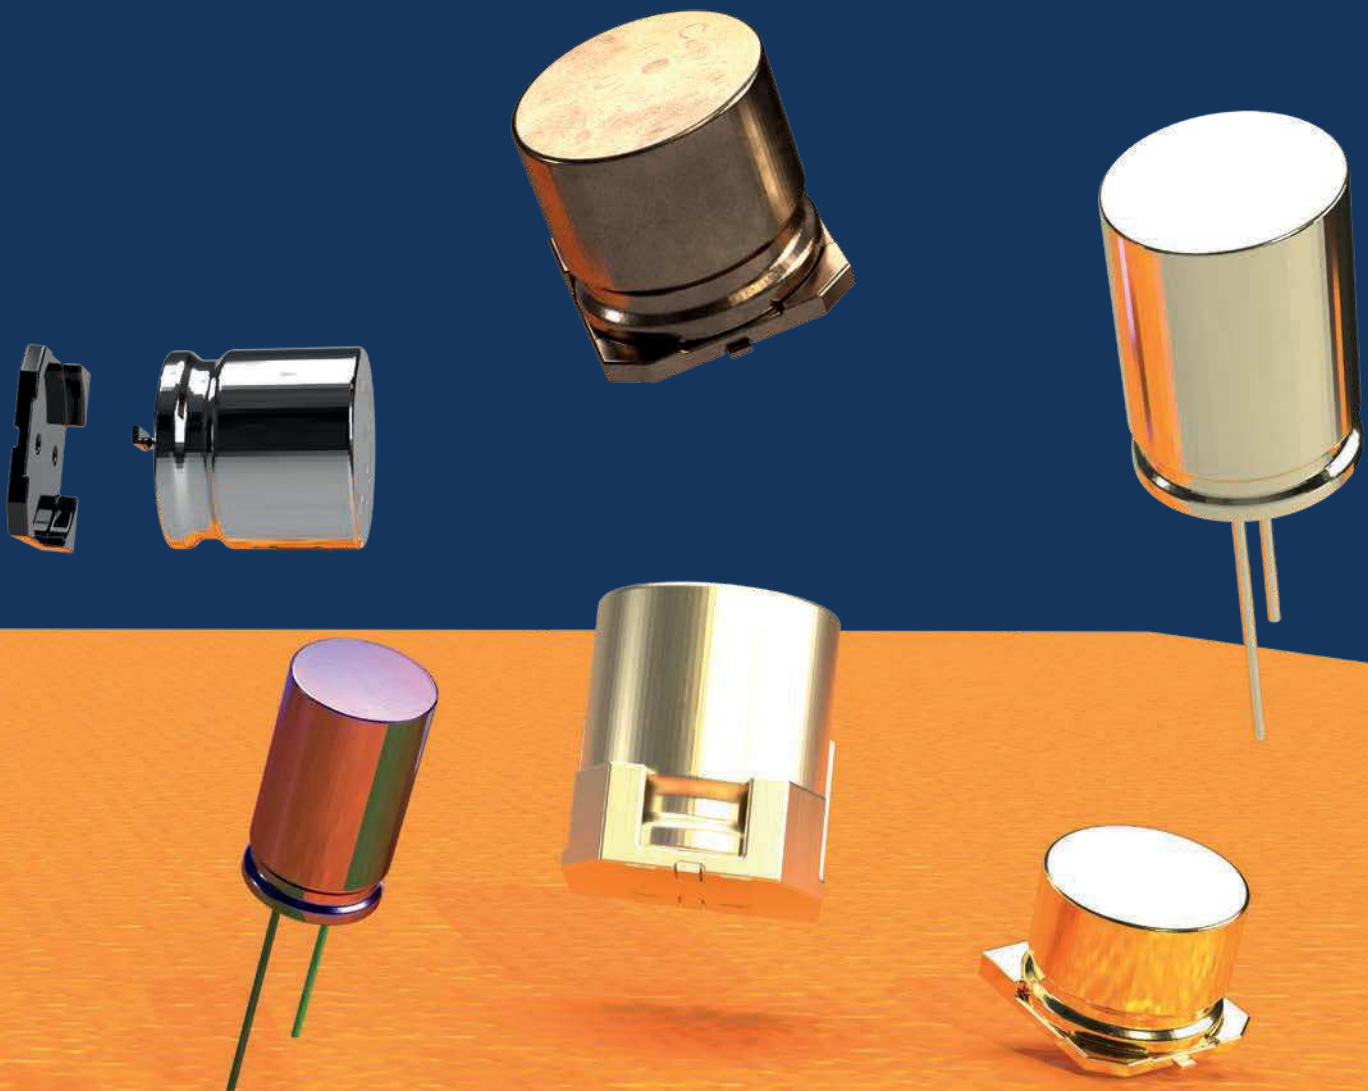


CONTENT

| WORLD OF CAPXON | | Page |
|---|---|-------------|
| | GENERAL INFORMATION | |
| | About us | 4 |
| | Overview Capacitor Technologies | 5 |
| | Technology Comparison | 6 |
| | FURTHER INFORMATION | |
| | Certification | 7 |
| | Smart Production | 8 |
| | Advanced Technology | 9 |
| | New Research | 10 |
| | Component Reliability Data | 11 |
| | Quality and Environmental Management | 17 |
| | AEC-Q200 and Automotive Requirements | 20 |
| | Lifetime Estimation ▪ Lifetime Compendium | 21 |
| | Technical Notes ▪ Technical Compendium | 22 |
| | Application Examples | 23 |
| | Technical Terms | 26 |
| | Notes | 104 |
| HYBRID CONDUCTIVE POLYMER CAPACITORS | | Page |
| | SMD TYPE | |
| | Overview ▪ Selection Table | 27 |
| | Datasheets | 28 |
| | Product Code and Marking | 81 |
| | Taping and Packaging | 82 |
| | Dimensions and PAD Layout | 85 |
| | Vibration Specifications | 88 |
| | General Precautions and Guidelines | 96 |
| | Soldering Specifications | 102 |

CONTENT

| HYBRID CONDUCTIVE POLYMER CAPACITORS | | Page |
|---|---|------------|
|  | RADIAL TYPE | |
| | Overview - Selection Table | 60 |
| | Datasheets | 61 |
| | Product Code and Marking | 89 |
| | Taping | 90 |
| | Packaging | 92 |
| | Available Lead Treatments | 94 |
| | General Precautions and Guidelines | 96 |
| | Soldering Specifications | 103 |

10 FACTS ABOUT CAPXON

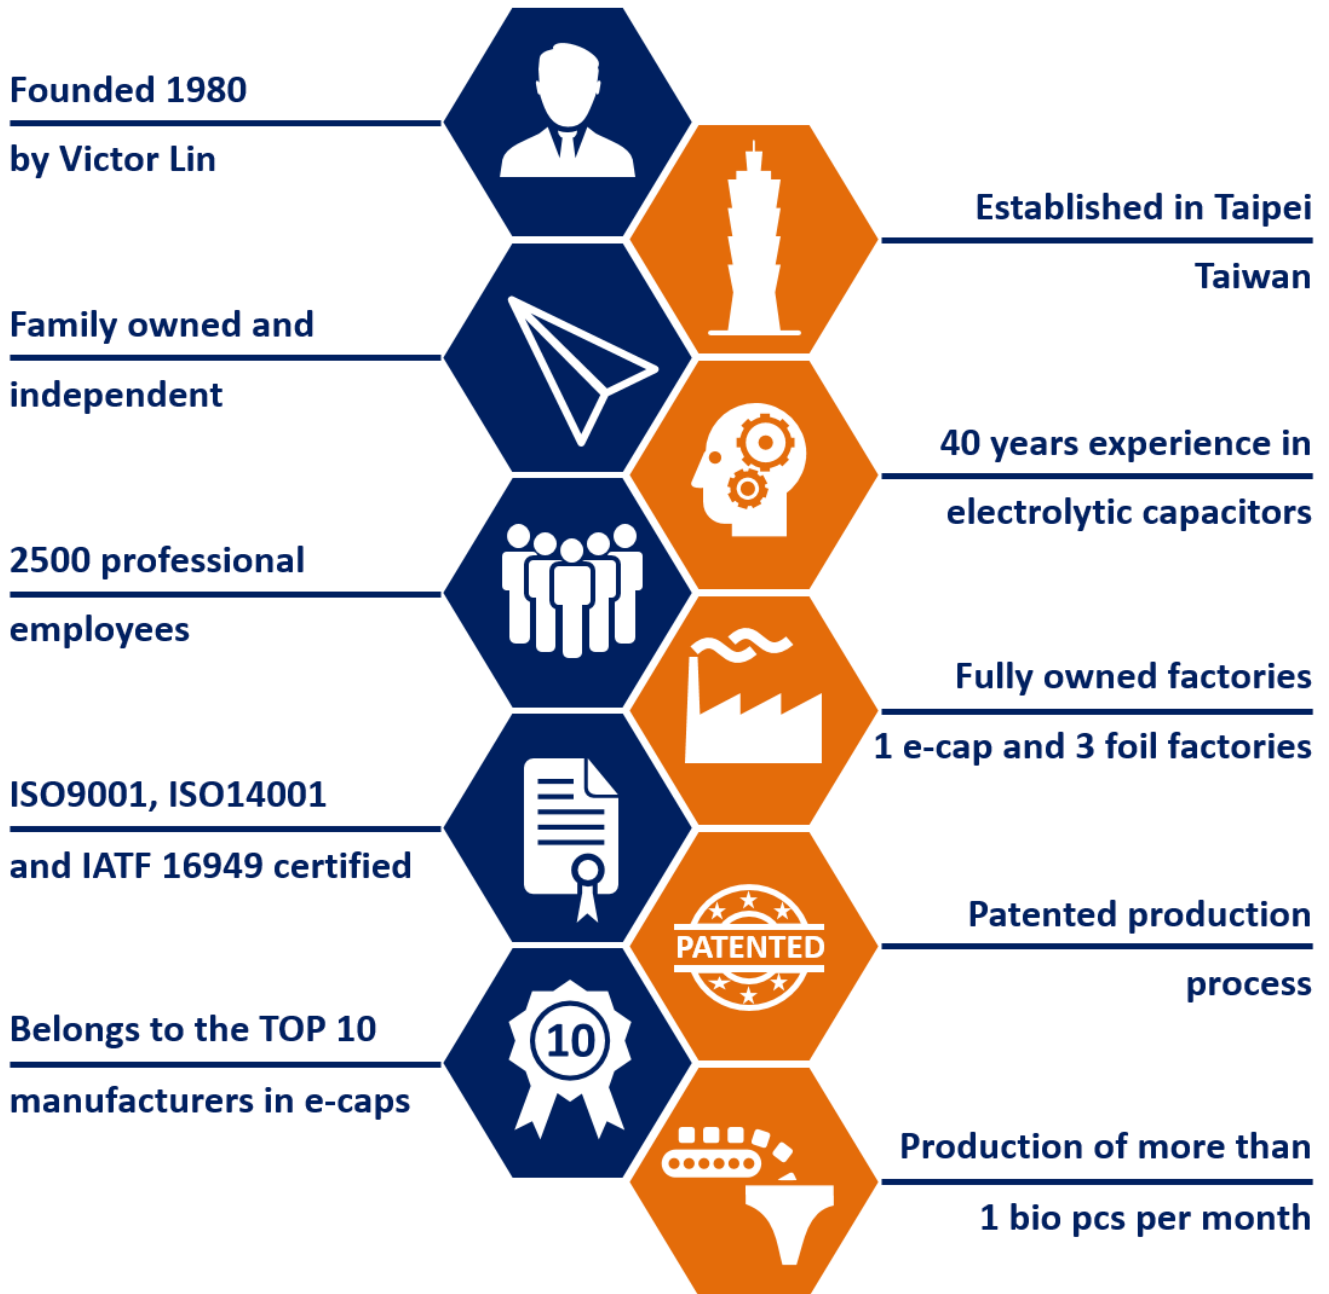

A WORLD OF ELECTROLYTIC CAPACITORS

CapXon's know-how in Electrolytic Capacitors covers technologies with aluminium foil. These are Aluminum Electrolytics, Solid Conductive Polymers and the combination known as Hybrid Conductive Polymers:

| Aluminum Electrolytic | Description | Features |
|---------------------------|---|---|
| | <p>Rated Voltage • V_R</p> <p>Cathode Material</p> <p>Self-healing of Dielectric</p> <p>Package</p> <p>Stability</p> <p>Lifetime</p> <p>Reliability</p> | <p>4 VDC to 650 VDC</p> <p>Liquid Electrolyte</p> <p>Yes</p> <p>Widest range in all sizes</p> <p>Reduced performance at low temperature</p> <p>Limited life at high temperature</p> <p>Automotive AEC-Q200 qualified</p> |
| Solid Conductive Polymer | Description | Features |
| | <p>Rated Voltage • V_R</p> <p>Cathode Material</p> <p>Self-Healing of Dielectric</p> <p>ESR</p> <p>Stability</p> <p>Lifetime</p> <p>Reliability</p> | <p>2.5 VDC to 100 VDC</p> <p>Solid Conductive Polymer</p> <p>No</p> <p>Ultra-low ESR at high frequency</p> <p>Stable for low and high temperature</p> <p>Very stable and long life - no dry out</p> <p>Only internal standard qualification</p> |
| Hybrid Conductive Polymer | Description | Features |
| | <p>Rated Voltage • V_R</p> <p>Cathode Material</p> <p>Self-Healing of Dielectric</p> <p>ESR</p> <p>Stability</p> <p>Leakage Current • I_{LEAK}</p> <p>Reliability</p> | <p>16 VDC to 400 VDC</p> <p>Solid Conductive Polymer & Liquid Electrolyte</p> <p>Yes</p> <p>Very low ESR at high frequency</p> <p>Even more stable than liquid type</p> <p>Lower leakage current than Solid Conductive Polymer Type</p> <p>Automotive AEC-Q200 qualified</p> |

COMPARISON OF ELECTROLYTIC CAPACITOR TECHNOLOGIES

| Characteristics | Aluminum Electrolytic Capacitor | Solid Conductive Polymer Capacitor | Hybrid Conductive Polymer Capacitor |
|---------------------------------------|--|--|--|
| ESR at High Frequency | ● (120 ~ 1 000 mΩ) | ++ (7 ~ 15 mΩ) | + (20 ~ 30 mΩ) |
| Leakage Current · I _{LEAK} | ++ (0.01·C _R ·V _R) | ● (0.2·C _R ·V _R) | ++ (0.01·C _R ·V _R) |
| Ripple Current · I _R | ● (~ 600 mA) | ++ (2 000 ~ 7 000 mA) | + (2 000 ~ 3 000 mA) |
| Rated Voltage · V _R | ++ (~ 700 V) | ● (~ 100 V) | + (~ 400 V) |
| Operating Temperature Characteristics | + (-40 ~ + 125 °C) | + (-55 ~ + 125 °C) | ++ (-55 ~ + 150 °C) |
| Low Temperature Characteristics | ● (-40 ~ + 125 °C) | ++ (-55 ~ + 125 °C) | + (-55 ~ + 150 °C) |
| Lifetime | ● (105 °C / 3 000h) | ++ (105 °C / 5 000h) | ++ (105 °C / 10 000h) |
| Failure Mode | + Open | ● Short | + Open |

++ ... best performance

+ ... well performance

● ... basic performance

CERTIFICATION ACCORDING TO INTERNATIONAL STANDARDS

Quality, the environment, safety, and conservation of resources are the focus of our daily added value.

To meet the high requirements in the electronics industry, CapXon, as a global company, is certified according to the highest international standards. In this way, we ensure that all procedures and processes in our company are always structured and continuously optimized based on the valid and defined requirements.

CapXon is certified according to the following standards:



ISO 9001



ISO 14001




IATF 16949



ISO 50001



OHSAS 18001

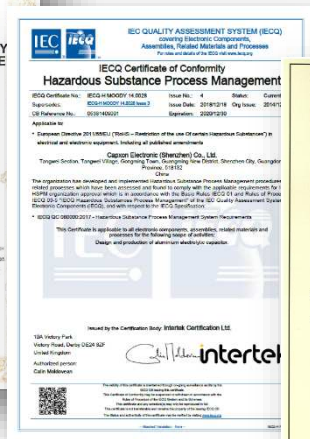

OC 080000



China RoHS



ISO/IEC 17025

SMART PRODUCTION

Since 1980 CapXon focuses on research, development and manufacturing of Aluminum Electrolytic Capacitors and is a leading brand with its own capacitor production in Shenzhen and its own foil production in Yichang, Qinghai and Baotou. 40 years of experience give us a deep understanding of foil material, high performance electrolytes, advance lead wire technology, conductive polymer and electrochemical systems.

Precision equipment ensures the quality of key components



Capacitor production for all core technologies as Aluminium Electrolytic, Solid Conductive and Hybrid Conductive Polymer capacitors with R&D and Quality headquarters in Shenzhen

Development of our own production process and machinery with the highest grade of automated production equipment and software



ADVANCED TECHNOLOGY

Only with the best production equipment and well-trained staff is it possible to maintain and expand the market position. Every year CapXon invests very large sums in machine, software and the education for our more than 2500 employees. To recognize deviation immediately during the production process, CapXon uses various precise inspection equipment.

All productions are qualified with strict specifications and every operation is monitored and measured at the machine



The products and the production meet the requirements of all industries even Medical or Automotive

Automated and full controlled manufacturing process



NEW RESEARCH

Highly roughened and formed anode foils are the heart of every Aluminum Electrolytic Capacitor. CapXon has been conducting intensive research and development for decades to bring low-voltage and high-voltage films into new spheres and at the same time to optimize processability and durability. The electrolytes and conductive polymers used on the cathode side are subject to a continuous improvement process, taking commercial and technical aspects into account.

Electrolyte and polymer development to achieve maximum product reliability and a long life



High grade etching foil, high grade forming foil through consistent further development to the limit of what is technically feasible

Well-equipped ISO/IEC 17025: 2005 accredited laboratories for research, analysis and testing



COMPONENT RELIABILITY DATA

In this section, the main parameters for predictive reliability and availability calculations are explained and in which way CapXon can provide you with such data.

FAILURE RATE λ

The failure rate λ describes the frequency which components possibly fail. The failure rate describes how many defects can be expected, if you run the application in operation for a certain time.

The failure rate can be calculated as following:

$$(1) \quad \lambda = \frac{n}{N \cdot t}$$

- n ... Number of defect components
- N ... Number of tested components
- t ... Amount of operating hours

FAILURE CRITERIA

Capacitors will show certain wear-out phenomenon's by aging and so as times goes by the capacitors can possibly change their electrical performance.


As soon as the component is no longer fulfilling their electrical spec, stated features or with customer agreed parameters, the status of capacitor is seen as in failure mode or defect. This does not necessarily mean that the application will fail. An essential influence are the design and dimensioning by customer, which lead to major impact on possible failure modes and fail criteria for the application itself.

All given data by CapXon is just concerning the failure mode cases of the single component and is not representing the complexity of complete applications, assembled systems nor full electronic PCB boards.

BATHTUB CURVE

It's a widely used model within the reliability engineering to describe the expected failure rates over the whole application lifetime / product life cycle.

λ - Failure Rate

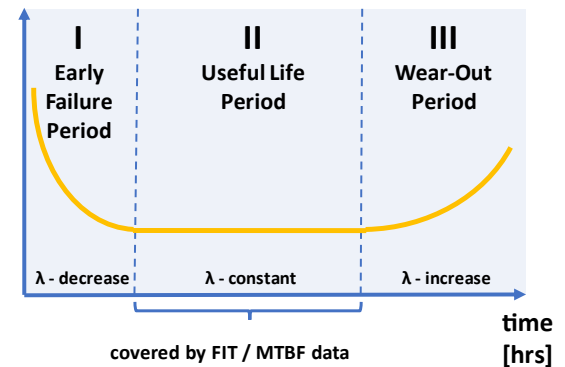

Bathtub curve

The Bathtub Curve states the failure rate behaviour within the three different product life cycle stages. These are the Early Failure Period, the Useful Life Period and the Wear Out Period.

With production control, monitoring and quality assurance, it is possible to reduce the early failures to a best possible minimum.

Failures within the Useful Life Period, which are described as FIT or MTBF value, are defined as events of coincidence and are not representing any systematic or epidemic failures.

FIT – FAILURES IN TIME

FIT - Failures In Time is the common way to describe the expected failure rate for electronics.

The FIT values describe certain failure rate within the useful life period and provides the basis for calculations, assumptions and extrapolation of reliability and availability to gather the understanding for expected failures / defects. These calculated figures are used to decide whether the component is a proper choice for the desired use case. Additionally, it need to be clarified whether redundancies are necessary and which redundancies are needed to fulfil the desired mission profile of an application.

The unit FIT defines the expected amount of failures per application hour.

$$(2) \quad 1 \text{ FIT} = \frac{10^{-9}}{h} = \frac{10^{-9} \text{ failures}}{\text{per operating hour}}$$

So as higher the stated FIT value is, as higher the statistical chance of defect is.

Please find the following example of a failure rate test determined by a useful life test:

- Number of failures $n = 2$
- Number of tested components $N = 10\ 000$
- Operating hours $t = 20\ 000\ h$

$$(3) \quad \lambda = \frac{n}{N \cdot t} = \frac{2}{10\ 000 \cdot 20\ 000\ h} = 10\ FIT$$

$$(4) \quad 10\ FIT = \frac{10^{-8}}{h} = \frac{0.001\%}{1\ 000\ h}$$

MTBF - MEANTIME BETWEEN FAILURES

It's the predicted elapsed time between inherent failures of an electronic system during normal operation. The MTBF can be calculated as arithmetic mean / average time between failures of a system.

Assuming a constant failure rate, the MTBF can be easily calculated by reciprocal value of the Failure Rate λ :

$$(5) \quad MTBF = \frac{1}{\lambda}$$

MTBF is just a different way to describe the failure rate and can be easily converted to FIT and vice versa:

$$(6) \quad MTBF = \frac{10^9\ h}{FIT} = \frac{114\ 000\ years}{FIT}$$

$$(7) \quad FIT = \frac{10^9\ h}{MTBF} = \frac{114\ 000\ years}{MTBF}$$

The **MTBF** values are just covering the useful life period (flat middle section) of the bathtub curve. Because of this, a FIT or MTBF value can't be extrapolated to estimate the service lifetime for a component. FIT or MTBF values doesn't cover the higher failure rates of the wear-out period, where the expected failure rate would be higher due to occurring wear-out phenomenon's.

LIFETIME TESTS

Due to the fact that all electrolytic capacitors show aging behaviour and a possible drift of electrical parameters over usage time, lifetime tests are performed by manufacturers to describe the related reliability and performance of a certain capacitor. Different product series as well as the single product itself can provide very different lifetime performance. So, these test results are given to select the proper product in relation to the applied stress profile of application to gain the desired application performance within the whole product life cycle.

There are various names (e.g. Endurance, Load Life, Useful Life, Operational Life, Life Expectancy, Shelf Life, ...) and different lifetime tests that are existing within the industry. Please kindly check the specific test specification and given data for the capacitor before design-in.

Sadly, there is no standardized naming and test criteria existing, given by any international accepted standard committee for all the lifetime tests, which are applied to electrolytic capacitors. Customers need to compare competitor products carefully with each other to see if test specifications are similar or different.

Please see particular datasheets for the specific test results and criteria of an individual product of CapXon.

Again, please note that the criteria of failure are given by the test specification limits of the dedicated lifetime test and as soon as a component is not fulfilling these given limits, it is rated as a failure. So, failure does not necessarily mean defect or breakdown of application. It is just describing that the drift of electrical performance is bigger than the checked limits of the particular test. It doesn't matter whether the measured C value is lower as the allowed test limit or the component is in a failure mode of open circuit, both cases are treated the same as a failure. Design and dimensioning of application will arrange how much drift of electrical parameters can be accepted for the individual capacitor. For example, when the rate of capacitance change is becoming critical within the application is defined by customer design. The lifetime tests are in place to provide a common and industry-wide comparable performance index of the capacitors.

As manufacturer, we can state and check how fast a drift of capacitance and further parameters will happen. Dimensioning within application design will set how long an error-free operation is possible. A proper dimensioning can enlarge the acceptable drift and so the lifetime performance. But be aware, if it is not done properly or component is overstressed, it also can shorten the expected lifetime performance. Please be aware to check dimensioning and drift estimation to assure your product performance for the desired lifetime. For support with lifetime estimations and dimensioning, we are pleased to support you and feel free to get in touch with our technical support.

In the following section CapXon's lifetime tests, which are performed with our products, are described in detail.

ENDURANCE

The Endurance test of the product checks the performance of its electrical parameters, such as capacitance change, leakage current and dissipation factor on their behaviour over time at a predetermined test setup of electrical stress and ambient condition.

Depending on the product series, the Endurance test is performed according to one of the settings below:

Setting 1 - applying Endurance test:

- max. Temperature
- V_R - Rated Voltage

Setting 2 - applying Endurance test:

- max. Temperature
- V_R - Rated Voltage
- I_R - Rated Ripple

Setting 1 is in accordance to the IEC 60364-4 / JIS 51001-4 test criteria and Setting 2 is enlarging the electrical stress setup with additional appliance of I_R , to get a more representative result in comparison to possible real-life application stress.

The Endurance test is performed within product qualification at the stage of internal product validation and is repeated periodically for product requalification.

USEFUL LIFE

To get more representative understanding of lifetime performance for typical capacitor use, the useful life test represents such criteria.

The applied electrical stress is like the Endurance test - Setting 2. The test specification limits are wider as the endurance test specification, but as described the applied electrical stress stays similar. So, a larger acceptable drift of electrical parameters results in a larger expected lifetime. This represents the operational frame which is set by customer at dimensioning the capacitor specification for their application and the possible borders of an error-free operation.

Also, we state a FIT value related to the useful life test. These failure rate describes the deviation / possibility of occurrence of failures within the useful life period when the settings of useful life test are applied. This is related to the middle section of the bathtub curve the so-called useful life period (see above page 12 - Bathtub Curve of Product Reliability).

In the datasheet you will find the following phrase:

Failure Rate (during useful Life): 1%/1 000h with a confidence level of 60%. As a result, this is like a 10 000 FIT:

$$\lambda = \frac{1\%}{h} = 10\,000 \text{ FIT} = 10\,000 \text{ failures} * 10^{-9h}$$

Example:

If you have 8 000 components running in applications for 5 000 hours with the test conditions applied like the useful life test, you can estimate the number of components that show a higher drift as given by the useful life test spec borders as follows:

- Number of components $N = 8\,000$
- Operating hours $t = 5\,000 \text{ h}$

$$\lambda = \frac{n}{N * t}$$

$$n = \lambda * N * t = \frac{1\%}{1\,000h} * 8\,000 * 5\,000h = 400$$

This means that when there are 8 000 pcs in operation for 5 000 hours at the maximum possible operating conditions (max. temp., V_R & I_R similar to useful life test criteria) an amount of 400 products (with a confidence level of 60%) can be expected to show a higher drift as given in the test spec.

SHELF LIFE

The shelf life test simulates the aging of the capacitor, if it is just stressed with ambient temperature without any electrical load. The shelf life is not defining the possible storage time of the capacitor but just to describe the aging situation before mounting / PCB assembly.

The Shelf Life test criteria shall be satisfied, if the capacitor was restored to 20°C and following a conditioning by voltage treatment in accordance with 4.1 of JIS 5101-4 was applied, before measuring the capacitor.

LIFETIME TEST EXAMPLES

Example 1 - Useful Life, Endurance (Setting 1) and Shelf life tests of SMD types – HV Series:

| Lifetime Test | | Test | 2000 hours |
|--|--|-----------------------------------|------------|
| Endurance 105°C (V _r applied) | ΔC/C | ≤ ±30% of initial measured value | |
| | tanδ | ≤ 300% of initial specified value | |
| | I _{leak} | ≤ the initial specified value | |
| | | | |
| Shelf Life 105°C (None) | Test | 1000 hours | |
| | ΔC/C | ≤ ±30% of initial measured value | |
| | tanδ | ≤ 300% of initial specified value | |
| | I _{leak} | ≤ the initial specified value | |
| Resistance to Soldering Heat | The capacitors shall be kept on a hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the characteristic requirements listed below | | |
| | ΔC/C | Within ±10% of initial value | |
| | tanδ | Less than specified value | |
| | I _{leak} | Less than specified value | |

Example 2 - of Useful Life, Endurance (Setting 2) and Shelf life tests of Radial types – GF Series

| Lifetime Test | | Test | 2000 hours | 3000 hours | 5000 hours | φ D 5 ~ 6.3 mm | φ D 8 mm | φ D ≥ 10 mm |
|---|-------------------|-----------------------------------|------------|------------|------------|----------------|----------|-------------|
| Endurance 105°C (V _r & I _r applied) | ΔC/C | ≤ ±20% of initial measured value | | | | | | |
| | tanδ | ≤ 200% of initial specified value | | | | | | |
| | I _{leak} | ≤ the initial specified value | | | | | | |
| | | | | | | | | |
| Shelf Life 105°C (None) | Test | 1000 hours | | | | | | |
| | ΔC/C | ≤ ±20% of initial measured value | | | | | | |
| | tanδ | ≤ 200% of initial specified value | | | | | | |
| | I _{leak} | ≤ the initial specified value | | | | | | |

Example 3 - of Useful Life, Endurance (Setting 2) and Shelf life tests of Snap In types – HU Series:

| Lifetime Test | | Test | V _r ≤ 100V | V _r > 100V |
|---|-------------------|-----------------------------------|-----------------------------------|-----------------------|
| Useful Life 105°C (V _r & I _r applied) | Test | 5000 hours | 8000 hours | |
| | ΔC/C | ≤ ±30% of initial measured value | ≤ ±20% of initial measured value | |
| | tanδ | ≤ 300% of initial specified value | ≤ 200% of initial specified value | |
| | I _{leak} | ≤ the initial specified value | ≤ the initial specified value | |
| Endurance 105°C (V _r applied) | Test | 3000 hours | | |
| | ΔC/C | ≤ ±15% of initial measured value | ≤ ±10% of initial measured value | |
| | tanδ | ≤ 130% of initial specified value | ≤ 130% of initial specified value | |
| | I _{leak} | ≤ the initial specified value | ≤ the initial specified value | |
| Shelf Life 105°C (None) | Test | 1000 hours | | |
| | ΔC/C | ≤ ±15% of initial measured value | ≤ ±10% of initial measured value | |
| | tanδ | ≤ 130% of initial specified value | ≤ 130% of initial specified value | |
| | I _{leak} | ≤ the initial specified value | ≤ the initial specified value | |

Example 4 - Useful Life, Endurance (Setting 2) and Shelf life tests of Screw types – RK Series:

| Lifetime Test | | Test | 4000 hours |
|---|-------------------|-----------------------------------|------------|
| Useful Life 105°C (V _r & I _r applied) | ΔC/C | ≤ ±45% of initial measured value | |
| | tanδ | ≤ 300% of initial specified value | |
| | I _{leak} | ≤ the initial specified value | |
| | | | |
| Endurance 105°C (V _r applied) | Test | 2000 hours | |
| | ΔC/C | ≤ ±15% of initial measured value | |
| | tanδ | ≤ 130% of initial specified value | |
| | I _{leak} | ≤ the initial specified value | |
| Shelf Life 105°C (None) | Test | 1000 hours | |
| | ΔC/C | ≤ ±15% of initial measured value | |
| | tanδ | ≤ 130% of initial specified value | |
| | I _{leak} | ≤ the initial specified value | |

TELCORDIA SR-332

This industry-wide accepted standard provides data and tools for reliability predictions of components, devices or full hardware units of electronic equipment. Telcordia (for-

merly Bellcore). With the given figures and data, it is possible to assure system availability and to gather the desired system reliability.

FIT & MTBF DATA OF CAPXON PRODUCTS

CapXon provides FIT & MTBF values based on Telcordia SR332 standard for all components. From our perspective, it provides more reliable prediction because it is more specific and detailed than MIL-217 or Siemens SN 29500.

Please find the FIT values for CapXon components and application-based reliability prediction calculations on the following page.

The table of SMD / RADIAL / Snap-In is covering all Electrolytic Technologies – Liquid, Solid and Hybrid Electrolytic Capacitors in SMD & Radial.

The table of Screw capacitors is just concerning Liquid Aluminum Electrolytic Capacitors.

| Mounting Type | SMD / Radial / Snap-In | | | | | |
|----------------------|------------------------|----------------|-----------------|----------------|-----------------|----------------|
| | 100% | | 75% | | 50% | |
| Electrical Stress | | | | | | |
| Operating Temp. [°C] | λ [FIT] | σ [FIT] | λ [FIT] | σ [FIT] | λ [FIT] | σ [FIT] |
| ≤ 30 | 1,19 | 0,28 | 0,65 | 0,15 | 0,36 | 0,08 |
| 35 | 1,52 | 0,35 | 0,84 | 0,19 | 0,46 | 0,11 |
| 40 | 1,94 | 0,45 | 1,06 | 0,25 | 0,58 | 0,14 |
| 45 | 2,45 | 0,57 | 1,34 | 0,31 | 0,74 | 0,17 |
| 50 | 3,07 | 0,71 | 1,68 | 0,39 | 0,92 | 0,22 |
| 55 | 3,82 | 0,89 | 2,10 | 0,49 | 1,15 | 0,27 |
| 60 | 4,72 | 1,10 | 2,59 | 0,60 | 1,42 | 0,33 |
| 65 | 5,80 | 1,35 | 3,19 | 0,74 | 1,75 | 0,41 |
| 70 | 7,09 | 1,65 | 3,89 | 0,91 | 2,14 | 0,50 |
| 75 | 8,61 | 2,01 | 4,73 | 1,10 | 2,59 | 0,60 |
| 80 | 10,40 | 2,42 | 5,71 | 1,33 | 3,13 | 0,73 |
| 85 | 12,50 | 2,91 | 6,86 | 1,60 | 3,76 | 0,88 |
| 90 | 14,94 | 3,48 | 8,20 | 1,91 | 4,50 | 1,05 |
| 95 | 17,78 | 4,14 | 9,76 | 2,27 | 5,35 | 1,25 |
| 100 | 21,05 | 4,90 | 11,55 | 2,69 | 6,34 | 1,48 |
| 105 | 24,82 | 5,78 | 13,62 | 3,17 | 7,47 | 1,74 |
| 110 | 29,13 | 6,78 | 15,99 | 3,72 | 8,77 | 2,04 |
| 115 | 34,05 | 7,93 | 18,69 | 4,35 | 10,26 | 2,39 |
| 120 | 39,65 | 9,23 | 21,76 | 5,07 | 11,94 | 2,78 |
| 125 | 45,99 | 10,71 | 25,24 | 5,88 | 13,85 | 3,23 |
| 130 | 53,15 | 12,38 | 29,17 | 6,79 | 16,01 | 3,73 |
| 135 | 61,20 | 14,25 | 33,59 | 7,82 | 18,43 | 4,29 |
| 140 | 70,24 | 16,36 | 38,55 | 8,98 | 21,15 | 4,93 |
| 145 | 80,34 | 18,71 | 44,09 | 10,27 | 24,20 | 5,64 |
| 150 | 91,60 | 21,33 | 50,27 | 11,71 | 27,59 | 6,43 |

Table 1: FIT values for SMD, Radial, Snap-In

Remark: Above values are only valid within the max. specified temperature range of the particular component. All given FIT data is meant for lifetime predictions only and is not representing any warranty.

For particular products (e.g. screw capacitors) within the datasheet, further FIT or MTBF data is added and in such a case, this substitutes the general information stated above.

| Mounting Type | Screw terminal | | | | | |
|----------------------|-----------------|----------------|-----------------|----------------|-----------------|----------------|
| | 100% | | 75% | | 50% | |
| Electrical Stress | | | | | | |
| Operating Temp. [°C] | λ [FIT] | σ [FIT] | λ [FIT] | σ [FIT] | λ [FIT] | σ [FIT] |
| ≤ 30 | 34,20 | 24,43 | 18,77 | 13,40 | 10,30 | 7,36 |
| 35 | 43,85 | 31,32 | 24,06 | 17,19 | 13,21 | 9,43 |
| 40 | 55,78 | 39,84 | 30,61 | 21,87 | 16,80 | 12,00 |
| 45 | 70,42 | 50,30 | 38,65 | 27,61 | 21,21 | 15,15 |
| 50 | 88,27 | 63,05 | 48,44 | 34,60 | 26,59 | 18,99 |
| 55 | 109,88 | 78,48 | 60,30 | 43,07 | 33,09 | 23,64 |
| 60 | 135,88 | 97,06 | 74,57 | 53,27 | 40,93 | 29,23 |
| 65 | 166,99 | 119,28 | 91,65 | 65,46 | 50,30 | 35,93 |
| 70 | 203,99 | 145,71 | 111,95 | 79,97 | 61,44 | 43,89 |
| 75 | 247,76 | 176,97 | 135,97 | 97,12 | 74,62 | 53,30 |
| 80 | 299,26 | 213,76 | 164,24 | 117,31 | 90,14 | 64,38 |
| 85 | 359,57 | 256,84 | 197,34 | 140,96 | 108,30 | 77,36 |
| 90 | 429,86 | 307,04 | 235,91 | 168,51 | 129,47 | 92,48 |
| 95 | 511,39 | 365,28 | 280,66 | 200,47 | 154,03 | 110,02 |
| 100 | 605,57 | 432,55 | 332,34 | 237,39 | 182,39 | 130,28 |
| 105 | 713,89 | 509,92 | 391,79 | 279,85 | 215,02 | 153,59 |

Table 2: FIT values for Screw types

λ - Mean Component Failure Rate

σ - Standard Deviation of Component Failure Rate

CALCULATION OF FIT VALUE FOR APPLICATION CASE

By using the given Telcordia SR-332 figures and by the assumption that the failure rate follows a gamma distribution, the FIT value can be calculated with given mean λ and standard deviation σ (see section tables in section 8.8) and desired UCL - Upper Confidence Level as follows:

$$\text{shape } \kappa = \left(\frac{\lambda}{\sigma} \right)^2$$

$$\text{scale } \theta = \frac{\sigma^2}{\lambda}$$

The desired FIT value for the application case is the P% quantile of the gamma distribution and it can be calculated by the inverse cumulative gamma distribution with the shape κ and scale θ parameters as follows:

$$\lambda_{P\%UCL} = G^{-1}(P/100; \kappa; \theta)$$

If the shape κ parameter is >100 the FIT can also be calculated by using the P% quantile of the normal distribution, by inverse cumulative distribution of normal distribution with mean λ and standard deviation σ :

$$\lambda_{P\%UCL} = N^{-1}(P/100; \lambda; \sigma)$$

Customer need to define which UCL is desired for the reliability prediction for their application case (typical values for UCL are e.g. 60%,90%, 95%, 99%).

CALCULATION EXAMPLE

Example 1:

GF Series – Radial type
Aluminum Electrolytic Capacitor

@ 70°C and 75% electrical stress
Upper Confidence Level (UCL) = 90%

Values according to table 1 at page 16:

$\lambda = 3.89$ FIT / $\sigma = 0.91$ FIT

$$\text{shape } \kappa = \left(\frac{3.89}{0.91} \right)^2 = 18.27$$

$$\text{scale } \theta = \frac{0.91^2}{3.89} = 0.21$$

$$\lambda_{90\%UCL} = G^{-1}(90/100; 18.27; 0.21) = 5.02 \text{ FIT}$$

In Microsoft Excel you can solve this with the following formula:

International / American Excel Version:
=GAMMAINV(0.9,18.27,0.21)

European Excel Version:
=GAMMAINV(0,9;18,27;0,21)

Example 2:

RG Series - Screw type
Aluminum Electrolytic Capacitor

@ 60°C and 75% electrical stress
Upper Confidence Level (UCL) = 90%

Values according to table 2 at page 16:

$\lambda = 74.57$ FIT / $\sigma = 53,27$ FIT

$$\text{shape } \kappa = \left(\frac{74.57}{53.27} \right)^2 = 2.01$$

$$\text{scale } \theta = \frac{0.91^2}{3.89} = 38.05 \text{ FIT}$$

$$\lambda_{90\%UCL} = G^{-1}(90/100; 2.01; 38.05) = 148.57 \text{ FIT}$$

In Microsoft Excel you can solve this with the following formula:

International / American Excel Version:
=GAMMAINV(0.9,2.01,38.05)

European Excel Version:
=GAMMAINV(0,9;2,01;38,05)

QUALITY MANAGEMENT SYSTEM

We are committed and living the principle of **QUALITY FIRST - to offer highly satisfying products and service to the customer**. This global aim is shared by the CapXon quality and environmental management system and part of our business philosophy:


QUALITY MANAGEMENT SYSTEM CERTIFICATION

In accordance with our quality commitment, CapXon quality management is certified by **ISO 9001** and **IATF 16949**. The certification covers our production plants as well as our sales organization. This standard is applied throughout the company and is used to implement, monitor and to proceed the CapXon quality policy in all process steps.

PRODUCT AND PROCESS QUALITY

Our product and process development follows the sequence and phases of **APQP – Advance Product Quality Planning**:

5 Phases of APQP

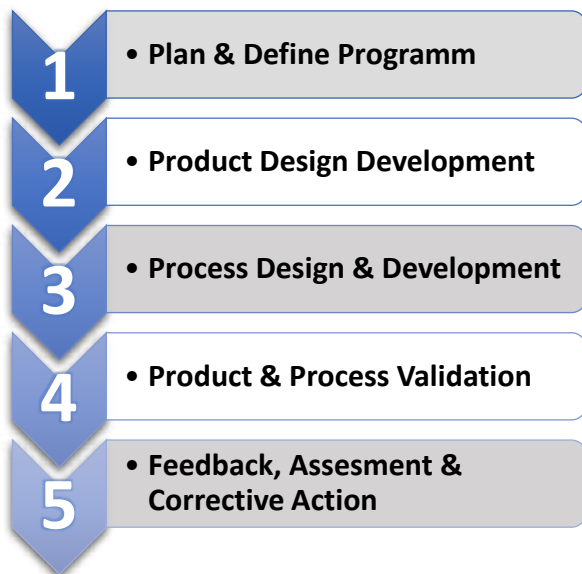

Quality tools such quality tools, including **5S, PDCA, FMEA, (DFMEA & PFMEA), MSA, APQP, PPAP, SPC** and others, are in place to minimize risks, provide constant monitoring and ensure continuous improvements in conjunction with regular internal audits and QM reviews.

QUALITY ASSURANCE

For our sample checks, we refer to **AQL - Acceptable Quality Level** figures, which are based on a random sampling

plan in accordance with **MIL-STD-1916**. Referring to instructions of this standard, a delivered lot will be accepted with a probability of 90%, if the percentage of non-conformance does not exceed the stated AQL figure. As a general internal target, the percentage of non-conformance in deliveries from CapXon is significantly below the AQL figure. The acceptance value we apply to non-conform components is $c=0$.

INCOMING GOODS INSPECTION BY CUSTOMER

We recommend applying planned random sampling checks in accordance with MIL-STD-1916, is compliant with MIL STD 105 D and IEC 60410, for incoming goods inspection. The test methods, which shall be applied, are laid down in the relevant standards.

ENVIRONMENTAL MANAGEMENT

Environmental Policy

CapXon defines internally the following environmental protection principles:

- comply with the given law & regulations
- observe and act to reduce pollution
- produce cleanly
- reduce the consumption and save resources
- cut down usage of toxic substances
- make continuous improvements
- protect the environment

ENVIRONMENTAL MANAGEMENT SYSTEM CERTIFICATION

CapXon environmental management system is certified in accordance with ISO 14001 and is applied throughout the whole company as well as CapXon's environmental policy is implemented.

ENVIRONMENTAL HAZARDOUS SUBSTANCES FREE MANAGEMENT SYSTEM

To show our commitment to protect the environment and people, CapXon drives a sustainable effort to produce environment-friendly products.

IECQ QC 080000 HSPM - Hazardous Substance Process Management, which is based on the quality management system of ISO 9001.

The CapXon QC080000 based HSF management system is company-wide applied for implementing the CapXon environmental Hazardous Substances management and that CapXon products effectively in the management of hazardous substances.

ENERGY MANAGEMENT SYSTEM

CapXon establishes comprehensive energy use management in accordance with the requirements of ISO 50001 Energy Management System in order to meet the social responsibility of low carbon environmental protection and efficiency

CERTIFICATION IN ACCORDANCE TO ISO 14001, ISO 50001, QC 080000

The CapXon Group operates an environmental management system that conforms to the requirements of **ISO 14001** and is mandatory for all plants. The CapXon Group operates an Energy management system that conforms to the requirements of **ISO 50001** and is mandatory for all plants. The CapXon Group operates an environmental **Hazardous Substances Free management system** that conforms to the requirements of QC 080000 and is mandatory for all plants. The company certificate is posted on the CapXon internet: (www.capxongroup.com).

RoHS COMPLIANCE

The abbreviation **RoHS** is usually called **Restriction of Hazardous Substances**, the full term is the short term for the **Directive on the restriction of the use of certain hazardous substances in electrical and electronic equipment** and is referring to the EU directive 2011/65/EU. The RoHS 2 – 2011/65/Eu substituted the former RoHS 1- 2002/95/EC.

The aim of RoHS is to banish Hazardous Substances of electronic waste, which can harm the environment and others. Based on this regulation, we as component manufacturer, need to design, observe and control that such hazardous materials are fully avoided and reduced to the max. Moreover, it's possible to replace them by adequate non concerned materials within the given limitations .

For all by RoHS scoped materials (excluding exempt products) the maximum permitted concentrations are:

all concerned materials (except Cd)

- 0,1% / 1000ppm

Cadmium -Cd:

- 0,01% or 100ppm

These limitations for the restricted materials focus on each homogeneous material within the product. So, the limitations are concerning each individual / single substance or part, which can be separated mechanically (e.g. aluminum can, rubber sealant) and are not apply to the weight of the whole component itself.

Last update of RoHS was Directive (EU) 2015/863, which was published on 2015-03-31 and implemented by 2019-07-22. According to this directive, the following ten substances are restricted:

- **Pb** - Lead
- **Hg**- Mercury
- **Cd** - Cadmium
- **Cr⁺⁶** - Hexavalent chromium
- **PBB** - Polybrominated biphenyls
- **PBDE** - Polybrominated diphenyl ether
- **DEHP** - Bis (2-ethylhexyl) phthalate
- **BBP** - Butyl benzyl phthalate
- **DBP** - Dibutyl phthalate
- **DIBP** - Diisobutyl phthalate

By the update DEHP, BBP, DBP and DIBP were added to the list of hazardous substances.

Since 2011 RoHS compliance is mandatory to be able to get CE approval.

C-RoHS / CHINA RoHS COMPLIANCE

The common speech so called China RoHS means the conformance to **SJ/T 11363-2006** for electrical components and assemblies and is fully called **Administrative Measure on the Control of Pollution Caused by Electronic Information Products**.

In China RoHS, the following substances are banned because they are considered as environmentally hazardous:

- **Pb** - Lead
- **Hg**- Mercury
- **Cd** - Cadmium
- **Cr⁺⁶** - Hexavalent chromium
- **PBB** - Polybrominated biphenyls
- **PBDE** - Polybrominated diphenyl ether

Since December 2012, CapXon has provided China RoHS certification for our products and certifications.

SONY GP CERTIFICATION

Since Nov 2011, CapXon has been certified as Green Partner by SONY and we are running an environmental management system that continuously meet the requirements of the SONY Green Partner Program and we are working in

accordance with the Sony environmental quality assurance. The Certificate is listed by **SONY GP Certificate No.: FC012746**

REACH CERTIFICATION

REACH is the abbreviation for Registration, Evaluation, Authorization of Chemicals and by Regulation (EC) No 1907 /2006 it is

So each manufacturer or importer, who is shipping goods to the European Union, need to declare and be compliant according to REACH, if within the shipped goods a substance, which is listed out SVHC-List (Substances of Very High Concern) is included and overall a total mass of bigger a ton per year is imported.

CapXon is working in accordance with REACH requirements and certification is available for our products.

ROHS & REACH MARKING

Within our datasheets, we mark the RoHS and REACH compliance with our "RoHS & REACH compliant"- marking, please see marking below for reference:



HALOGEN FREE (HF)

The Halogen Free requirements are based on customer and environmental regulations on management and control requirements of halogens, such as the **European Directive 2002/95/EC, IEC 61249-2-21, Montreal Protocol on Substances that Deplete the Ozone Layer and Controls the Stockholm joint pledge about durable organic pollutant.**

Concerned by the halogen-free initiative are elements like:

- **Fluorine**
- **Chlorine**
- **Bromine**
- **Iodine**
- **Astatine**

In case of fire, these elements can release toxic fumes, which could harm humans and can also cause corrosion of metals.

CapXon is using halogen-free materials for all our electrolytic capacitors. Since 31st of Oct 2009 all products meet the halogen-free requirements.

BANNED AND ENVIRONMENTAL HAZARDOUS SUBSTANCES IN COMPONENTS

As a manufacturer of passive components, we develop our products focussing on sustainability. In order to guarantee a standardized procedure within CapXon, a mandatory avoidance list of Environmental Hazardous Substances with special interest is part of our environmental management system. The planning and development instructions include regulations and guidelines that aim to identify environmental aspects and to optimize products as well as processes with respect to material usage and environmental compliance to design them with sparing use of resources and to substitute hazardous substances as far as possible.

The environmental officer provides support in the assessment of the environmental impacts of our development projects and as part of our environmental management these aspects are checked and recorded in internal design reviews.

AEC-Q200 & AUTOMOTIVE REQUIREMENTS

To serve the high standards of automotive applications, CapXon provides AEC-Q200 versions for many of their product series.

If AEC-Q200 version is available, the product series or single component is marked with the following marking on the datasheet:



Marking of components with references in reliability testing to AEC-Q200

The AEC-Q200 versions are different in case of reliability testing, production monitoring and available material declaration. For details, please see the table below:

| | Standard Version | AEC-Q200 Version |
|---|------------------|------------------|
| Reliability Testing | | |
| Tests according to internal specification | ✓ | ✓ |
| Tests according to AEC-Q200 applied test range related to product | ✗ | ✓ |
| Production Monitoring | | |
| Production & documentation in accordance with ISO 9001 | ✓ | ✓ |
| Production & documentation in accordance with IATF 16949 | ✗ | ✓ |
| Compliance and Declarations | | |
| RoHS & REACH compliance | ✓ | ✓ |
| IMDS entry available (on request) | ✗ | ✓ |
| PPAP (on request) | ✗ | ✓ |

Table 9: Differences between standard and AEC-Q200 components

AEC-Q200

The AEC-Q200 was issued as a global reliability test standard by the AEC - Automotive Electronics Council. The overall aim of this standard is to define the minimum stress test driven qualification requirements and references of test conditions for qualification of passive components.

AEC-Q200 qualified components are highly qualified products for critical surroundings and can withstand the harsh and challenging usage conditions of an automotive environment.

For Aluminum Electrolytic Capacitors, concerning all technologies of Liquid Aluminum Electrolytic, Solid and hybrid types, the AEC-Q200 claims a test plan of 27 different reliability tests (e.g.: Temperature Cycling, Vibration, Biased Humidity, Surge Voltage, ...) with a sample size of about 77 pcs. and a maximum test duration of particular test of about 1000 hours.

By AEC-Q200 at least the temperature range of -40°C to 105°C need to be tested and applicable for Aluminum Electrolytic Capacitors, if not, differently specified by datasheet.

In case of AEC-Q200 version, reliability testing is performed for the dedicated components in addition to CapXon's internal qualification setup as well as additional agreed requirements between CapXon and their customers.

PPAP

PPAP – Production Part Approval Process is a documentation to assure quality of supplier and their production process within the automotive supply chain.

The PPAP covers and ensure the following aspects:

- Manufacturability and meeting all given quality requirements
- Design records and specification requirements
- Manufacturing process can consistently meet all component requirements

For our AEC-Q200 components, we provide PPAP Level 3 on request, which is providing product samples as well as the complete supporting data.

IMDS

The IMDS – International Material Database System contains information about the used materials within the build-up of the component.


With IMDS, it is possible to monitor and control hazardous substances and prohibited substances down to the single component. IMDS is mainly used to fulfil various reporting requirements of automotive manufacturers.

For all our AEC-Q200 components and in case of an automotive use case, we provide IMDS entries on request. For further information, visit our website <http://www.capxongroup.com/en/> or contact CapXon directly.

LIFETIME ESTIMATION • LIFETIME COMPENDIUM

The accurate estimation of the lifetime of components is one of the elementary considerations of any electronic assembly. If electrolytic capacitors are not properly designed for the application environment and load, they will inevitably lead to a disproportionate change in their electrical performance or, in the worst case, failure of the capacitor. CapXon's lifetime compendium helps users to calculate and estimate the expected lifetime of **Aluminum Electrolytic Capacitors**.

The lifetime compendium is available to download from our website http://www.capxongroup.com/files/Lifetime%20Compendium_EN.pdf

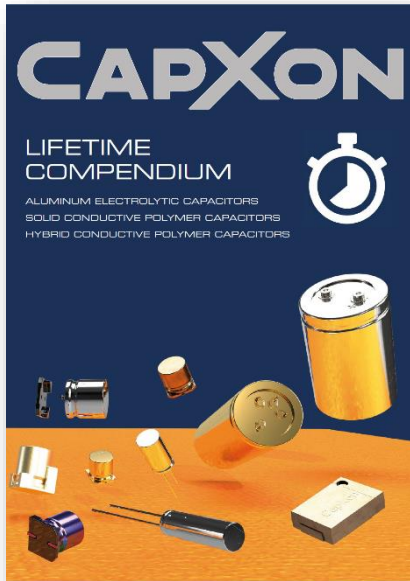

Content

| WORLD OF CAPXON | Page |
|---|------|
| GENERAL INFORMATION | 3 |
| About us | 3 |
| Technical Terms | 4 |
| LIFETIME COMPENDIUM | Page |
| HOW CAN THE TERM "LIFETIME" AND THE END OF IT BE SUBJECT TO AN E-CAP? | 5 |
| LOW VOLTAGE E-CAPS (≤ 100V) WITH LIQUID ELECTROLYTE | 6 |
| HIGH VOLTAGE E-CAPS (≥ 160V) WITH LIQUID ELECTROLYTES | 10 |
| TOTAL LIFETIME EXPERIENCE WITH CHANGING RIPPLE CURRENT IN THE APPLICATION | 11 |
| CALCULATION EXAMPLE - OUTPUT FILTER CAP - IN A SWITCH MODE POWER SUPPLY | 13 |
| CALCULATION STEPS | 14 |
| DETERMINATION OF USEFUL LIFE BY GRAPHIC WAY - LIFETIME NOMOGRAM - | 16 |
| APPLICATION EXAMPLES | 17 |
| SOLID CONDUCTIVE POLYMER CAPACITORS (SOLID TYPE E-CAPS) | 21 |
| HYBRID CONDUCTIVE POLYMER CAPACITORS | 24 |
| RULE OF THUMB FOR SIMPLE AND QUICK LIFETIME ESTIMATIONS | 26 |
| COMPONENT RELIABILITY DATA | 27 |
| FIT - FAILURES IN TIME | 27 |
| MTBF - MEANTIME BETWEEN FAILURES | 28 |
| LIFETIME TESTS | 28 |
| FIT & MTBF DATA OF CAPXON PRODUCTS | 30 |
| CALCULATION OF FIT VALUE FOR APPLICATION CASE | 32 |
| NOTES | 33 |

Technical Background

LIFETIME COMPENDIUM

structure of the component. To explain and calculate the additional heating, the relationship of the thermal resistance, or the ability of electronic components to dissipate heat.

Like all electronic components, electrolytic capacitors are not ideal components, but have issues that give off in the form of heat under load. For all electronic components, the cooler the component, the longer the expected lifetime.

For e-caps the ohmic losses are grouped under the term "ESR" for Equivalent Series Resistance. These include the ohmic losses resulting from the terminals of the capacitor, the contact connections of the terminals, the contact resistance of the electrode contacting and the dielectric losses, also referred to as a dissipation factor tan δ.

$$P_T = I_{RMS}^2 \cdot ESR$$

WITH
Internal power losses [W]
Ripple current flowing in the capacitor [A-RMS]
ESR Equivalent series resistance [Ω]

(3) $P_T = \frac{dW}{dt} = \Delta T_A \cdot \beta \cdot A$

WITH
 P_T Thermal power [W]
 ΔT_A Core temperature rise (°C) by internal heating due to the application current
 R_{th} Thermal resistance of the electrolytic capacitor [K/W]
 β Radiation coefficient [W/(cm²·K)]
 A Surface of the capacitor [cm²]

(4) $\Delta T_A = \frac{P_T \cdot R_{th}}{\beta \cdot A}$

DETERMINATION OF THE CORE TEMPERATURE INCREASE ΔT_A

To calculate the lifetime, the determination of ΔT_A , core temperature rise due to the application current in the capacitor - is necessary.

This can be done in different ways
a.) Temperature measurement of core temperature T_c

By this very precise method, a thermocouple (usually a K sensor) is inserted into the capacitor, which is possible only during the production of the e-cap and determines the core temperature T_c over time. The ambient temperature T_A is measured secondarily.

Fig. 2: Thermal output of the e-cap via convection, radiation and dissipation

If the thermal power P_T is now equal to the internal power losses P_{int} , the temperature increase caused by the alternating current flowing in the capacitor and in which heat generation and dissipation are in equilibrium can be determined.

Fig. 4: Snap-in capacitor with integrated thermocouple for measuring the core temperature

The integration of a temperature sensor is not that simple and only possible with electrolytic capacitors with some.

Calculation base

LIFETIME COMPENDIUM

For all CapXon high-performance series $\geq 200V$, see table 3

$$I_{RMS} = I_{avg} \cdot K_{ripple} \cdot K_{temp} = I_{avg} \cdot 2 \cdot \sqrt{\frac{f_{ripple}}{f_{ESR}}} \cdot 2 \cdot \sqrt{\frac{\Delta T_A}{T_A}}$$

WITH
Ripple current influence ΔT_A Core temperature rise (°C) by internal heating due to the application current
 ΔT_A Core temperature increase (°C) by internal heat, high due to the rated ripple current

Upper operation temperature T_A 85°C 105°C 115°C ≥ 120 °C
Thermal resistance R_{th} 30°C 2°C 10°C 5°C

Table 3: Maximum permissible core temperature rise due to the permissible rated alternating current

HIGH VOLTAGE E-CAPS (≥ 160V) WITH LIQUID ELECTROLYTES

Under the low voltage electrolytic capacitors are described in the previous chapter, in e-cap series with $\geq 160V$ another factor influencing the life-time is added: the operating voltage is applied to the electrolytic capacitor. It is known that the normal voltage of

the capacitor V_n the thermal stress on its dielectric decreases, which in turn leads to an extension of the service life. For all cases V_n between 80% to 100% of V_n , take for calculations $V_n \cdot 0,875$.

| K_{ripple} | K_{temp} | Type | Product | CapXon series |
|--------------|------------|----------------|---|---------------|
| 1 | 1 | Kadial | $V_n \cdot 0,875 \cdot 200V$ (PCV), $V_n \cdot 0,875 \cdot 250V$ (PCV), $V_n \cdot 0,875 \cdot 300V$ (PCV), $V_n \cdot 0,875 \cdot 350V$ (PCV), $V_n \cdot 0,875 \cdot 400V$ (PCV), $V_n \cdot 0,875 \cdot 450V$ (PCV), $V_n \cdot 0,875 \cdot 500V$ (PCV), $V_n \cdot 0,875 \cdot 550V$ (PCV), $V_n \cdot 0,875 \cdot 600V$ (PCV), $V_n \cdot 0,875 \cdot 650V$ (PCV), $V_n \cdot 0,875 \cdot 700V$ (PCV), $V_n \cdot 0,875 \cdot 750V$ (PCV), $V_n \cdot 0,875 \cdot 800V$ (PCV), $V_n \cdot 0,875 \cdot 850V$ (PCV), $V_n \cdot 0,875 \cdot 900V$ (PCV), $V_n \cdot 0,875 \cdot 950V$ (PCV), $V_n \cdot 0,875 \cdot 1000V$ (PCV), $V_n \cdot 0,875 \cdot 1050V$ (PCV), $V_n \cdot 0,875 \cdot 1100V$ (PCV), $V_n \cdot 0,875 \cdot 1150V$ (PCV), $V_n \cdot 0,875 \cdot 1200V$ (PCV), $V_n \cdot 0,875 \cdot 1250V$ (PCV), $V_n \cdot 0,875 \cdot 1300V$ (PCV), $V_n \cdot 0,875 \cdot 1350V$ (PCV), $V_n \cdot 0,875 \cdot 1400V$ (PCV), $V_n \cdot 0,875 \cdot 1450V$ (PCV), $V_n \cdot 0,875 \cdot 1500V$ (PCV), $V_n \cdot 0,875 \cdot 1550V$ (PCV), $V_n \cdot 0,875 \cdot 1600V$ (PCV), $V_n \cdot 0,875 \cdot 1650V$ (PCV), $V_n \cdot 0,875 \cdot 1700V$ (PCV), $V_n \cdot 0,875 \cdot 1750V$ (PCV), $V_n \cdot 0,875 \cdot 1800V$ (PCV), $V_n \cdot 0,875 \cdot 1850V$ (PCV), $V_n \cdot 0,875 \cdot 1900V$ (PCV), $V_n \cdot 0,875 \cdot 1950V$ (PCV), $V_n \cdot 0,875 \cdot 2000V$ (PCV) | PCV series |
| 1 | 1 | Snap-in | $V_n \cdot 0,875 \cdot 200V$ (PCV), $V_n \cdot 0,875 \cdot 250V$ (PCV), $V_n \cdot 0,875 \cdot 300V$ (PCV), $V_n \cdot 0,875 \cdot 350V$ (PCV), $V_n \cdot 0,875 \cdot 400V$ (PCV), $V_n \cdot 0,875 \cdot 450V$ (PCV), $V_n \cdot 0,875 \cdot 500V$ (PCV), $V_n \cdot 0,875 \cdot 550V$ (PCV), $V_n \cdot 0,875 \cdot 600V$ (PCV), $V_n \cdot 0,875 \cdot 650V$ (PCV), $V_n \cdot 0,875 \cdot 700V$ (PCV), $V_n \cdot 0,875 \cdot 750V$ (PCV), $V_n \cdot 0,875 \cdot 800V$ (PCV), $V_n \cdot 0,875 \cdot 850V$ (PCV), $V_n \cdot 0,875 \cdot 900V$ (PCV), $V_n \cdot 0,875 \cdot 950V$ (PCV), $V_n \cdot 0,875 \cdot 1000V$ (PCV), $V_n \cdot 0,875 \cdot 1050V$ (PCV), $V_n \cdot 0,875 \cdot 1100V$ (PCV), $V_n \cdot 0,875 \cdot 1150V$ (PCV), $V_n \cdot 0,875 \cdot 1200V$ (PCV), $V_n \cdot 0,875 \cdot 1250V$ (PCV), $V_n \cdot 0,875 \cdot 1300V$ (PCV), $V_n \cdot 0,875 \cdot 1350V$ (PCV), $V_n \cdot 0,875 \cdot 1400V$ (PCV), $V_n \cdot 0,875 \cdot 1450V$ (PCV), $V_n \cdot 0,875 \cdot 1500V$ (PCV), $V_n \cdot 0,875 \cdot 1550V$ (PCV), $V_n \cdot 0,875 \cdot 1600V$ (PCV), $V_n \cdot 0,875 \cdot 1650V$ (PCV), $V_n \cdot 0,875 \cdot 1700V$ (PCV), $V_n \cdot 0,875 \cdot 1750V$ (PCV), $V_n \cdot 0,875 \cdot 1800V$ (PCV), $V_n \cdot 0,875 \cdot 1850V$ (PCV), $V_n \cdot 0,875 \cdot 1900V$ (PCV), $V_n \cdot 0,875 \cdot 1950V$ (PCV), $V_n \cdot 0,875 \cdot 2000V$ (PCV) | PCV series |
| 1 | 1 | Scrap terminal | $V_n \cdot 0,875 \cdot 200V$ (PCV), $V_n \cdot 0,875 \cdot 250V$ (PCV), $V_n \cdot 0,875 \cdot 300V$ (PCV), $V_n \cdot 0,875 \cdot 350V$ (PCV), $V_n \cdot 0,875 \cdot 400V$ (PCV), $V_n \cdot 0,875 \cdot 450V$ (PCV), $V_n \cdot 0,875 \cdot 500V$ (PCV), $V_n \cdot 0,875 \cdot 550V$ (PCV), $V_n \cdot 0,875 \cdot 600V$ (PCV), $V_n \cdot 0,875 \cdot 650V$ (PCV), $V_n \cdot 0,875 \cdot 700V$ (PCV), $V_n \cdot 0,875 \cdot 750V$ (PCV), $V_n \cdot 0,875 \cdot 800V$ (PCV), $V_n \cdot 0,875 \cdot 850V$ (PCV), $V_n \cdot 0,875 \cdot 900V$ (PCV), $V_n \cdot 0,875 \cdot 950V$ (PCV), $V_n \cdot 0,875 \cdot 1000V$ (PCV), $V_n \cdot 0,875 \cdot 1050V$ (PCV), $V_n \cdot 0,875 \cdot 1100V$ (PCV), $V_n \cdot 0,875 \cdot 1150V$ (PCV), $V_n \cdot 0,875 \cdot 1200V$ (PCV), $V_n \cdot 0,875 \cdot 1250V$ (PCV), $V_n \cdot 0,875 \cdot 1300V$ (PCV), $V_n \cdot 0,875 \cdot 1350V$ (PCV), $V_n \cdot 0,875 \cdot 1400V$ (PCV), $V_n \cdot 0,875 \cdot 1450V$ (PCV), $V_n \cdot 0,875 \cdot 1500V$ (PCV), $V_n \cdot 0,875 \cdot 1550V$ (PCV), $V_n \cdot 0,875 \cdot 1600V$ (PCV), $V_n \cdot 0,875 \cdot 1650V$ (PCV), $V_n \cdot 0,875 \cdot 1700V$ (PCV), $V_n \cdot 0,875 \cdot 1750V$ (PCV), $V_n \cdot 0,875 \cdot 1800V$ (PCV), $V_n \cdot 0,875 \cdot 1850V$ (PCV), $V_n \cdot 0,875 \cdot 1900V$ (PCV), $V_n \cdot 0,875 \cdot 1950V$ (PCV), $V_n \cdot 0,875 \cdot 2000V$ (PCV) | PCV series |

Table 2: Influence of the application current and the application voltage on CapXon high-voltage series

| K_{ripple} | K_{temp} | Type | Product | CapXon series |
|--------------|------------|--------|---|---------------|
| 1 | 1 | Kadial | $V_n \cdot 0,875 \cdot 200V$ (PCV), $V_n \cdot 0,875 \cdot 250V$ (PCV), $V_n \cdot 0,875 \cdot 300V$ (PCV), $V_n \cdot 0,875 \cdot 350V$ (PCV), $V_n \cdot 0,875 \cdot 400V$ (PCV), $V_n \cdot 0,875 \cdot 450V$ (PCV), $V_n \cdot 0,875 \cdot 500V$ (PCV), $V_n \cdot 0,875 \cdot 550V$ (PCV), $V_n \cdot 0,875 \cdot 600V$ (PCV), $V_n \cdot 0,875 \cdot 650V$ (PCV), $V_n \cdot 0,875 \cdot 700V$ (PCV), $V_n \cdot 0,875 \cdot 750V$ (PCV), $V_n \cdot 0,875 \cdot 800V$ (PCV), $V_n \cdot 0,875 \cdot 850V$ (PCV), $V_n \cdot 0,875 \cdot 900V$ (PCV), $V_n \cdot 0,875 \cdot 950V$ (PCV), $V_n \cdot 0,875 \cdot 1000V$ (PCV), $V_n \cdot 0,875 \cdot 1050V$ (PCV), $V_n \cdot 0,875 \cdot 1100V$ (PCV), $V_n \cdot 0,875 \cdot 1150V$ (PCV), $V_n \cdot 0,875 \cdot 1200V$ (PCV), $V_n \cdot 0,875 \cdot 1250V$ (PCV), $V_n \cdot 0,875 \cdot 1300V$ (PCV), $V_n \cdot 0,875 \cdot 1350V$ (PCV), $V_n \cdot 0,875 \cdot 1400V$ (PCV), $V_n \cdot 0,875 \cdot 1450V$ (PCV), $V_n \cdot 0,875 \cdot 1500V$ (PCV), $V_n \cdot 0,875 \cdot 1550V$ (PCV), $V_n \cdot 0,875 \cdot 1600V$ (PCV), $V_n \cdot 0,875 \cdot 1650V$ (PCV), $V_n \cdot 0,875 \cdot 1700V$ (PCV), $V_n \cdot 0,875 \cdot 1750V$ (PCV), $V_n \cdot 0,875 \cdot 1800V$ (PCV), $V_n \cdot 0,875 \cdot 1850V$ (PCV), $V_n \cdot 0,875 \cdot 1900V$ (PCV), $V_n \cdot 0,875 \cdot 1950V$ (PCV), $V_n \cdot 0,875 \cdot 2000V$ (PCV) | PCV series |

Table 3: Influence of the application current and application voltage on CapXon high voltage series for use in lightning application

Application example

LIFETIME COMPENDIUM

CALCULATION EXAMPLE - OUTPUT FILTER CAP - IN A SWITCH MODE POWER SUPPLY

Fig. 2: Principal diagram for switching mode power supply with active PFC and galvanically isolated output

Output voltage: 24V
Rated power: 30Watt = 97,000W
Operating cycles: 200,000 during the operating period of 10 years

Operation under different conditions according to the following table:

| Operation in Mode 1 | Operation in Mode 2 | Stand / Sleep |
|--|--|--|
| Duration $t_{sw} = 300 \mu s$ | Duration $t_{sw} = 180 \mu s$ | Duration $t_{sw} = 300 \mu s$ |
| Ambient temperature $T_A = 70^\circ C$ | Ambient temperature $T_A = 70^\circ C$ | Ambient temperature $T_A = 45^\circ C$ |

| Frequency f (RMS) | Frequency f (RMS) | Frequency f (RMS) |
|-------------------|-------------------|-------------------|
| 180Hz | 5,5A | 300Hz |
| 300Hz | 2A | 600Hz |
| 1700Hz | 0,5A | 12000Hz |
| 3000Hz | 0,5A | 3000Hz |

Table 16: Requirement profile for the calculation example - switched-mode power supply

Selected Type: **GF561M035G250ETA**

| Rated capacitance C _r | Rated voltage V _r | Rated current I _r | Dimension $\phi \times L$ | Endurance |
|----------------------------------|------------------------------|------------------------------|---------------------------|----------------|
| 500µF | 35V | 3,06A at 100kHz/105°C | 30mm x 25mm | 5000h at 100°C |

Table 17: Main parameter GF561M035G250ETA

Graphical estimation

LIFETIME COMPENDIUM

The first step is to calculate the equivalent ripple current I_{RMS} and ΔT_A as well as the resulting RMS value I_{RMS}

WITH
 $I_{RMS} = I_{avg} \cdot K_{ripple} \cdot K_{temp}$

$$I_{RMS} = I_{avg} \cdot 2 \cdot \sqrt{\frac{f_{ripple}}{f_{ESR}}} \cdot 2 \cdot \sqrt{\frac{\Delta T_A}{T_A}}$$

The necessary ripple current correction factors are shown in table 3. Extract data sheet 001 series

| Frequency [Hz] | 50 [Hz] | 120 | 300 | 1k | 2,5k |
|---|---------|-----|-----|-----|------|
| Ripple current correction factor K_{ripple} | 0,8 | 1,0 | 1,2 | 1,5 | 1,4 |

Table 20: Ripple current correction factor for the CapXon series

Eqn.: 120Hz current: $I_{RMS} = 20A$
Eqn.: 120Hz current: $I_{RMS} = 11,4A$

RMS value: $I_{RMS} = \sqrt{20^2 + 11,4^2} = 23,4A$

In the second step, the ripple current ratio I_{RMS} can be calculated with

Ripple current ratio: $\frac{I_{RMS}}{I_r} = \frac{23,4A}{3,06A} = 7,66$

Fig. 3: Nomogram for the CapXon series with intersection point for the application example

The ripple current ratio and the ambient temperature of 60°C show intersection of the graph in the nomogram. The useful life is between the 50,000h and 100,000h curve, exactly at 60,000h and meets the minimum requirement of > 40,000h.

TECHNICAL NOTES • TECHNICAL COMPENDIUM

Due to their compact design, **Aluminum Electrolytic Capacitors** are the most common high-capacitance storage and filter elements in electronics. Like all electronic components, they do not have an “ideal” electrical behavior, they have losses. Their properties are very dependent on temperature and frequency. Detailed knowledge of these components is an absolute must for all electronics developers, especially for power supplies and converters.

The CapXon Technical Compendium describes the basics, electrical parameters, production steps, provides suggestions for the selection of suitable capacitors and design rules for reliable and long-lasting operation.

The technical compendium is available to download from our website http://www.capxongroup.com/files/Technical%20Compendium_EN.pdf



Basics

TECHNICAL INFORMATION

1. BASICS

Aluminum Electrolytic Capacitors are by far the most important and common high-capacitance storage or filter capacitors in electronic devices.

The enormous importance of electrolytic capacitors is related to their properties:

- Extremely high CV (capacitance per volume) values on the smallest volume
- High dielectric strength of even the thinnest layers (2 to a 10⁷ V/cm)
- Relatively high dielectric constant ε (expansion of regions A)
- Etching ability of aluminum, which allows a surface enlargement of up to 200 times and thus a dramatic space reduction
- Very wide range of design and dimensions

1.1. BASIC STRUCTURE OF A CAPACITOR

When voltage is applied between both conducting electrode plates, a certain amount of charge Q will be stored in the dielectric surface by a proportional relative voltage. The proportional constant C is designating the ability of the capacitor to store energy in electric field.

The capacitance can be calculated using the amount of charge and the applied voltage

$$C = \frac{Q}{U}$$

Fig. 1: Basic structure of a plate capacitor

Fig. 2: Sectional view of an aluminum electrolytic capacitor

WITH

- C Capacitance [F]
- Q Charge [C]
- U Applied voltage [V]

$$C = \epsilon_0 \cdot \epsilon_r \cdot \frac{A}{d}$$

WITH

- ε₀ Absolutely Permittivity (8.85 · 10⁻¹² F/m)
- ε_r Relative Permittivity [F/m] – depending on used dielectric material
- A Surface of capacitor electrode [m²]
- d Distance between the capacitor plates [m]

1.2. CONSTRUCTION OF ALUMINUM ELECTROLYTIC CAPACITORS

All Aluminum Electrolytic Capacitors are based on the knowledge that an oxide layer, which is electrochemically produced on aluminum, allows current to pass in one direction and blocks the current in the other direction, like the principle of a semiconductor diode. Even very thin layers enable very high dielectric strength. The oxide layer thus forms the dielectric of the capacitor.

The oxide layer has a porous structure, even before it is processed in order to achieve an optimal electrical connection of this rough surface, a conductive liquid, the electrolyte, is used. The liquid penetrates the pores and wets the coarse layer. The electrolyte is in turn contacted electrically via a second aluminum foil (current supply foil).

Fig. 3: Production steps - from foil to capacitor

Production steps: Raw material Aluminum foil, Foil etching, Foil forming, Cutting, Contacting and winding, Impregnation, Assembling, Rubber sealing (uvf), Sleeve and marking, Aging, Finishing and packaging.

Production steps

TECHNICAL INFORMATION

2. PRODUCTION STEPS

To achieve the highest level of reliability for all our products, CapXon only uses 99.99% pure aluminum in its electrolytic capacitors. Foreign atoms on the surface in connection with the electrolyte would lead to corrosion.

Raw material Aluminum foil

Foil etching

The surface of the aluminum foil is enlarged by 50 to 200 times by etching. At CapXon, this is done in its own factory using appropriate continuous baths. The etching process, especially of high-quality high-voltage foil, requires enormous know-how and decades of experience. The electrolyte thin foil (20 – 100µm) have to be mechanically stable enough to survive the further manufacturing steps like multiple etching, washing, drying, chemical rinsing without damage. Only a high understanding of the complex processing of etched aluminum foils are the guarantee for an aluminum electrolytic capacitor of the highest quality!

Foiling

The oxide layer required as a dielectric is produced electrochemically on the anode foil after the roughening process (etching) by immersing the foil in a bath with boric acid or similar chemical and applying voltage during the process. The process is called foiling. Over time, the layer thickness increases, while the current decreases and the voltage on the oxide layer increases. At first very strongly then increasingly a maximum value. Depending on the bath composition, rated voltages of 650V or higher can be achieved.

Fig. 4: Direct link between foiling voltage, oxide layer thickness and specific capacitance

Fig. 5: Production steps - from foil to capacitor

The processing of the foils, the so-called etching process, the forming and the subsequent manufacture of the electrolytic capacitor and specific capacitance, the capacitance is inversely proportional to the foiling voltage.

Electrical parameters

TECHNICAL INFORMATION

Apart from the ultra low ESR already explained, what are the main advantages of conductive polymer capacitors?

| Technology | Solid Conductive Polymer | Hybrid Conductive Polymer |
|------------------|--------------------------|---------------------------|
| Capacitance | 4.7 - 3000µF | 1.2 - 1500µF |
| Rated voltage | 2.5 - 300VDC | 16 - 400VDC |
| Max. temperature | 100 - 125°C | 100 - 150°C |
| ESR | 7 - 120mΩ | 11 - 200mΩ |

Table 1: Allow ranges of solid conductive and hybrid polymer capacitors

4.3. STABILITY OF ELECTRICAL PARAMETERS

If we compare the solid polymer or hybrid polymer technology with other capacitors designs, the advantage becomes clear.

The capacitance of ceramic capacitors reduces for high-capacitance types with the applied voltage, the advantage becomes clear.

Ceramic materials like X7R, X7E, Y4T or Z5U are ferroelectric materials and classified as class 2 ceramics. As higher the applied voltage is lower the permittivity, i.e. lower the capacitance value. The capacitance measured as applied at higher voltage may drop to 50% of the value measured with the standardized measurement voltage of 5.0 or 2.0V, what that means for the circuit in filters or memory applications need not be further elaborated here. This is the reason for harmonic distortions in audio applications.

Fig. 23: Change in capacitance as a function of the applied voltage for an MLCC and a polymer capacitor

Table 20: Recommended capacitor series for output smoothing

4.4. EXTREMELY LONG LIFE

In order to achieve a high capacity in the smallest space at the same time, acceptable costs remained so far only the way to use aluminum capacitors with liquid electrolyte.

Apart from the temperature and frequency-related disadvantages, the lifetime of these capacitors must always be considered.

The use of a liquid electrolyte results in changes in electrical properties over time.

As a result, an aluminum electrolytic capacitor slowly but constantly loses electrolyte during the time - the component is driving out. The lower the temperature of the capacitor, the slower the desiccation process, hence a longer life.

Capacitor selection

TECHNICAL INFORMATION

6.2. HIGH FREQUENCY OUTPUT SMOOTHING

In the output stage on the secondary side, a rectification and smoothing circuit converts the AC voltage supplied by the full-bridge MOSFET into the desired DC voltage. For example, 2.2VDC. The smoothing circuit can consist of capacitors or the combination of capacitor and inductor. See Fig. 19. The output current smooth ripples in the rectified voltage and also ensure the stability during transient increase in the load current.

Fig. 27: Output smoothing capacitors in a Flyback SMPS

When the MOSFET is not turned on, no current flows through the secondary diode and the output capacitors must supply the load with power. When the MOSFET is turned off, the diode conducts, supplies the load and charges the output capacitor too.

Table 20: Recommended capacitor series for output smoothing

6.3. BUFFERING

The block diagram in Fig. 30 shows a microcontroller (µC) that is supplied by a linear voltage regulator, whose output voltage is 5V. In the application we assume a standby mode (liberation with minimal power consumption) and an operating mode of the µC. As standby current (I_{standby}) and an operating current between 50mA and 500mA are necessary for the µC. The threshold value between standby and operating current is therefore 50mA, which leads to a standby current requirement of the µC of up to rise times of 1000ms on the linear regulator.

Fig. 30: Standby of power supply circuit

These rise times are too fast for the connected voltage regulator, so that the control loop does not yet react and there is a voltage drop at the input of the µC. The result would be an unstable operation of the µC, misoperation of binary values or, in the worst case, a system crash.

Design rules

TECHNICAL INFORMATION

7. DESIGN RULES

7.1. ARRANGEMENT

Never arrange electrolytic capacitors near hot components such as heat sinks, transformers, power semiconductors etc. to avoid thermal heating of the liquid electrolyte.

7.3. CLEARANCE / OVERPRESSURE VENT

During operation, current flows through the capacitor and the diode bridge, connected to ESR, create conduction in the form of heat.

The hydrogen released inside the electrolytic capacitor increases the internal pressure. If the internal pressure is too high, the overpressure vent opens and the gas escapes in a controlled manner.

In order not to impair the functioning of the vent, a minimum distance to other components must be maintained above.

No conducting tracks, wires or other circuit parts may be arranged above the valve.

Fig. 36: Recommended distance for optimal cooling

If possible, leave the half diameter between the electrolytic capacitors for optimal cooling of the heat-sensitive component.

7.2. CONDUCTOR TRACKS


Make conductor tracks sufficiently thick. Especially at high IFRMS currents the track can be very hot. If the proximity effect is ignored, large widths at 25µm doesn't help! Provide 100µm, 200µm thickness or more.

Table 31: Recommended track thickness for high-IFRMS current

Table 32: Recommended minimum clearance distance between topology capacitor and device case

SWITCH MODE POWER SUPPLY (SMPS)


Example of a Switch Mode Power Supply with boost Power Factor Correction (PFC) and downstream DC/DC converter in Fly-back topology with recommended products.

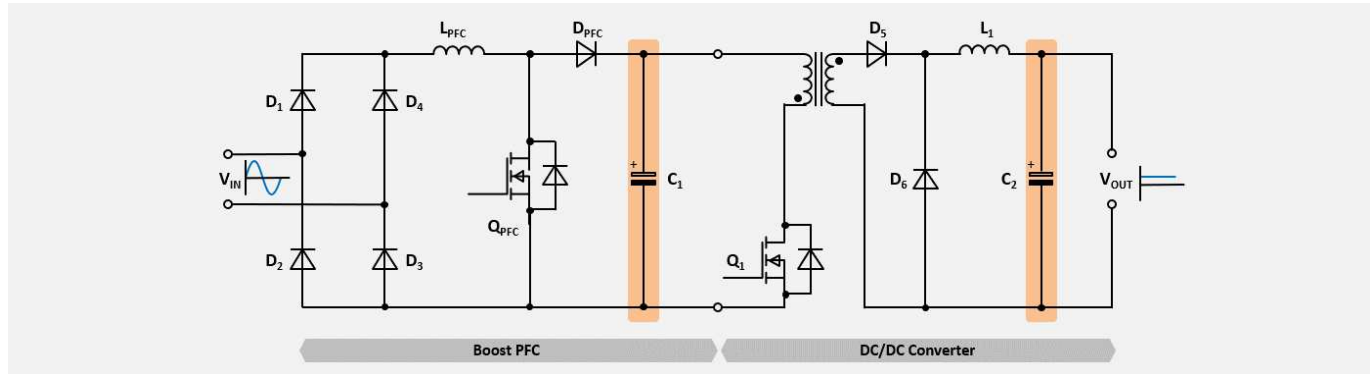

| Designation | Circuit | Purpose | Specification | Series | Part Number |
|----------------|-----------------|-----------------------------------|---|--------|----------------|
| C ₁ | Boost PFC | Inductor ripple current filtering | 100µF; 400V; 105°C; Radial; 2000h D18xL31.5mm; 0.53A@120Hz | KM | KM101M400K315A |
| C ₁ | Boost PFC | Inductor ripple current filtering | 470µF; 450V; 105°C; Snap-In ; 5000h D35xL45mm; 1.94A@120Hz | HP | HP471M450P450A |
| C ₂ | DC/DC Converter | Output filtering | 470µF; 25V; 105°C; SMD; 2000h D10xL10.5mm; 0.65A@100kHz | DV | DV471M025G105A |
| C ₂ | DC/DC Converter | Output filtering | 1000µF; 25V; 105°C; Radial; 10000h D13xL20mm; 1.91A@100kHz | FH | FH102M025I200A |
| C ₂ | DC/DC Converter | Output filtering | 82µF; 25V; 105°C; Radial; 2000h D8xL11.5mm; 4.1A@100kHz | PS | PS820M025F115A |

INDUSTRIAL MOTOR DRIVE


Example of a typical industrial motor drive for pumps, fans or compressors. The power circuit consist input rectifier, Power Factor Correction (PFC), DC link bank and 3-phase IGBT power stage. CapXon offers the full range of DC link solutions in electrolyte technology

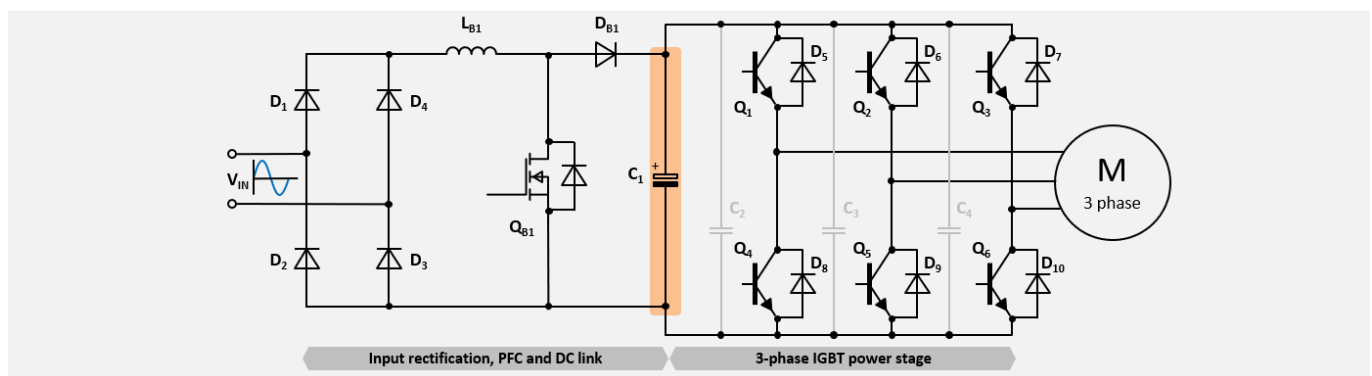

| Designation | Circuit | Purpose | Specification | Series | Part Number |
|----------------|--------------|---------------------------|--|--------|----------------|
| C ₁ | DC link bank | Energy storage and supply | 560µF; 450V; 85°C; Snap-In; 7000h D30xL50mm; 3.17A@120Hz | UC | UC561M450O500A |
| C ₁ | DC link bank | Energy storage and supply | 470µF; 500V; 85°C; Snap-In; 10000h D35xL55mm; 2.99A@120Hz | UD | UD471M500P550A |
| C ₁ | DC link bank | Energy storage and supply | 680µF; 450V; 105°C; Snap-In; 8000h D35xL60mm; 2.94A@120Hz | UK | UK681M450P600A |
| C ₁ | DC link bank | Energy storage and supply | 680µF; 450V; 105°C; Snap-In; 10000h D35xL55mm; 3A@120Hz | UL | UL821M450Q550A |

PHOTO VOLTAIC INVERTER


Block diagram of the power circuit of a photo voltaic inverter with EMC filter, monitoring circuit, step-up converter, bridge circuit, and mains relay with recommended products.

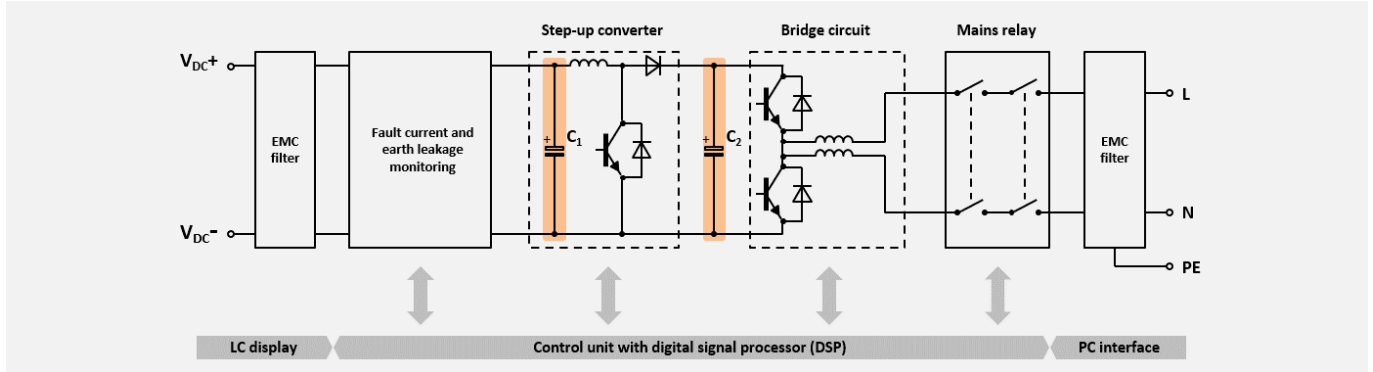

| Designation | Circuit | Purpose | Specification | Series | Part Number |
|---------------------------------|-------------------|---------------------------|--|--------|----------------|
| C ₁ , C ₂ | Step-up + DC link | Energy storage and supply | 680µF; 500V; 105°C; Snap-In; 5000h D40xL60mm; 3A@120Hz | UJ | UJ681M500Q600A |
| C ₁ , C ₂ | Step-up + DC link | Energy storage and supply | 5600µF; 450V; 105°C; Screw; 20000h D63.5xL165mm; 21.7@120Hz | RX | RX562M450SA65A |
| C ₁ , C ₂ | Step-up + DC link | Energy storage and supply | 470µF; 450V; 105°C; Snap-In; 10000h D30xL50mm; 1.97A@120Hz | UL | UL471M450O500A |
| C ₁ , C ₂ | Step-up + DC link | Energy storage and supply | 1000µF; 450V; 105°C; Screw; 8000h D51xL80mm; 4.6A@120Hz | RH | RH102M350R800A |

3-PHASE HIGH VOLTAGE BATTERY CHARGER


Principal circuit of a 3-phase high voltage battery charger for bidirectional applications such as electric vehicle charging (e-cars, fork-lift trucks, transport vehicles with recommend products for the active rectifier and output filter.

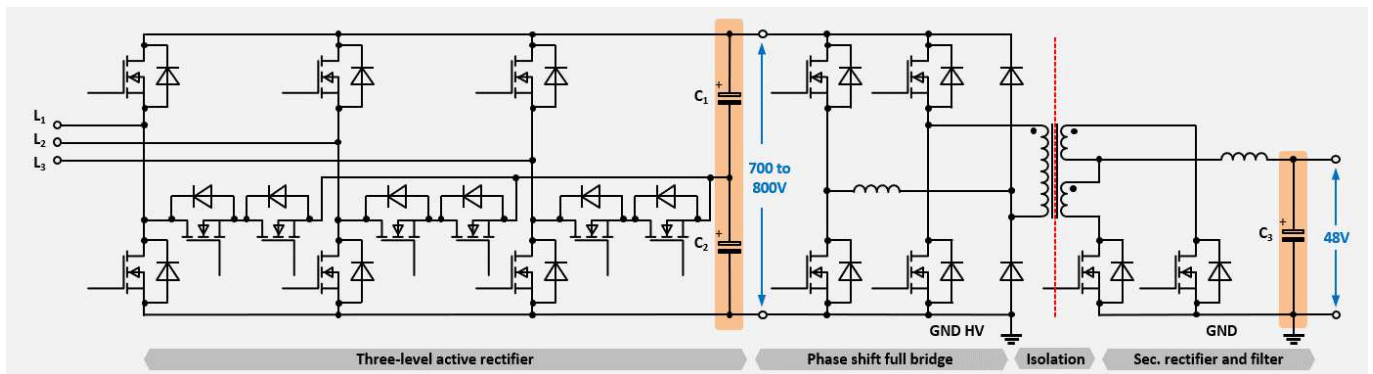

| Designation | Circuit | Purpose | Specification | Series | Part Number |
|---------------------------------|------------------------------|---------------------------------------|---|--------|------------------|
| C ₁ , C ₂ | Three-level active rectifier | Energy storage and supply | 2200µF; 450V; 85°C; Snap-In; 7000h D45xL90mm; 8.5A@120Hz | UC | UC222M450V900A |
| C ₁ , C ₂ | Three-level active rectifier | Energy storage and supply | 1000µF; 500V; 105°C; Snap-In; 5000h D40xL80mm; 4.68A@120Hz | UJ | UJ102M500Q800A |
| C ₃ | Output filter | Output buffering and ensure stability | 56µF; 63V; 105°C; Radial; 10000h D10xL12.5mm; 2.4A@100kHz | AS | AS560M063G125PTA |
| C ₃ | Output filter | Output buffering and ensure stability | 150µF; 63V; 105°C; Radial; 2000h D10xL18mm; 3A@100kHz | PH | PH151M063G125PTA |

27W PORTABLE POWER USB-C ADAPTER


Example of a portable power adapter for USB-C laptops, smartphones and tablets with recommend products for the LC filter and to ensure stability (smoothing) during transient increase in the load voltage.

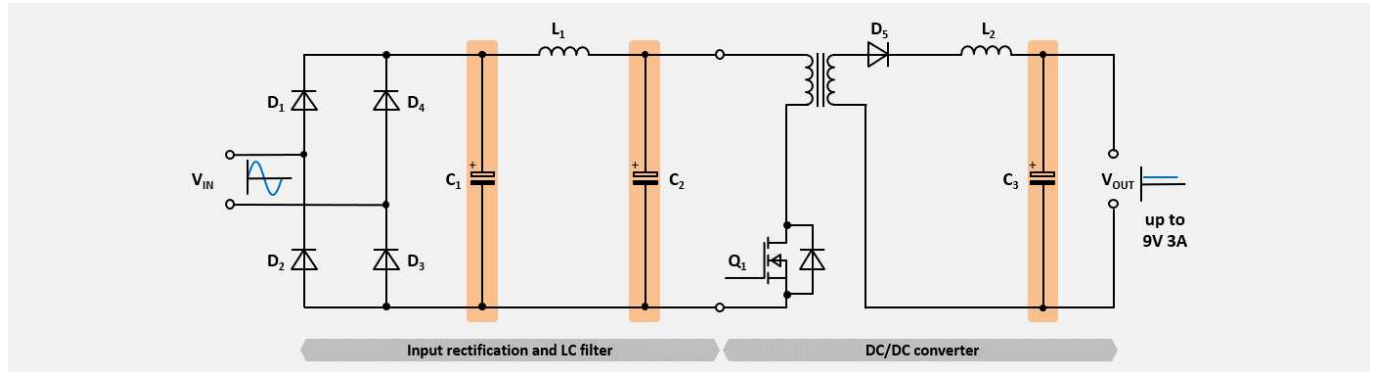

| Designation | Circuit | Purpose | Specification | Series | Part Number |
|---------------------------------|-----------------|------------------|--|--------|----------------|
| C ₁ , C ₂ | LC filter | Input filtering | 22μF; 400V; 105°C; Radial; 2000h D10xL25mm; 0.125A@120Hz | KM | KM220M400G250A |
| C ₁ , C ₂ | LC filter | Input filtering | 15μF; 400V; 105°C; Radial; 5000h D10xL20mm; 0.24A@120Hz | KF | KF150M400G200A |
| C ₃ | DC/DC converter | Output filtering | 470μF; 16V; 105°C; Radial; 2000h D5.5xL11mm; 2.69A@100kHz | PX | PX471M016C090P |
| C ₃ | DC/DC converter | Output filtering | 330μF; 12V; 105°C; Radial; 2000h D5xL9mm; 2.69A@100kHz | PX | PX331M012C090P |

AUDIO SPEAKER

Example of an active audio speaker with treble and bass and the recommend products for the NF filter as well as the acoustic coupling.

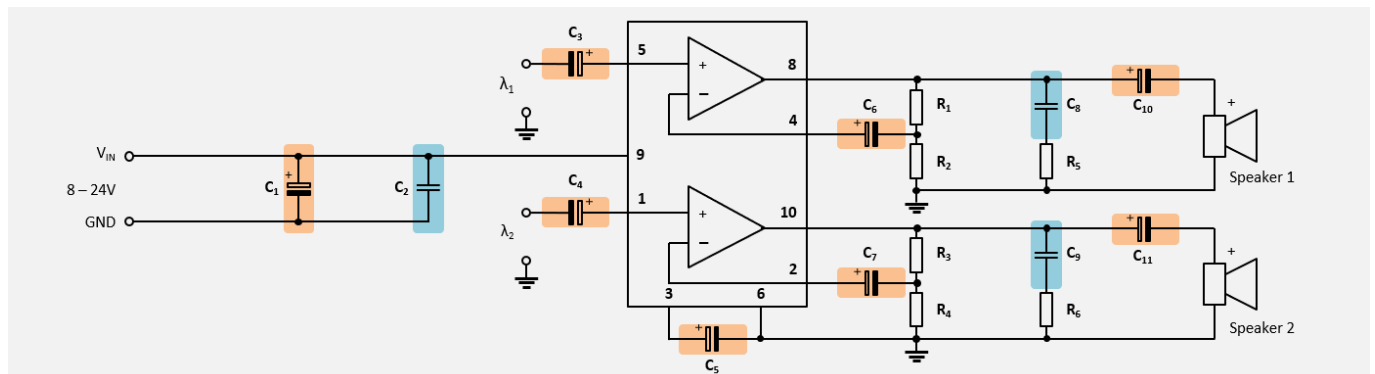

| Designation | Circuit | Purpose | Specification | Series | Part Number |
|--|---------------|-------------------|--|--------|------------------|
| C ₁ , C ₃ , C ₄ , C ₅ C ₆ , C ₇ , C ₁₀ , C ₁₁ | Audio speaker | NF filter | 470μF; 35V; 85°C; Radial; 2000h D10xL16mm; 0.63A@120Hz | RW | RW471M035G160A |
| C ₂ , C ₈ , C ₉ | Audio speaker | Acoustic coupling | 47μF; 35V; 85°C; Radial; 2000h D10xL12.5mm; 0.15A@120Hz | NR | NR470M035G125ETA |


TECHNICAL TERMS

| Item | Description | SI units |
|------------------|--|----------|
| V_R | Rated voltage | V |
| V_S | Surge voltage | V |
| V_{Ripple_AC} | Ripple voltage | V |
| $V_{Reverse}$ | Reverse voltage | V |
| V_A | Application voltage, operating voltage | A |
| I_R | Rated ripple current, rated alternating current | A |
| I_A | Application current, operating current | A |
| I_{A_Max} | Maximum application current, maximum operating current | A |
| I_{Leak} | Leakage current | A |
| T_{0_Max} | Upper category temperature | °C |
| T_{0_Min} | Lower category temperature | °C |
| T_A | Application temperature, operating temperature | °C |
| T_S | Capacitor surface temperature | °C |
| ΔT_0 | Core temperature increase by internal heating due to rated ripple current | °C |
| ΔT_A | Core temperature increase by internal heating due to application ripple current | °C |
| C_R | Rated capacitance | F |
| ΔC | Capacitance tolerance | % |
| C/C_R | Capacitance drift | - |
| $\tan \delta$ | Dissipation factor | - |
| Z | Impedance | Ω |
| ESR | Equivalent series resistance | Ω |
| ESL | Equivalent series inductance | H |
| X_C | Capacitive reactance | Ω |
| X_L | Inductive reactance | Ω |
| f | Frequency | Hz |
| ω | Angular frequency | Hz |
| λ | FIT = failure in time | - |
| K_f | Multiplier for ripple current vs. frequency | - |
| K_T | Multiplier for ripple current vs. temperature | - |
| K_0 | Dielectric constant derating coefficient at high temperature | - |
| L_0 | Specified lifetime at max. capacitor temperature, rated voltage (and rated ripple current) | h |
| L_A | Expected lifetime at application conditions | h |

OVERVIEW ▪ SMD HYBRID CONDUCTIVE POLYMER CAPACITORS



Features



| Series | Page | AEC-Q200 | High Temperature | Low ESR | Slim Type | Standard | Ultra Miniaturized | Ultra Low ESR | Vibration Proof | Temperature Range (°C) | | Voltage Range (V) | | Capacitance Range (µF) | | Endurance (hours) |
|--------|------|----------|------------------|---------|-----------|----------|--------------------|---------------|-----------------|------------------------|------|-------------------|-----|------------------------|------|-------------------|
| AA | 28 | • | | • | • | • | | | • | -55 | +105 | 16 | 200 | 10 | 1500 | 5000 to 10000 |
| AC | 33 | • | • | • | • | | | | • | -55 | +125 | 16 | 100 | 10 | 1500 | 4000 |
| AB | 38 | • | • | • | | | • | • | • | -55 | +125 | 25 | 35 | 33 | 680 | 4000 |
| AN | 42 | • | • | • | | | | | • | -55 | +135 | 16 | 100 | 10 | 820 | 4000 |
| AU | 47 | • | • | | | | | • | • | -55 | +135 | 25 | 100 | 22 | 680 | 4000 |
| AR | 51 | • | • | • | | | | | • | -55 | +145 | 16 | 80 | 22 | 560 | 2000 |
| AP | 56 | • | • | • | | | | | • | -55 | +150 | 16 | 80 | 22 | 560 | 1000 |

AU: New Product Series

AA SERIES ▀ LONG LIFE UP TO 10000 HOURS

KEY FEATURES




- HYBRID CONDUCTIVE POLYMER • SMD type
- Endurance: 105°C • 5000 up to 10000 hours
- Low ESR and high ripple current
- Vibration Proof (VP) version (up to 30g) available
- AEC-Q200 version available



SPECIFICATIONS

| Items | | Performance Characteristics |
|--|----------------|---|
| Operating Temperature Range | | -55 ~ +105°C |
| Rated Voltage Range | V_R | 16 ~ 200V DC |
| Surge Voltage | V_S | ($V_R \leq 100V$): $V_S = 1.25 \cdot V_R$ ($V_R \geq 200V$): $V_S = 1.15 \cdot V_R$ |
| Capacitance Range | C_R | 10 ~ 1500 μ F |
| Cap. Tolerance | ΔC | $\pm 20\%$ (120Hz • 20°C) |
| Leakage Current (20°C • V_R applied) | I_{LEAK} | Not to exceed the values shown in standard ratings After 2 minutes |
| Dissipation Factor % (20°C • 120Hz) | $\tan \delta$ | Not to exceed the values shown in standard ratings |
| Equivalent Series Resistance (20°C • 100kHz) | ESR | Not to exceed the values shown in standard ratings |
| Lifetime Test | | |
| Endurance 105°C (V_R & I_R applied) | Test | 10000 hours $\leq 100V$ 5000 hours $> 100V$ |
| | $\Delta C/C_R$ | Within $\pm 30\%$ of the initial value |
| | $\tan \delta$ | Less than 200% of the specified value |
| | ESR | Less than 200% of the specified value |
| | I_{Leak} | Less than the specified value |


DIMENSIONS STANDARD PACKAGE ▀ All dimensions in mm

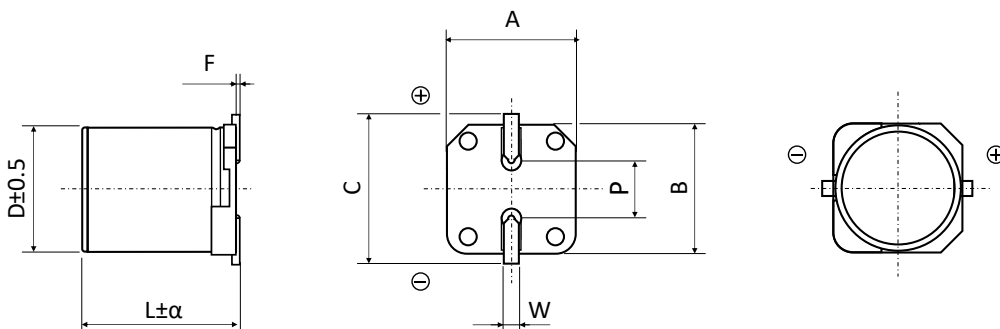

DIMENSIONS STANDARD PACKAGE ▪ All dimensions in mm

| ϕD | L | α | $A \pm 0.2$ | $B \pm 0.2$ | $C \pm 0.2$ | F | $P \pm 0.2$ | W |
|----------|------|----------|-------------|-------------|-------------|----------|-------------|------------|
| 5.0 | 5.8 | 0.3 | 5.3 | 5.3 | 5.9 | 0 to 0.3 | 1.4 | 0.5 to 0.8 |
| 6.3 | 5.8 | 0.3 | 6.6 | 6.6 | 7.2 | 0 to 0.3 | 2.2 | 0.5 to 0.8 |
| 6.3 | 7.7 | 0.3 | 6.6 | 6.6 | 7.2 | 0 to 0.3 | 2.2 | 0.5 to 0.8 |
| 8.0 | 10.5 | 0.3 | 8.3 | 8.3 | 9.0 | 0 to 0.3 | 3.1 | 0.7 to 1.1 |
| 8.0 | 11.7 | 0.3 | 8.3 | 8.3 | 9.0 | 0 to 0.3 | 3.1 | 0.7 to 1.1 |
| 10.0 | 10.5 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 0.7 to 1.1 |
| 10.0 | 12.4 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 1.0 to 1.4 |
| 10.0 | 16.5 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 1.0 to 1.4 |


DIMENSIONS VP PACKAGE (VIBRATION-PROOF) Ø D6.3 ▪ All dimensions in mm

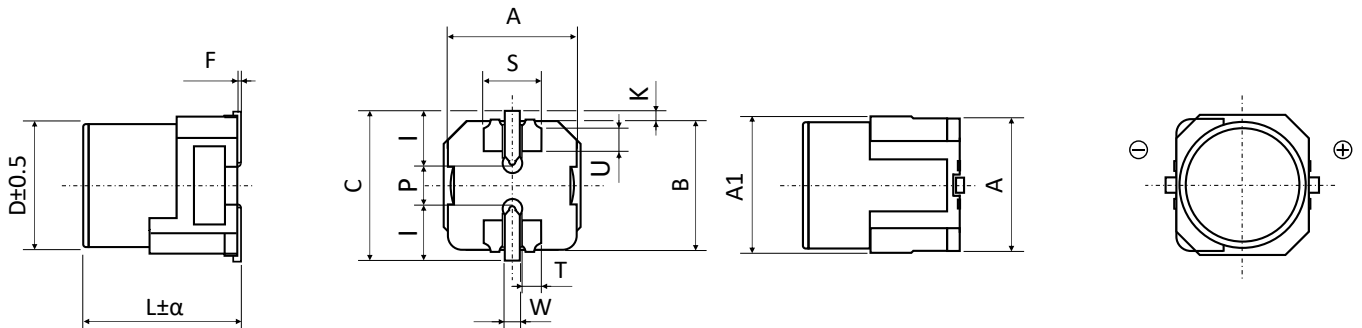

| ϕD | L | α | $A \pm 0.2$ | A1 (max.) | $B \pm 0.2$ | C (max.) | F | K |
|----------|-----|-----------|-------------|-----------|-------------|----------|-----------|--------------------|
| 6.3 | 5.8 | -0.3/+0.7 | 6.6 | 7.1 | 6.6 | 7.8 | 0 to 0.15 | 0.35 +0.15/-0.2 |
| 6.3 | 7.7 | -0.3/+0.7 | 6.6 | 7.1 | 6.6 | 7.8 | 0 to 0.15 | 0.35 +0.15/-0.2 |

| ϕD | L | $P \pm 0.2$ | $S \pm 0.1$ | $I \pm 0.1$ | $T \pm 0.1$ | $U \pm 0.1$ | $W \pm 0.1$ |
|----------|-----|-------------|-------------|-------------|-------------|-------------|-------------|
| 6.3 | 5.8 | 2.2 | 2.9 | 2.4 | 1.1 | 1.55 | 0.65 |
| 6.3 | 7.7 | 2.2 | 2.9 | 2.4 | 1.1 | 1.55 | 0.65 |

DIMENSIONS VP PACKAGE (VIBRATION-PROOF) Ø D8 and D10 ▪ All dimensions in mm

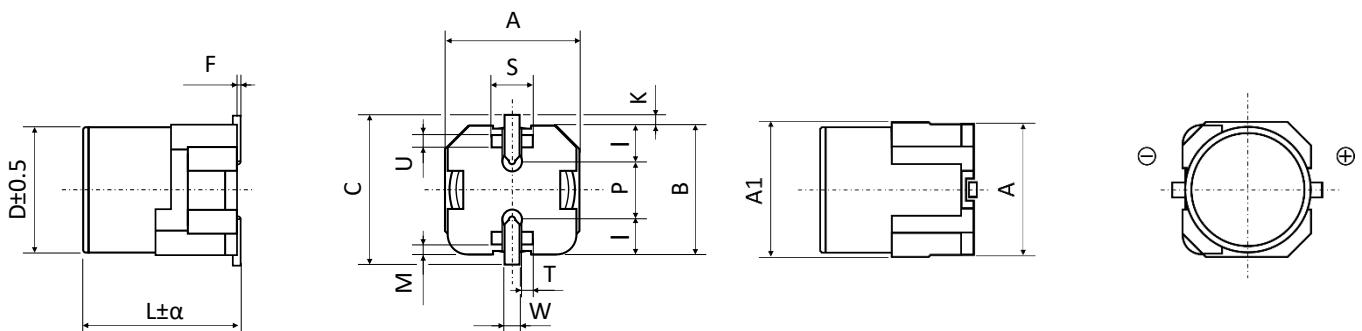

DIMENSIONS VP PACKAGE (VIBRATION-PROOF) Ø D8 and D10 ▪ All dimensions in mm

| ø D | L | α | A ± 0.2 | A1 (max.) | B ± 0.2 | C (max.) | F | K ± 0.2 |
|------|------|-----------|---------|-----------|---------|----------|-----------|---------|
| 8.0 | 10.5 | -0.3/+0.7 | 8.3 | 8.8 | 8.3 | 10.0 | 0 to 0.15 | 0.7 |
| 8.0 | 11.7 | -0.3/+0.7 | 8.3 | 8.8 | 8.3 | 10.0 | 0 to 0.15 | 0.7 |
| 10.0 | 10.5 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |
| 10.0 | 12.4 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |
| 10.0 | 16.5 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |

| ø D | L | P ± 0.2 | S ± 0.1 | I ± 0.1 | T ± 0.1 | U ± 0.1 | W ± 0.1 | M ± 0.1 |
|------|------|---------|---------|---------|---------|---------|---------|---------|
| 8.0 | 10.5 | 3.1 | 3 | 3.4 | 1.4 | 0.7 | 1.2 | 0.7 |
| 8.0 | 11.7 | 3.1 | 3 | 3.4 | 1.4 | 0.7 | 1.2 | 0.7 |
| 10.0 | 10.5 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |
| 10.0 | 12.4 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |
| 10.0 | 16.5 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |

STANDARD RATINGS

Part number shows blister tape on paper reel

| V _R (V) | | | C _R (µF) | ø D (mm) | L (mm) | I _{LEAK} (µA, 2min) | tanδ +20°C ▪ 120Hz (%) | Max. ESR +20°C ▪ 100kHz (mΩ) | I _R ▪ Max. Ripple Cur- rent +105°C ▪ 100kHz (mA rms) | CapXon Part Number |
|-----------------------|----------|-----------------|------------------------|-------------|-----------|------------------------------------|---------------------------------|---------------------------------------|--|---------------------|
| | Standard | Vibration-proof | | | | | | | | |
| 16 | • | • | 100 | 6.3 | 5.8 | 16.0 | 16 | 50 | 1300 | AA101M016E058PTR □□ |
| | • | • | 120 | 6.3 | 5.8 | 19.2 | 16 | 50 | 1300 | AA121M016E058PTR □□ |
| | • | • | 150 | 6.3 | 5.8 | 24.0 | 16 | 50 | 1300 | AA151M016E058PTR □□ |
| | • | • | 220 | 6.3 | 7.7 | 35.2 | 16 | 30 | 2000 | AA221M016E077PTR □□ |
| | • | • | 270 | 6.3 | 7.7 | 43.2 | 16 | 30 | 2000 | AA271M016E077PTR □□ |
| | • | • | 330 | 10 | 10.5 | 52.8 | 16 | 20 | 2500 | AA331M016G105PTR □□ |
| | • | • | 470 | 8 | 10.5 | 75.2 | 16 | 27 | 2300 | AA471M016F105PTR □□ |
| | • | • | 470 | 10 | 10.5 | 75.2 | 16 | 20 | 2500 | AA471M016G105PTR □□ |
| | • | • | 560 | 8 | 11.7 | 89.6 | 16 | 23 | 2400 | AA561M016F117PTR □□ |
| | • | • | 560 | 10 | 10.5 | 89.6 | 16 | 20 | 2500 | AA561M016G105PTR □□ |
| 25 | • | • | 820 | 10 | 12.4 | 131.2 | 16 | 16 | 2800 | AA821M016G124PTR □□ |
| | • | • | 1500 | 10 | 16.5 | 240.0 | 16 | 11 | 5000 | AA152M016G165PTR □□ |
| | • | • | 33 | 5 | 5.8 | 8.3 | 14 | 80 | 900 | AA330M025C058PTR □□ |
| | • | • | 56 | 6.3 | 5.8 | 14.0 | 14 | 50 | 1300 | AA560M025E058PTR □□ |
| | • | • | 100 | 6.3 | 7.7 | 25.0 | 14 | 30 | 2000 | AA101M025E077PTR □□ |
| | • | • | 220 | 8 | 10.5 | 55.0 | 14 | 27 | 2300 | AA221M025F105PTR □□ |
| | • | • | 270 | 8 | 11.7 | 67.5 | 14 | 25 | 2400 | AA271M025F117PTR □□ |
| | • | • | 330 | 10 | 10.5 | 82.5 | 14 | 20 | 2500 | AA331M025G105PTR □□ |
| | • | • | 470 | 10 | 12.4 | 117.5 | 14 | 16 | 2800 | AA471M025G124PTR □□ |
| | • | • | 560 | 10 | 16.5 | 140.0 | 14 | 11 | 5000 | AA561M025G165PTR □□ |

□ see description at end of standard ratings

STANDARD RATINGS

Part number shows blister tape on paper reel

| V _R (V) | Standard | Vibration-proof | C _R (μF) | ∅ D (mm) | L (mm) | I _{LEAK} (μA, 2min) | tanδ +20°C · 120Hz (%) | Max. ESR +20°C · 100kHz (mΩ) | I _R - Max. Ripple Current +105°C · 100kHz (mA rms) | CapXon Part Number |
|--------------------|----------|-----------------|---------------------|----------|--------|------------------------------|------------------------|------------------------------|---|---------------------|
| 35 | • | | 22 | 5 | 5.8 | 7.7 | 12 | 100 | 900 | AA220M035C058PTR □□ |
| | • | • | 27 | 6.3 | 5.8 | 9.5 | 12 | 60 | 1300 | AA270M035E058PTR □□ |
| | • | • | 47 | 6.3 | 5.8 | 16.5 | 12 | 60 | 1300 | AA470M035E058PTR □□ |
| | • | • | 68 | 6.3 | 7.7 | 23.8 | 12 | 35 | 2000 | AA680M035E077PTR □□ |
| | • | • | 100 | 8 | 10.5 | 35.0 | 12 | 27 | 2300 | AA101M035F105PTR □□ |
| | • | • | 150 | 8 | 10.5 | 52.5 | 12 | 27 | 2300 | AA151M035F105PTR □□ |
| | • | • | 180 | 8 | 11.7 | 63.0 | 12 | 25 | 2400 | AA181M035F117PTR □□ |
| | • | • | 270 | 10 | 10.5 | 94.5 | 12 | 20 | 2500 | AA271M035G105PTR □□ |
| | • | • | 330 | 10 | 12.4 | 115.5 | 12 | 17 | 2800 | AA331M035G124PTR □□ |
| | • | • | 470 | 10 | 16.5 | 164.5 | 12 | 11 | 5000 | AA471M035G165PTR □□ |
| 50 | • | | 10 | 5 | 5.8 | 5.0 | 10 | 120 | 750 | AA100M050C058PTR □□ |
| | • | • | 22 | 6.3 | 5.8 | 11.0 | 10 | 80 | 1100 | AA220M050E058PTR □□ |
| | • | • | 33 | 6.3 | 7.7 | 16.5 | 10 | 40 | 1600 | AA330M050E077PTR □□ |
| | • | • | 56 | 10 | 10.5 | 28.0 | 10 | 28 | 2000 | AA680M050F105PTR □□ |
| | • | • | 68 | 8 | 10.5 | 34.0 | 10 | 30 | 1800 | AA820M050F117PTR □□ |
| | • | • | 82 | 8 | 11.7 | 41.0 | 10 | 28 | 1880 | AA680M050G105PTR □□ |
| | • | • | 100 | 10 | 10.5 | 50.0 | 10 | 28 | 2000 | AA101M050G105PTR □□ |
| | • | • | 120 | 10 | 12.4 | 60.0 | 10 | 25 | 2200 | AA121M050G124PTR □□ |
| | • | • | 220 | 10 | 16.5 | 110.0 | 10 | 13 | 4600 | AA221M050G165PTR □□ |
| 63 | • | • | 10 | 6.3 | 5.8 | 6.3 | 8 | 120 | 1000 | AA100M063E058PTR □□ |
| | • | • | 22 | 6.3 | 7.7 | 13.9 | 8 | 80 | 1500 | AA220M063E077PTR □□ |
| | • | • | 33 | 8 | 10.5 | 20.8 | 8 | 40 | 1700 | AA330M063F105PTR □□ |
| | • | • | 47 | 8 | 10.5 | 29.6 | 8 | 40 | 1700 | AA470M063F105PTR □□ |
| | • | • | 47 | 8 | 11.7 | 29.6 | 8 | 38 | 1750 | AA470M063F117PTR □□ |
| | • | • | 56 | 10 | 10.5 | 35.3 | 8 | 30 | 1800 | AA560M063G105PTR □□ |
| | • | • | 68 | 10 | 10.5 | 42.8 | 8 | 30 | 1800 | AA680M063G105PTR □□ |
| | • | • | 82 | 10 | 12.4 | 51.7 | 8 | 22 | 2100 | AA820M063G124PTR □□ |
| | • | • | 150 | 10 | 16.5 | 94.5 | 8 | 15 | 4350 | AA151M063G165PTR □□ |
| 80 | • | • | 22 | 8 | 10.5 | 17.6 | 8 | 45 | 1550 | AA220M080F105PTR □□ |
| | • | • | 27 | 8 | 11.7 | 21.6 | 8 | 43 | 1600 | AA270M080F117PTR □□ |
| | • | • | 33 | 10 | 10.5 | 26.4 | 8 | 36 | 1700 | AA330M080G105PTR □□ |
| | • | • | 47 | 10 | 10.5 | 37.6 | 8 | 36 | 1700 | AA470M080G105PTR □□ |
| | • | • | 56 | 10 | 12.4 | 44.8 | 8 | 32 | 1800 | AA560M080G124PTR □□ |
| 100 | • | • | 22 | 8 | 10.5 | 22.0 | 8 | 55 | 1400 | AA220M100F105PTR □□ |
| | • | • | 22 | 8 | 11.7 | 22.0 | 8 | 52 | 1450 | AA220M100F117PTR □□ |
| | • | • | 22 | 10 | 10.5 | 22.0 | 8 | 45 | 1500 | AA220M100G105PTR □□ |
| | • | • | 27 | 10 | 12.4 | 27.0 | 8 | 40 | 1600 | AA270M100G124PTR □□ |
| | • | • | 33 | 10 | 12.4 | 33.0 | 8 | 40 | 1600 | AA330M100G124PTR □□ |
| 200 | • | • | 10 | 10 | 12.4 | 20.0 | 12 | 100 | 800 | AA100M200G124PTR □□ |

□□: Leave **blank** for Standard package
 □□: Enter **W** for Vibration proof version

□□: Enter **X** for AEC-Q200
 □□: Enter **XW** for AEC-Q200 and Vibration Proof version

MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY

| | | | | |
|-----------------------|-----------------------------|------------------------------|-------------------------------|-----------------------------|
| Frequency (Hz) | 100 ≤ Freq. < 120 | 120 ≤ Freq. < 200 | 200 ≤ Freq. < 300 | 300 ≤ Freq. < 500 |
| Coefficient K_f | 0.10 | 0.10 | 0.10 | 0.15 |
| Frequency (Hz) | 500 ≤ Freq. < 1k | 1k ≤ Freq. < 2k | 2k ≤ Freq. < 3k | 3k ≤ Freq. < 5k |
| Coefficient K_f | 0.20 | 0.30 | 0.40 | 0.45 |
| Frequency (Hz) | 5k ≤ Freq. < 10k | 10k ≤ Freq. < 15k | 15k ≤ Freq. < 20k | 20k ≤ Freq. < 40k |
| Coefficient K_f | 0.50 | 0.60 | 0.65 | 0.75 |
| Frequency (Hz) | 40k ≤ Freq. < 50k | 50k ≤ Freq. < 100k | 100k ≤ Freq. < 500k | 500k ≤ Freq. < 1M |
| Coefficient K_f | 0.80 | 0.85 | 1.00 | 1.05 |

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our “General Precautions and Guidelines” as well as our “Packaging Information”. Please refer to the following links in the table.

| | |
|------------------------------------|----------------------------------|
| | |
| General Precautions and Guidelines | Packaging Information Hybrid SMD |
| Page 96 | Page 81 |

DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).

Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.

For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.

For further information, please visit our website www.capxongroup.com or contact CapXon directly.

AC SERIES ▀ LONG LIFE AT 125°C

KEY FEATURES



AEC-Q200



SHOCK VIBRATION



TEMPERATURE HIGH


- HYBRID CONDUCTIVE POLYMER • SMD type
- Endurance: 125°C • 4 000 hours
- Low ESR and high ripple current
- Vibration Proof (VP) version (up to 30g) available
- AEC-Q200 version available



SPECIFICATIONS

| Items | | Performance Characteristics |
|--|----------------|---|
| Operating Temperature Range | | -55 ~ +125°C |
| Rated Voltage Range | V_R | 16 ~ 100V DC |
| Surge Voltage | V_S | ($V_R \leq 100V$): $V_S = 1.25 \cdot V_R$ |
| Capacitance Range | C_R | 10 ~ 1500 μ F |
| Cap. Tolerance | ΔC | $\pm 20\%$ (120Hz • 20°C) |
| Leakage Current (20°C • V_R applied) | I_{LEAK} | Not to exceed the values shown in standard ratings After 2 minutes |
| Dissipation Factor % (20°C • 120Hz) | $\tan \delta$ | Not to exceed the values shown in standard ratings |
| Equivalent Series Resistance (20°C • 100kHz) | ESR | Not to exceed the values shown in standard ratings |
| Lifetime Test | | |
| Endurance 125°C (V_R & I_R applied) | Test | 4 000 hours |
| | $\Delta C/C_R$ | Within $\pm 30\%$ of the initial value |
| | $\tan \delta$ | Less than 200% of the specified value |
| | ESR | Less than 200% of the specified value |
| | I_{Leak} | Less than the specified value |


DIMENSIONS STANDARD PACKAGE ▀ All dimensions in mm

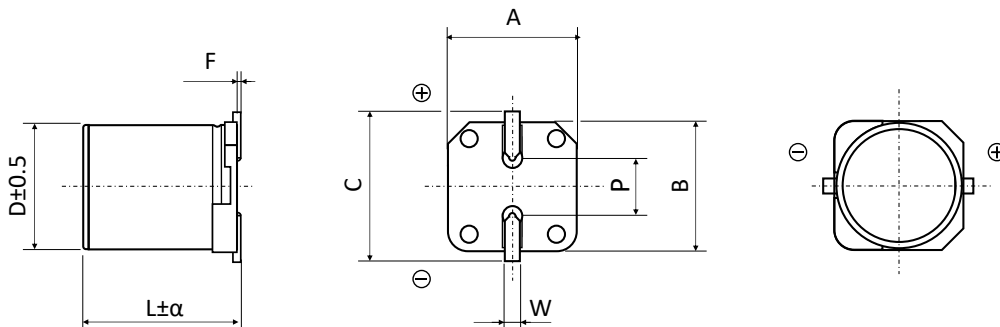

DIMENSIONS STANDARD PACKAGE ▪ All dimensions in mm

| ϕD | L | α | $A \pm 0.2$ | $B \pm 0.2$ | $C \pm 0.2$ | F | $P \pm 0.2$ | W |
|----------|------|----------|-------------|-------------|-------------|----------|-------------|------------|
| 5.0 | 5.8 | 0.3 | 5.3 | 5.3 | 5.9 | 0 to 0.3 | 1.4 | 0.5 to 0.8 |
| 6.3 | 5.8 | 0.3 | 6.6 | 6.6 | 7.2 | 0 to 0.3 | 2.2 | 0.5 to 0.8 |
| 6.3 | 7.7 | 0.3 | 6.6 | 6.6 | 7.2 | 0 to 0.3 | 2.2 | 0.5 to 0.8 |
| 8.0 | 10.5 | 0.3 | 8.3 | 8.3 | 9.0 | 0 to 0.3 | 3.1 | 0.7 to 1.1 |
| 8.0 | 11.7 | 0.3 | 8.3 | 8.3 | 9.0 | 0 to 0.3 | 3.1 | 0.7 to 1.1 |
| 10.0 | 10.5 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 0.7 to 1.1 |
| 10.0 | 12.4 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 1.0 to 1.4 |
| 10.0 | 16.5 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 1.0 to 1.4 |


DIMENSIONS VP PACKAGE (VIBRATION-PROOF) Ø D6.3 ▪ All dimensions in mm

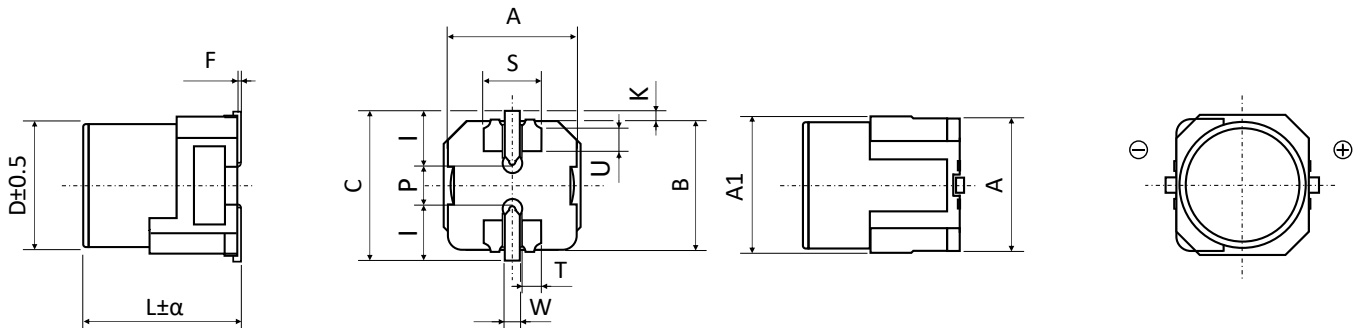

| ϕD | L | α | $A \pm 0.2$ | A1 (max.) | $B \pm 0.2$ | C (max.) | F | K |
|----------|-----|-----------|-------------|-----------|-------------|----------|-----------|--------------------|
| 6.3 | 5.8 | -0.3/+0.7 | 6.6 | 7.1 | 6.6 | 7.8 | 0 to 0.15 | 0.35 +0.15/-0.2 |
| 6.3 | 7.7 | -0.3/+0.7 | 6.6 | 7.1 | 6.6 | 7.8 | 0 to 0.15 | 0.35 +0.15/-0.2 |

| ϕD | L | $P \pm 0.2$ | $S \pm 0.1$ | $I \pm 0.1$ | $T \pm 0.1$ | $U \pm 0.1$ | $W \pm 0.1$ |
|----------|-----|-------------|-------------|-------------|-------------|-------------|-------------|
| 6.3 | 5.8 | 2.2 | 2.9 | 2.4 | 1.1 | 1.55 | 0.65 |
| 6.3 | 7.7 | 2.2 | 2.9 | 2.4 | 1.1 | 1.55 | 0.65 |

DIMENSIONS VP PACKAGE (VIBRATION-PROOF) Ø D8 and D10 ▪ All dimensions in mm

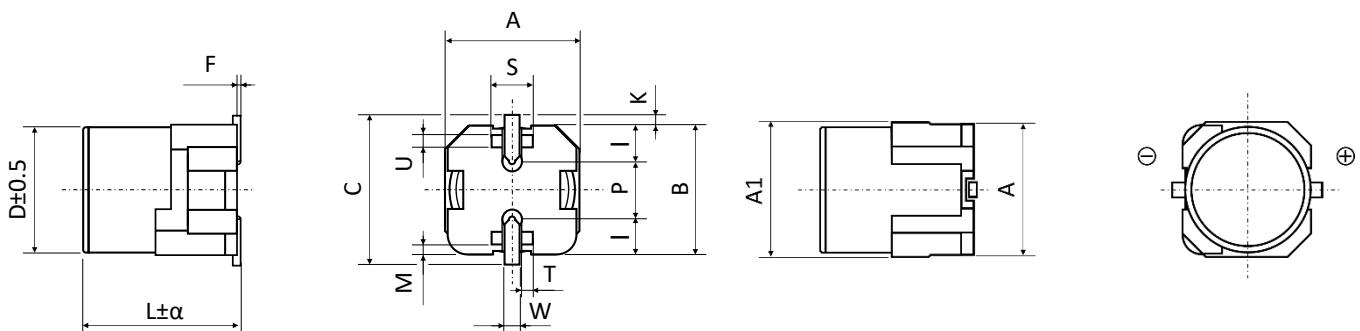

DIMENSIONS VP PACKAGE (VIBRATION-PROOF) Ø D8 and D10 ▪ All dimensions in mm

| ø D | L | α | A ± 0.2 | A1 (max.) | B ± 0.2 | C (max.) | F | K ± 0.2 |
|------|------|-----------|---------|-----------|---------|----------|-----------|---------|
| 8.0 | 10.5 | -0.3/+0.7 | 8.3 | 8.8 | 8.3 | 10.0 | 0 to 0.15 | 0.7 |
| 8.0 | 11.7 | -0.3/+0.7 | 8.3 | 8.8 | 8.3 | 10.0 | 0 to 0.15 | 0.7 |
| 10.0 | 10.5 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |
| 10.0 | 12.4 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |
| 10.0 | 16.5 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |

| ø D | L | P ± 0.2 | S ± 0.1 | I ± 0.1 | T ± 0.1 | U ± 0.1 | W ± 0.1 | M ± 0.1 |
|------|------|---------|---------|---------|---------|---------|---------|---------|
| 8.0 | 10.5 | 3.1 | 3 | 3.4 | 1.4 | 0.7 | 1.2 | 0.7 |
| 8.0 | 11.7 | 3.1 | 3 | 3.4 | 1.4 | 0.7 | 1.2 | 0.7 |
| 10.0 | 10.5 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |
| 10.0 | 12.4 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |
| 10.0 | 16.5 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |

STANDARD RATINGS

Part number shows blister tape on paper reel

| V _R (V) | | | C _R (µF) | ø D (mm) | L (mm) | I _{LEAK} (µA, 2min) | tanδ +20°C ▪ 120Hz (%) | Max. ESR +20°C ▪ 100kHz (mΩ) | I _R ▪ Max. Ripple Cur- rent +125°C ▪ 100kHz (mA rms) | CapXon Part Number |
|-----------------------|----------|-----------------|------------------------|-------------|-----------|------------------------------------|---------------------------------|---------------------------------------|--|--------------------|
| | Standard | Vibration-proof | | | | | | | | |
| 16 | • | • | 100 | 6.3 | 5.8 | 16.0 | 16 | 50 | 900 | AC101M016E058PTR |
| | • | • | 120 | 6.3 | 5.8 | 19.2 | 16 | 50 | 900 | AC121M016E058PTR |
| | • | • | 150 | 6.3 | 5.8 | 24.0 | 16 | 50 | 900 | AC151M016E058PTR |
| | • | • | 220 | 6.3 | 7.7 | 35.2 | 16 | 30 | 1400 | AC221M016E077PTR |
| | • | • | 270 | 6.3 | 7.7 | 43.2 | 16 | 30 | 1700 | AC271M016E077PTR |
| | • | • | 330 | 10 | 10.5 | 52.8 | 16 | 20 | 2000 | AC331M016G105PTR |
| | • | • | 470 | 8 | 10.5 | 75.2 | 16 | 27 | 1600 | AC471M016F105PTR |
| | • | • | 470 | 10 | 10.5 | 75.2 | 16 | 20 | 2000 | AC471M016G105PTR |
| | • | • | 560 | 8 | 11.7 | 89.6 | 16 | 23 | 1650 | AC561M016F117PTR |
| | • | • | 560 | 10 | 10.5 | 89.6 | 16 | 20 | 2000 | AC561M016G105PTR |
| 25 | • | • | 820 | 10 | 12.4 | 131.2 | 16 | 16 | 2260 | AC821M016G124PTR |
| | • | • | 1500 | 10 | 16.5 | 240.0 | 16 | 11 | 4000 | AC152M016G165PTR |
| | • | • | 33 | 5 | 5.8 | 8.3 | 14 | 80 | 550 | AC330M025C058PTR |
| | • | • | 56 | 6.3 | 5.8 | 14.0 | 14 | 50 | 900 | AC560M025E058PTR |
| | • | • | 100 | 6.3 | 7.7 | 25.0 | 14 | 30 | 1400 | AC101M025E077PTR |
| | • | • | 220 | 8 | 10.5 | 55.0 | 14 | 27 | 1600 | AC221M025F105PTR |
| | • | • | 270 | 8 | 11.7 | 67.5 | 14 | 25 | 1650 | AC271M025F117PTR |
| | • | • | 330 | 10 | 10.5 | 82.5 | 14 | 20 | 2000 | AC331M025G105PTR |
| • | • | 470 | 10 | 12.4 | 117.5 | 14 | 16 | 2260 | AC471M025G124PTR | |
| • | • | 560 | 10 | 16.5 | 140.0 | 14 | 11 | 4000 | AC561M025G165PTR | |

see description at end of standard ratings

STANDARD RATINGS

Part number shows blister tape on reel version

| V _R (V) | Standard | Vibration-proof | C _R (μF) | ∅ D (mm) | L (mm) | I _{LEAK} (μA, 2min) | tanδ +20°C · 120Hz (%) | Max. ESR +20°C · 100kHz (mΩ) | I _R · Max. Ripple Current +125°C · 100kHz (mA rms) | CapXon Part Number |
|--------------------|----------|-----------------|---------------------|----------|--------|------------------------------|------------------------|------------------------------|---|---------------------|
| 35 | • | | 22 | 5 | 5.8 | 7.7 | 12 | 100 | 550 | AC220M035C058PTR □□ |
| | • | • | 47 | 6.3 | 5.8 | 16.5 | 12 | 60 | 900 | AC470M035E058PTR □□ |
| | • | • | 68 | 6.3 | 7.7 | 23.8 | 12 | 35 | 1400 | AC680M035E077PTR □□ |
| | • | • | 100 | 8 | 10.5 | 35.0 | 12 | 27 | 1600 | AC101M035F105PTR □□ |
| | • | • | 150 | 8 | 10.5 | 52.5 | 12 | 27 | 1600 | AC151M035F105PTR □□ |
| | • | • | 180 | 8 | 11.7 | 63.0 | 12 | 25 | 1650 | AC181M035F117PTR □□ |
| | • | • | 270 | 10 | 10.5 | 94.5 | 12 | 20 | 2000 | AC271M035G105PTR □□ |
| | • | • | 330 | 10 | 12.4 | 115.5 | 12 | 17 | 2260 | AC331M035G124PTR □□ |
| 50 | • | | 10 | 5 | 5.8 | 5.0 | 10 | 120 | 500 | AC100M050C058PTR □□ |
| | • | • | 22 | 6.3 | 5.8 | 11.0 | 10 | 80 | 750 | AC220M050E058PTR □□ |
| | • | • | 33 | 6.3 | 7.7 | 16.5 | 10 | 40 | 1100 | AC330M050E077PTR □□ |
| | • | • | 56 | 10 | 10.5 | 28.0 | 10 | 28 | 1600 | AC560M050G105PTR □□ |
| | • | • | 68 | 8 | 10.5 | 34.0 | 10 | 30 | 1250 | AC680M050F105PTR □□ |
| | • | • | 82 | 8 | 11.7 | 41.0 | 10 | 28 | 1300 | AC820M050F117PTR □□ |
| | • | • | 100 | 10 | 10.5 | 50.0 | 10 | 28 | 1600 | AC101M050G105PTR □□ |
| | • | • | 120 | 10 | 10.5 | 60.0 | 10 | 28 | 1600 | AC121M050G105PTR □□ |
| | • | • | 120 | 10 | 12.4 | 60.0 | 10 | 25 | 1750 | AC121M050G124PTR □□ |
| | • | • | 220 | 10 | 16.5 | 110.0 | 10 | 13 | 3700 | AC221M050G165PTR □□ |
| 63 | • | • | 10 | 6.3 | 5.8 | 6.3 | 8 | 120 | 700 | AC100M063E058PTR □□ |
| | • | • | 22 | 6.3 | 7.7 | 13.9 | 8 | 80 | 900 | AC220M063E077PTR □□ |
| | • | • | 33 | 8 | 10.5 | 20.8 | 8 | 40 | 1100 | AC330M063F105PTR □□ |
| | • | • | 47 | 8 | 10.5 | 29.6 | 8 | 40 | 1100 | AC470M063F105PTR □□ |
| | • | • | 47 | 8 | 11.7 | 29.6 | 8 | 38 | 1130 | AC470M063F117PTR □□ |
| | • | • | 56 | 10 | 10.5 | 35.3 | 8 | 30 | 1400 | AC560M063G105PTR □□ |
| | • | • | 68 | 10 | 10.5 | 42.8 | 8 | 30 | 1400 | AC680M063G105PTR □□ |
| | • | • | 82 | 10 | 12.4 | 51.7 | 8 | 22 | 1650 | AC820M063G124PTR □□ |
| | • | • | 150 | 10 | 16.5 | 94.5 | 8 | 15 | 3500 | AC151M063G165PTR □□ |
| 80 | • | • | 22 | 8 | 10.5 | 17.6 | 8 | 45 | 1050 | AC220M080F105PTR □□ |
| | • | • | 27 | 8 | 11.7 | 21.6 | 8 | 43 | 1080 | AC270M080F117PTR □□ |
| | • | • | 33 | 10 | 10.5 | 26.4 | 8 | 36 | 1360 | AC330M080G105PTR □□ |
| | • | • | 47 | 10 | 10.5 | 37.6 | 8 | 36 | 1360 | AC470M080G105PTR □□ |
| | • | • | 56 | 10 | 12.4 | 44.8 | 8 | 35 | 1440 | AC560M080G124PTR □□ |
| | • | • | 68 | 10 | 12.4 | 54.4 | 8 | 32 | 1540 | AC680M080G124PTR □□ |
| 100 | • | • | 22 | 8 | 10.5 | 22.0 | 8 | 55 | 950 | AC220M100F105PTR □□ |
| | • | • | 22 | 8 | 11.7 | 22.0 | 8 | 52 | 980 | AC220M100F117PTR □□ |
| | • | • | 22 | 10 | 10.5 | 22.0 | 8 | 45 | 1200 | AC220M100G105PTR □□ |
| | • | • | 27 | 10 | 12.4 | 27.0 | 8 | 40 | 1360 | AC270M100G124PTR □□ |
| | • | • | 33 | 10 | 12.4 | 33.0 | 8 | 40 | 1360 | AC330M100G124PTR □□ |

□□: Leave **blank** for Standard package
 □□: Enter **W** for Vibration proof version

□□: Enter **X** for AEC-Q200
 □□: Enter **XW** for AEC-Q200 and Vibration proof version

MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY

| | | | | |
|-----------------------|-----------------------------|------------------------------|-------------------------------|-----------------------------|
| Frequency (Hz) | 100 ≤ Freq. < 120 | 120 ≤ Freq. < 200 | 200 ≤ Freq. < 300 | 300 ≤ Freq. < 500 |
| Coefficient K_f | 0.10 | 0.10 | 0.10 | 0.15 |
| Frequency (Hz) | 500 ≤ Freq. < 1k | 1k ≤ Freq. < 2k | 2k ≤ Freq. < 3k | 3k ≤ Freq. < 5k |
| Coefficient K_f | 0.20 | 0.30 | 0.40 | 0.45 |
| Frequency (Hz) | 5k ≤ Freq. < 10k | 10k ≤ Freq. < 15k | 15k ≤ Freq. < 20k | 20k ≤ Freq. < 40k |
| Coefficient K_f | 0.50 | 0.60 | 0.65 | 0.75 |
| Frequency (Hz) | 40k ≤ Freq. < 50k | 50k ≤ Freq. < 100k | 100k ≤ Freq. < 500k | 500k ≤ Freq. < 1M |
| Coefficient K_f | 0.80 | 0.85 | 1.00 | 1.05 |

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our “General Precautions and Guidelines” as well as our “Packaging Information”. Please refer to the following links in the table.

| | |
|------------------------------------|----------------------------------|
| | |
| General Precautions and Guidelines | Packaging Information Hybrid SMD |
| Page 96 | Page 81 |

DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).

Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.

For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.

For further information, please visit our website www.capxongroup.com or contact CapXon directly.

AB SERIES ■ MINIATURIZED HIGH RIPPLE CURRENT TYPE

KEY FEATURES




- HYBRID CONDUCTIVE POLYMER • SMD type
- Endurance: 125°C • 4 000 hours
- Low ESR and **extremely** high ripple current in small dimensions
- Vibration Proof (VP) version (up to 30g) available
- AEC-Q200 version available



SPECIFICATIONS

| Items | | Performance Characteristics |
|--|----------------|---|
| Operating Temperature Range | | -55 ~ +125°C |
| Rated Voltage Range | V_R | 25 ~ 35V DC |
| Surge Voltage | V_S | ($V_R \leq 100V$): $V_S = 1.25 \cdot V_R$ |
| Capacitance Range | C_R | 33 ~ 680 μ F |
| Cap. Tolerance | ΔC | $\pm 20\%$ (120Hz • 20°C) |
| Leakage Current (20°C • V_R applied) | I_{LEAK} | Not to exceed the values shown in standard ratings After 2 minutes |
| Dissipation Factor % (20°C • 120Hz) | $\tan\delta$ | Not to exceed the values shown in standard ratings |
| Equivalent Series Resistance (20°C • 100kHz) | ESR | Not to exceed the values shown in standard ratings |
| Lifetime Test | | |
| Endurance 125°C (V_R & I_R applied) | Test | 4 000 hours |
| | $\Delta C/C_R$ | Within $\pm 30\%$ of the initial value |
| | $\tan\delta$ | Less than 200% of the specified value |
| | ESR | Less than 200% of the specified value |
| | I_{Leak} | Less than the specified value |


DIMENSIONS STANDARD PACKAGE ■ All dimensions in mm

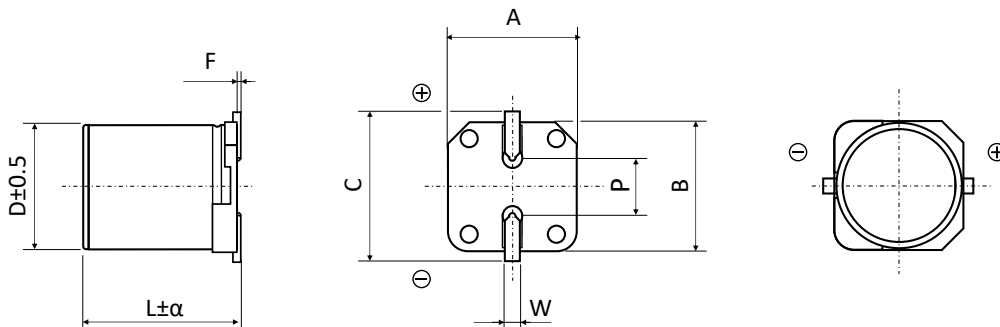

DIMENSIONS STANDARD PACKAGE ▪ All dimensions in mm

| ϕD | L | α | $A \pm 0.2$ | $B \pm 0.2$ | $C \pm 0.2$ | F | $P \pm 0.2$ | W |
|----------|------|----------|-------------|-------------|-------------|----------|-------------|------------|
| 5.0 | 5.8 | 0.3 | 5.3 | 5.3 | 5.9 | 0 to 0.3 | 1.4 | 0.5 to 0.8 |
| 6.3 | 5.8 | 0.3 | 6.6 | 6.6 | 7.2 | 0 to 0.3 | 2.2 | 0.5 to 0.8 |
| 6.3 | 7.7 | 0.3 | 6.6 | 6.6 | 7.2 | 0 to 0.3 | 2.2 | 0.5 to 0.8 |
| 8.0 | 10.5 | 0.3 | 8.3 | 8.3 | 9.0 | 0 to 0.3 | 3.1 | 0.7 to 1.1 |
| 10.0 | 10.5 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 0.7 to 1.1 |
| 10.0 | 12.4 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 1.0 to 1.4 |


DIMENSIONS VP PACKAGE (VIBRATION-PROOF) $\phi D6.3$ ▪ All dimensions in mm

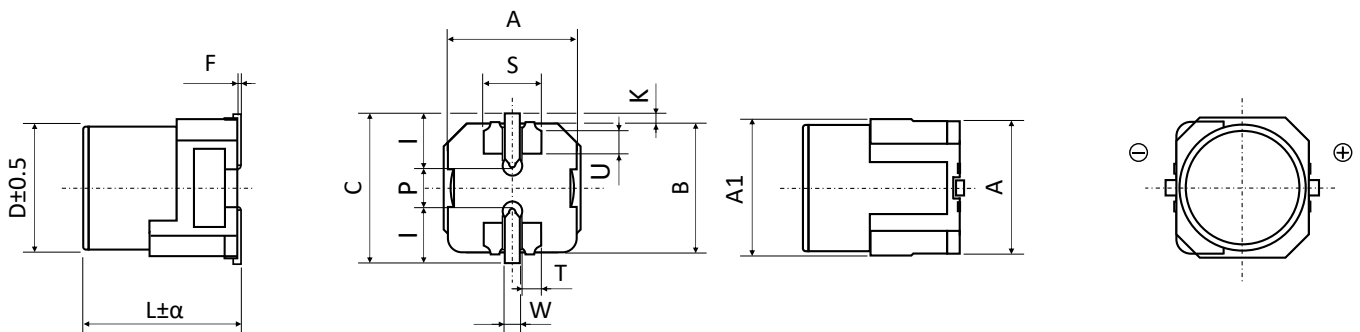

| ϕD | L | α | $A \pm 0.2$ | A1 (max.) | $B \pm 0.2$ | C (max.) | F | K |
|----------|-----|-----------|-------------|-----------|-------------|----------|-----------|--------------------|
| 6.3 | 5.8 | -0.3/+0.7 | 6.6 | 7.1 | 6.6 | 7.8 | 0 to 0.15 | 0.35 +0.15/-0.2 |
| 6.3 | 7.7 | -0.3/+0.7 | 6.6 | 7.1 | 6.6 | 7.8 | 0 to 0.15 | 0.35 +0.15/-0.2 |

| ϕD | L | $P \pm 0.2$ | $S \pm 0.1$ | $I \pm 0.1$ | $T \pm 0.1$ | $U \pm 0.1$ | $W \pm 0.1$ |
|----------|-----|-------------|-------------|-------------|-------------|-------------|-------------|
| 6.3 | 5.8 | 2.2 | 2.9 | 2.4 | 1.1 | 1.55 | 0.65 |
| 6.3 | 7.7 | 2.2 | 2.9 | 2.4 | 1.1 | 1.55 | 0.65 |

DIMENSIONS VP PACKAGE (VIBRATION-PROOF) $\phi D8$ and $D10$ ▪ All dimensions in mm

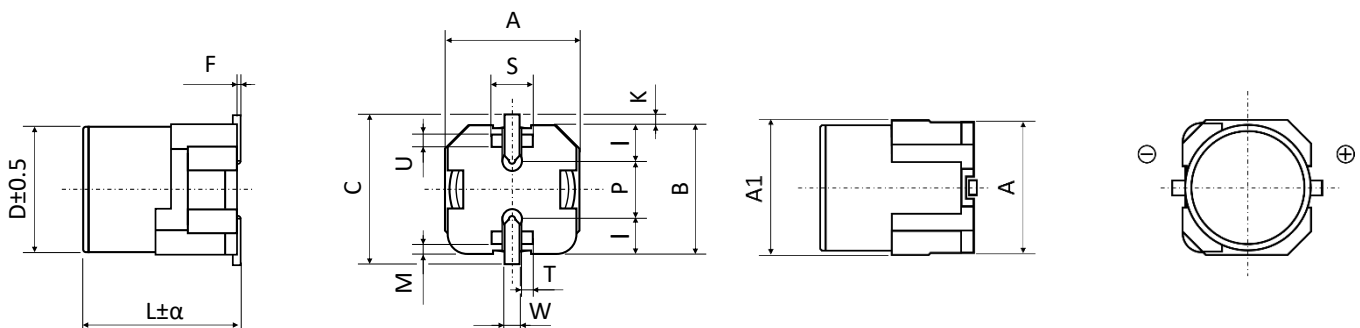

DIMENSIONS VP PACKAGE (VIBRATION-PROOF) Ø D8 and D10 ▪ All dimensions in mm

| ø D | L | α | A ± 0.2 | A1 (max.) | B ± 0.2 | C (max.) | F | K ± 0.2 |
|------|------|-----------|---------|-----------|---------|----------|-----------|---------|
| 8.0 | 10.5 | -0.3/+0.7 | 8.3 | 8.8 | 8.3 | 10.0 | 0 to 0.15 | 0.7 |
| 10.0 | 10.5 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |
| 10.0 | 12.4 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |

| ø D | L | P ± 0.2 | S ± 0.1 | I ± 0.1 | T ± 0.1 | U ± 0.1 | W ± 0.1 | M ± 0.1 |
|------|------|---------|---------|---------|---------|---------|---------|---------|
| 8.0 | 10.5 | 3.1 | 3 | 3.4 | 1.4 | 0.7 | 1.2 | 0.7 |
| 10.0 | 10.5 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |
| 10.0 | 12.4 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |

STANDARD RATINGS

Part number shows blister tape on paper reel

| V _R (V) | Standard | Vibration-proof | C _R (µF) | ø D (mm) | L (mm) | I _{LEAK} (µA, 2min) | tanδ +20°C ▪ 120Hz (%) | Max. ESR +20°C ▪ 100kHz (mΩ) | I _R ▪ Max. Ripple Current +125°C ▪ 100kHz (mA rms) | CapXon Part Number |
|--------------------|----------|-----------------|---------------------|----------|--------|------------------------------|------------------------|------------------------------|---|---------------------|
| 25 | • | | 47 | 5 | 5.8 | 11.8 | 14 | 80 | 850 | AB470M025C058PTR □□ |
| | • | | 56 | 5 | 5.8 | 14.0 | 14 | 80 | 850 | AB560M025C058PTR □□ |
| | • | • | 68 | 6.3 | 5.8 | 17.0 | 14 | 50 | 1300 | AB680M025E058PTR □□ |
| | • | • | 82 | 6.3 | 5.8 | 20.5 | 14 | 50 | 1300 | AB820M025E058PTR □□ |
| | • | • | 100 | 6.3 | 5.8 | 25.0 | 14 | 50 | 1300 | AB101M025E058PTR □□ |
| | • | • | 150 | 6.3 | 7.7 | 37.5 | 14 | 30 | 1800 | AB151M025E077PTR □□ |
| | • | • | 180 | 6.3 | 7.7 | 45.0 | 14 | 30 | 1800 | AB181M025E077PTR □□ |
| | • | • | 270 | 8 | 10.5 | 67.5 | 14 | 27 | 2000 | AB271M025F105PTR □□ |
| | • | • | 330 | 8 | 10.5 | 82.5 | 14 | 27 | 2000 | AB331M025F105PTR □□ |
| | • | • | 470 | 10 | 10.5 | 117.5 | 14 | 20 | 2800 | AB471M025G105PTR □□ |
| | • | • | 560 | 10 | 10.5 | 140.0 | 14 | 20 | 2800 | AB561M025G105PTR □□ |
| 35 | • | • | 680 | 10 | 12.4 | 170.0 | 14 | 16 | 3160 | AB681M025G124PTR □□ |
| | • | | 33 | 5 | 5.8 | 11.5 | 12 | 100 | 750 | AB330M035C058PTR □□ |
| | • | | 39 | 5 | 5.8 | 13.7 | 12 | 100 | 750 | AB390M035C058PTR □□ |
| | • | • | 56 | 6.3 | 5.8 | 19.6 | 12 | 60 | 1200 | AB560M035E058PTR □□ |
| | • | • | 68 | 6.3 | 5.8 | 23.8 | 12 | 60 | 1200 | AB680M035E058PTR □□ |
| | • | • | 100 | 6.3 | 7.7 | 35.0 | 12 | 35 | 1700 | AB101M035E077PTR □□ |
| | • | • | 120 | 6.3 | 7.7 | 42.0 | 12 | 35 | 1700 | AB121M035E077PTR □□ |
| | • | • | 180 | 8 | 10.5 | 63.0 | 12 | 27 | 2000 | AB181M035F105PTR □□ |
| | • | • | 220 | 8 | 10.5 | 77.0 | 12 | 27 | 2000 | AB221M035F105PTR □□ |
| | • | • | 330 | 10 | 10.5 | 115.5 | 12 | 20 | 2800 | AB331M035G105PTR □□ |
| | • | • | 390 | 10 | 10.5 | 136.5 | 12 | 20 | 2800 | AB391M035G105PTR □□ |

□□: Leave **blank** for Standard package
 □□: Enter **W** for Vibration proof version

□□: Enter **X** for AEC-Q200
 □□: Enter **XW** for AEC-Q200 and Vibration proof version

MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY

| | | | | |
|-----------------------|-----------------------------|------------------------------|-------------------------------|-----------------------------|
| Frequency (Hz) | 100 ≤ Freq. < 120 | 120 ≤ Freq. < 200 | 200 ≤ Freq. < 300 | 300 ≤ Freq. < 500 |
| Coefficient K_f | 0.15 | 0.15 | 0.20 | 0.25 |
| Frequency (Hz) | 500 ≤ Freq. < 1k | 1k ≤ Freq. < 2k | 2k ≤ Freq. < 3k | 3k ≤ Freq. < 5k |
| Coefficient K_f | 0.35 | 0.45 | 0.55 | 0.60 |
| Frequency (Hz) | 5k ≤ Freq. < 10k | 10k ≤ Freq. < 15k | 15k ≤ Freq. < 20k | 20k ≤ Freq. < 40k |
| Coefficient K_f | 0.65 | 0.70 | 0.75 | 0.75 |
| Frequency (Hz) | 40k ≤ Freq. < 50k | 50k ≤ Freq. < 100k | 100k ≤ Freq. < 500k | 500k ≤ Freq. < 1M |
| Coefficient K_f | 0.80 | 0.85 | 1.00 | 1.05 |

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our “General Precautions and Guidelines” as well as our “Packaging Information”. Please refer to the following links in the table.

| | |
|------------------------------------|----------------------------------|
| | |
| General Precautions and Guidelines | Packaging Information Hybrid SMD |
| Page 96 | Page 81 |

DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).

Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.

For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.

For further information, please visit our website www.capxongroup.com or contact CapXon directly.

AN SERIES ▀ LONG LIFE AT 135°C

KEY FEATURES



AEC-Q200



SHOCK VIBRATION



TEMPERATURE HIGH


- HYBRID CONDUCTIVE POLYMER • SMD type
- Endurance: 135°C • 4 000 hours
- Low ESR and high ripple current
- Vibration Proof (VP) version (up to 30g) available
- AEC-Q200 version available



SPECIFICATIONS

| Items | | Performance Characteristics |
|--|----------------|---|
| Operating Temperature Range | | -55 ~ +135°C |
| Rated Voltage Range | V_R | 16 ~ 100V DC |
| Surge Voltage | V_S | ($V_R \leq 100V$): $V_S = 1.25 \cdot V_R$ |
| Capacitance Range | C_R | 10 ~ 820 μ F |
| Cap. Tolerance | ΔC | $\pm 20\%$ (120Hz • 20°C) |
| Leakage Current (20°C • V_R applied) | I_{LEAK} | Not to exceed the values shown in standard ratings After 2 minutes |
| Dissipation Factor % (20°C • 120Hz) | $\tan \delta$ | Not to exceed the values shown in standard ratings |
| Equivalent Series Resistance (20°C • 100kHz) | ESR | Not to exceed the values shown in standard ratings |
| Lifetime Test | | |
| Endurance 135°C (V_R & I_R applied) | Test | 4 000 hours |
| | $\Delta C/C_R$ | Within $\pm 30\%$ of the initial value |
| | $\tan \delta$ | Less than 200% of the specified value |
| | ESR | Less than 200% of the specified value |
| | I_{Leak} | Less than the specified value |


DIMENSIONS STANDARD PACKAGE ▀ All dimensions in mm

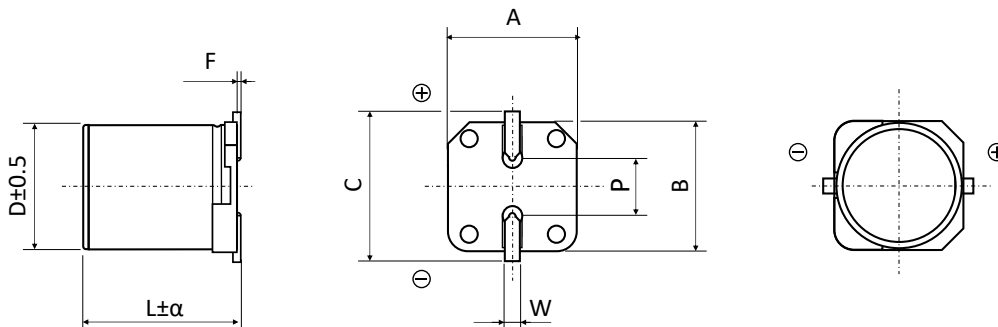

DIMENSIONS STANDARD PACKAGE ▪ All dimensions in mm

| ϕD | L | α | $A \pm 0.2$ | $B \pm 0.2$ | $C \pm 0.2$ | F | $P \pm 0.2$ | W |
|----------|------|----------|-------------|-------------|-------------|----------|-------------|------------|
| 5.0 | 5.8 | 0.3 | 5.3 | 5.3 | 5.9 | 0 to 0.3 | 1.4 | 0.5 to 0.8 |
| 6.3 | 5.8 | 0.3 | 6.6 | 6.6 | 7.2 | 0 to 0.3 | 2.2 | 0.5 to 0.8 |
| 6.3 | 7.7 | 0.3 | 6.6 | 6.6 | 7.2 | 0 to 0.3 | 2.2 | 0.5 to 0.8 |
| 8.0 | 10.5 | 0.3 | 8.3 | 8.3 | 9.0 | 0 to 0.3 | 3.1 | 0.7 to 1.1 |
| 8.0 | 11.7 | 0.3 | 8.3 | 8.3 | 9.0 | 0 to 0.3 | 3.1 | 0.7 to 1.1 |
| 10.0 | 10.5 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 0.7 to 1.1 |
| 10.0 | 12.4 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 1.0 to 1.4 |


DIMENSIONS VP PACKAGE (VIBRATION-PROOF) Ø D6.3 ▪ All dimensions in mm

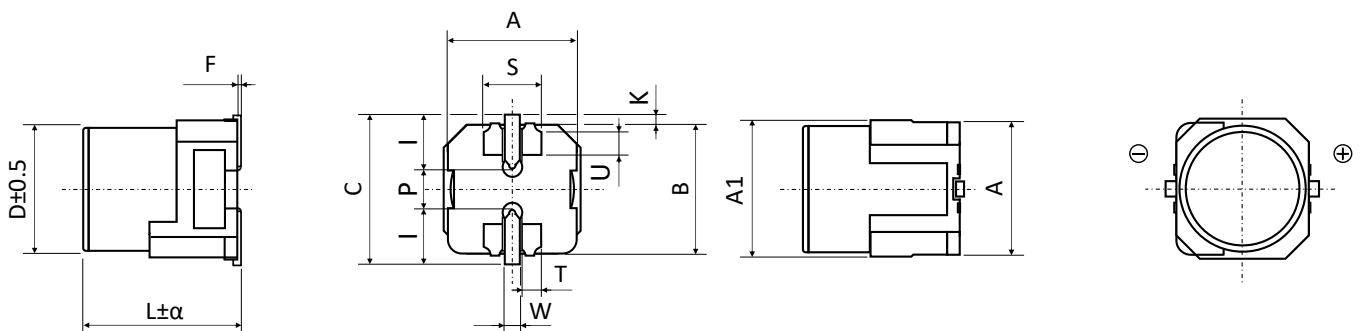

| ϕD | L | α | $A \pm 0.2$ | A1 (max.) | $B \pm 0.2$ | C (max.) | F | K |
|----------|-----|-----------|-------------|-----------|-------------|----------|-----------|--------------------|
| 6.3 | 5.8 | -0.3/+0.7 | 6.6 | 7.1 | 6.6 | 7.8 | 0 to 0.15 | 0.35 +0.15/-0.2 |
| 6.3 | 7.7 | -0.3/+0.7 | 6.6 | 7.1 | 6.6 | 7.8 | 0 to 0.15 | 0.35 +0.15/-0.2 |

| ϕD | L | $P \pm 0.2$ | $S \pm 0.1$ | $I \pm 0.1$ | $T \pm 0.1$ | $U \pm 0.1$ | $W \pm 0.1$ |
|----------|-----|-------------|-------------|-------------|-------------|-------------|-------------|
| 6.3 | 5.8 | 2.2 | 2.9 | 2.4 | 1.1 | 1.55 | 0.65 |
| 6.3 | 7.7 | 2.2 | 2.9 | 2.4 | 1.1 | 1.55 | 0.65 |

DIMENSIONS VP PACKAGE (VIBRATION-PROOF) Ø D8 and D10 ▪ All dimensions in mm

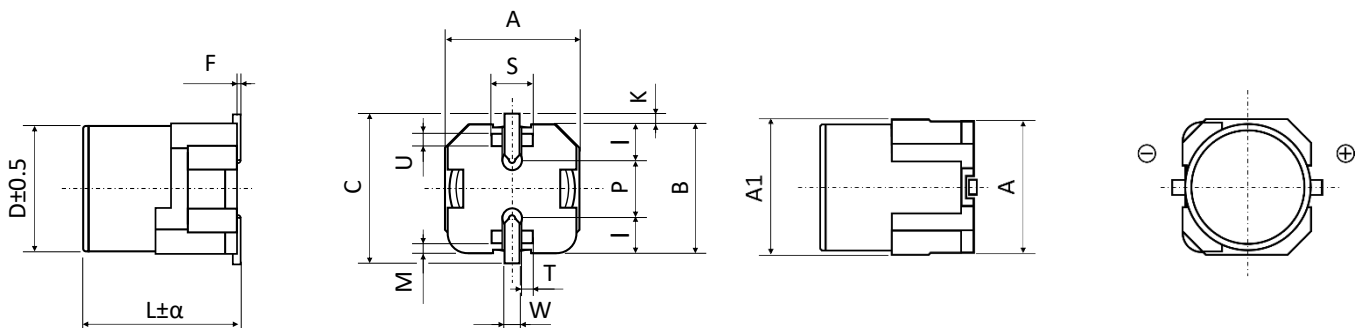

DIMENSIONS VP PACKAGE (VIBRATION-PROOF) Ø D8 and D10 ▪ All dimensions in mm

| ø D | L | α | A ± 0.2 | A1 (max.) | B ± 0.2 | C (max.) | F | K ± 0.2 |
|------|------|-----------|---------|-----------|---------|----------|-----------|---------|
| 8.0 | 10.5 | -0.3/+0.7 | 8.3 | 8.8 | 8.3 | 10.0 | 0 to 0.15 | 0.7 |
| 8.0 | 11.7 | -0.3/+0.7 | 8.3 | 8.8 | 8.3 | 10.0 | 0 to 0.15 | 0.7 |
| 10.0 | 10.5 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |
| 10.0 | 12.4 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |

| ø D | L | P ± 0.2 | S ± 0.1 | I ± 0.1 | T ± 0.1 | U ± 0.1 | W ± 0.1 | M ± 0.1 |
|------|------|---------|---------|---------|---------|---------|---------|---------|
| 8.0 | 10.5 | 3.1 | 3 | 3.4 | 1.4 | 0.7 | 1.2 | 0.7 |
| 8.0 | 11.7 | 3.1 | 3 | 3.4 | 1.4 | 0.7 | 1.2 | 0.7 |
| 10.0 | 10.5 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |
| 10.0 | 12.4 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |

STANDARD RATINGS

Part number shows blister tape on paper reel

| V _R (V) | | | C _R (µF) | ø D (mm) | L (mm) | I _{LEAK} (µA, 2min) | tanδ +20°C ▪ 120Hz (%) | Max. ESR +20°C ▪ 100kHz (mΩ) | I _R ▪ Max. Ripple Cur- rent +135°C ▪ 100kHz (mA rms) | CapXon Part Number |
|-----------------------|----------|-----------------|------------------------|-------------|-----------|------------------------------------|---------------------------------|---------------------------------------|--|--------------------|
| | Standard | Vibration-proof | | | | | | | | |
| 16 | • | • | 100 | 6.3 | 5.8 | 16.0 | 16 | 50 | 900 | AN101M016E058PTR |
| | • | • | 120 | 6.3 | 5.8 | 19.2 | 16 | 50 | 900 | AN121M016E058PTR |
| | • | • | 150 | 6.3 | 5.8 | 24.0 | 16 | 50 | 900 | AN151M016E058PTR |
| | • | • | 220 | 6.3 | 7.7 | 35.2 | 16 | 30 | 1400 | AN221M016E077PTR |
| | • | • | 270 | 6.3 | 7.7 | 43.2 | 16 | 30 | 1700 | AN271M016E077PTR |
| | • | • | 330 | 10 | 10.5 | 52.8 | 16 | 20 | 2000 | AN331M016G105PTR |
| | • | • | 470 | 8 | 10.5 | 75.2 | 16 | 27 | 1600 | AN471M016F105PTR |
| | • | • | 470 | 10 | 10.5 | 75.2 | 16 | 20 | 2000 | AN471M016G105PTR |
| | • | • | 560 | 8 | 11.7 | 89.6 | 16 | 23 | 1650 | AN561M016F117PTR |
| | • | • | 560 | 10 | 10.5 | 89.6 | 16 | 20 | 2000 | AN561M016G105PTR |
| 25 | • | • | 33 | 5 | 5.8 | 8.3 | 14 | 80 | 550 | AN330M025C058PTR |
| | • | • | 56 | 6.3 | 5.8 | 14.0 | 14 | 50 | 900 | AN560M025E058PTR |
| | • | • | 100 | 6.3 | 7.7 | 25.0 | 14 | 30 | 1400 | AN101M025E077PTR |
| | • | • | 220 | 8 | 10.5 | 55.0 | 14 | 27 | 1600 | AN221M025F105PTR |
| | • | • | 270 | 8 | 11.7 | 67.5 | 14 | 25 | 1650 | AN271M025F117PTR |
| | • | • | 330 | 10 | 10.5 | 82.5 | 14 | 20 | 2000 | AN331M025G105PTR |
| | • | • | 470 | 10 | 12.4 | 117.5 | 14 | 16 | 2260 | AN471M025G124PTR |
| 35 | • | • | 22 | 5 | 5.8 | 7.7 | 12 | 100 | 550 | AN220M035C058PTR |
| | • | • | 47 | 6.3 | 5.8 | 16.5 | 12 | 60 | 900 | AN470M035E058PTR |
| | • | • | 68 | 6.3 | 7.7 | 23.8 | 12 | 35 | 1400 | AN680M035E077PTR |
| | • | • | 100 | 8 | 10.5 | 35.0 | 12 | 27 | 1600 | AN101M035F105PTR |
| | • | • | 150 | 8 | 10.5 | 52.5 | 12 | 27 | 1600 | AN151M035F105PTR |
| | • | • | 180 | 8 | 11.7 | 63.0 | 12 | 25 | 1650 | AN181M035F117PTR |
| | • | • | 270 | 10 | 10.5 | 94.5 | 12 | 20 | 2000 | AN271M035G105PTR |
| | • | • | 330 | 10 | 12.4 | 115.5 | 12 | 17 | 2260 | AN331M035G124PTR |

see description at end of standard ratings

STANDARD RATINGS

Part number shows blister tape on paper reel

| V _R (V) | Standard | Vibration-proof | C _R (μF) | ∅ D (mm) | L (mm) | I _{LEAK} (μA, 2min) | tanδ +20°C · 120Hz (%) | Max. ESR +20°C · 100kHz (mΩ) | I _R - Max. Ripple Current +135°C · 100kHz (mA rms) | CapXon Part Number |
|--------------------|----------|-----------------|---------------------|----------|--------|------------------------------|------------------------|------------------------------|---|---------------------|
| 50 | • | | 10 | 5 | 5.8 | 5.0 | 10 | 120 | 500 | AN100M050C058PTR □□ |
| | • | • | 22 | 6.3 | 5.8 | 11.0 | 10 | 80 | 750 | AN220M050E058PTR □□ |
| | • | • | 33 | 6.3 | 7.7 | 16.5 | 10 | 40 | 1100 | AN330M050E077PTR □□ |
| | • | • | 56 | 10 | 10.5 | 28.0 | 10 | 28 | 1600 | AN560M050G105PTR □□ |
| | • | • | 68 | 8 | 10.5 | 34.0 | 10 | 30 | 1250 | AN680M050F105PTR □□ |
| | • | • | 82 | 8 | 11.7 | 41.0 | 10 | 28 | 1300 | AN820M050F117PTR □□ |
| | • | • | 100 | 10 | 10.5 | 50.0 | 10 | 28 | 1600 | AN101M050G105PTR □□ |
| | • | • | 120 | 10 | 10.5 | 60.0 | 10 | 28 | 1600 | AN121M050G105PTR □□ |
| 63 | • | • | 10 | 6.3 | 5.8 | 6.3 | 8 | 120 | 700 | AN100M063E058PTR □□ |
| | • | • | 22 | 6.3 | 7.7 | 13.9 | 8 | 80 | 900 | AN220M063E077PTR □□ |
| | • | • | 33 | 8 | 10.5 | 20.8 | 8 | 40 | 1100 | AN330M063F105PTR □□ |
| | • | • | 47 | 8 | 10.5 | 29.6 | 8 | 40 | 1100 | AN470M063F105PTR □□ |
| | • | • | 47 | 8 | 11.7 | 29.6 | 8 | 38 | 1130 | AN470M063F117PTR □□ |
| | • | • | 56 | 10 | 10.5 | 35.3 | 8 | 30 | 1400 | AN560M063G105PTR □□ |
| | • | • | 68 | 10 | 10.5 | 42.8 | 8 | 30 | 1400 | AN680M063G105PTR □□ |
| | • | • | 82 | 10 | 12.4 | 51.7 | 8 | 22 | 1650 | AN820M063G124PTR □□ |
| 80 | • | • | 22 | 8 | 10.5 | 17.6 | 8 | 45 | 1050 | AN220M080F105PTR □□ |
| | • | • | 27 | 8 | 11.7 | 21.6 | 8 | 43 | 1080 | AN270M080F117PTR □□ |
| | • | • | 33 | 10 | 10.5 | 26.4 | 8 | 36 | 1360 | AN330M080G105PTR □□ |
| | • | • | 47 | 10 | 10.5 | 37.6 | 8 | 36 | 1360 | AN470M080G105PTR □□ |
| | • | • | 56 | 10 | 12.4 | 44.8 | 8 | 35 | 1440 | AN560M080G124PTR □□ |
| | • | • | 68 | 10 | 12.4 | 54.4 | 8 | 32 | 1540 | AN680M080G124PTR □□ |
| 100 | • | • | 22 | 8 | 10.5 | 22.0 | 8 | 55 | 950 | AN220M100F105PTR □□ |
| | • | • | 22 | 8 | 11.7 | 22.0 | 8 | 52 | 980 | AN220M100F117PTR □□ |
| | • | • | 22 | 10 | 10.5 | 22.0 | 8 | 45 | 1200 | AN220M100G105PTR □□ |
| | • | • | 27 | 10 | 12.4 | 27.0 | 8 | 40 | 1360 | AN270M100G124PTR □□ |
| | • | • | 33 | 10 | 12.4 | 33.0 | 8 | 40 | 1360 | AN330M100G124PTR □□ |

□□: Leave **blank** for Standard package
 □□: Enter **W** for Vibration proof version

□□: Enter **X** for AEC-Q200
 □□: Enter **XW** for AEC-Q200 and Vibration proof version

MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY

| | | | | |
|-----------------------|-----------------------------|------------------------------|-------------------------------|-----------------------------|
| Frequency (Hz) | 100 ≤ Freq. < 120 | 120 ≤ Freq. < 200 | 200 ≤ Freq. < 300 | 300 ≤ Freq. < 500 |
| Coefficient K_f | 0.15 | 0.15 | 0.20 | 0.25 |
| Frequency (Hz) | 500 ≤ Freq. < 1k | 1k ≤ Freq. < 2k | 2k ≤ Freq. < 3k | 3k ≤ Freq. < 5k |
| Coefficient K_f | 0.30 | 0.40 | 0.45 | 0.55 |
| Frequency (Hz) | 5k ≤ Freq. < 10k | 10k ≤ Freq. < 15k | 15k ≤ Freq. < 20k | 20k ≤ Freq. < 40k |
| Coefficient K_f | 0.60 | 0.70 | 0.75 | 0.80 |
| Frequency (Hz) | 40k ≤ Freq. < 50k | 50k ≤ Freq. < 100k | 100k ≤ Freq. < 500k | 500k ≤ Freq. < 1M |
| Coefficient K_f | 0.85 | 0.90 | 1.00 | 1.00 |

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our “General Precautions and Guidelines” as well as our “Packaging Information”. Please refer to the following links in the table.

| | |
|------------------------------------|----------------------------------|
| | |
| General Precautions and Guidelines | Packaging Information Hybrid SMD |
| Page 96 | Page 81 |

DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).

Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.

For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.


For further information, please visit our website www.capxongroup.com or contact CapXon directly.

AU SERIES ▀ HIGH RIPPLE CURRENT TYPE

KEY FEATURES




- **HYBRID CONDUCTIVE POLYMER • SMD type**
- Endurance: 135°C • 4 000 hours
- Ultra-low ESR and highest ripple current
- Vibration Proof (VP) version (up to 30g) available
- AEC-Q200 version available

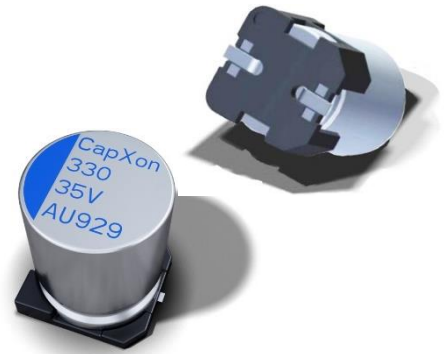

SPECIFICATIONS


| Items | | Performance Characteristics |
|--|----------------|---|
| Operating Temperature Range | | -55 ~ +135°C |
| Rated Voltage Range | V_R | 25 ~ 100V DC |
| Surge Voltage | V_S | ($V_R \leq 100V$): $V_S = 1.25 \cdot V_R$ |
| Capacitance Range | C_R | 22 ~ 680 μ F |
| Cap. Tolerance | ΔC | $\pm 20\%$ (120Hz • 20°C) |
| Leakage Current (20°C • V_R applied) | I_{LEAK} | Not to exceed the values shown in standard ratings After 2 minutes |
| Dissipation Factor % (20°C • 120Hz) | $\tan\delta$ | Not to exceed the values shown in standard ratings |
| Equivalent Series Resistance (20°C • 100kHz) | ESR | Not to exceed the values shown in standard ratings |
| Lifetime Test | | |
| Endurance 135°C (V_R & I_R applied) | Test | 4 000 hours |
| | $\Delta C/C_R$ | Within $\pm 30\%$ of the initial value |
| | $\tan\delta$ | Less than 200% of the specified value |
| | ESR | Less than 200% of the specified value |
| | I_{Leak} | Less than the specified value |

DIMENSIONS STANDARD PACKAGE ▀ All dimensions in mm

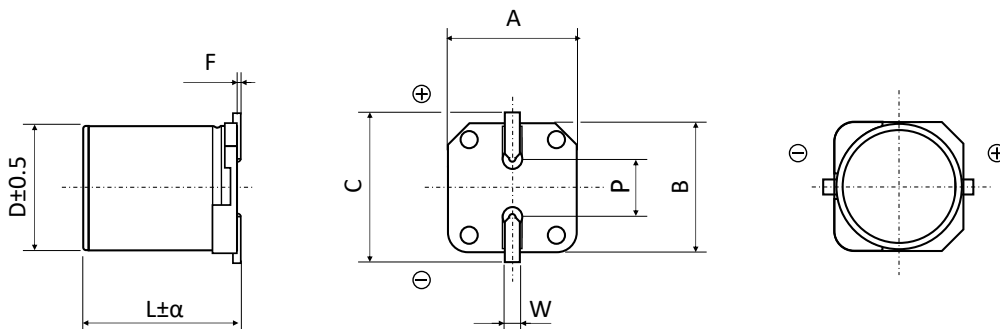

| ϕD | L | α | $A \pm 0.2$ | $B \pm 0.2$ | $C \pm 0.2$ | F | $P \pm 0.2$ | W |
|----------|------|----------|-------------|-------------|-------------|----------|-------------|------------|
| 10 | 12.4 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 1.0 to 1.4 |
| 10 | 16.5 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 1.0 to 1.4 |

DIMENSIONS VP PACKAGE (VIBRATION PROOF) Ø D10 • All dimensions in mm

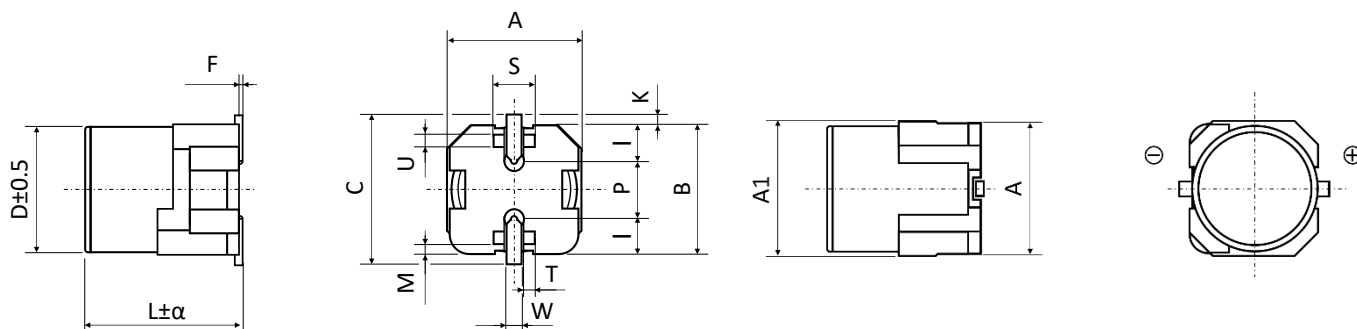

| Ø D | L | α | A ± 0.2 | A1 (max.) | B ± 0.2 | C (max.) | F | K ± 0.2 |
|-----|------|-----------------------------------|---------|-----------|---------|----------|-----------|-----------|
| 10 | 12.4 | ^{-0.3} / _{+0.7} | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 ± 0.2 |
| 10 | 16.5 | ^{-0.3} / _{+0.7} | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 ± 0.2 |

| Ø D | L | P ± 0.2 | S ± 0.1 | I ± 0.1 | T ± 0.1 | U ± 0.1 | W ± 0.1 | M ± 0.1 |
|-----|------|---------|---------|---------|---------|---------|---------|---------|
| 10 | 12.4 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |
| 10 | 16.5 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |

STANDARD RATINGS

Part number shows blister tape on paper reel

| V _R (V) | Standard | Vibration-proof | C _R (µF) | Ø D (mm) | L (mm) | I _{LEAK} (µA, 2min) | tanδ +20°C • 120Hz (%) | Max. ESR +20°C • 100kHz (mΩ) | I _R • Max. Ripple Current • 100kHz (mA rms) | | CapXon Part Number |
|-----------------------|----------|-----------------|------------------------|-------------|-----------|------------------------------------|---------------------------------|---------------------------------------|---|--------|---------------------|
| | | | | | | | | | +125°C | +135°C | |
| 25 | • | • | 470 | 10 | 12.4 | 117.5 | 14 | 10 | 5000 | 3500 | AU471M025G124PTR □□ |
| | • | • | 560 | 10 | 16.5 | 140 | 14 | 8 | 5800 | 4000 | AU561M025G165PTR □□ |
| | • | • | 680 | 10 | 16.5 | 170 | 14 | 8 | 5800 | 4000 | AU681M025G165PTR □□ |
| 35 | • | • | 330 | 10 | 12.4 | 115.5 | 12 | 11 | 4800 | 3300 | AU331M035G124PTR □□ |
| | • | • | 470 | 10 | 16.5 | 164.5 | 12 | 9 | 5500 | 3800 | AU471M035G165PTR □□ |
| 50 | • | • | 68 | 10 | 12.4 | 34 | 10 | 15 | 4000 | 2800 | AU680M050G124PTR □□ |
| | • | • | 100 | 10 | 12.4 | 50 | 10 | 15 | 4000 | 2800 | AU101M050G124PTR □□ |
| | • | • | 120 | 10 | 12.4 | 60 | 10 | 12 | 4600 | 3200 | AU121M050G124PTR □□ |
| | • | • | 150 | 10 | 12.4 | 75 | 10 | 12 | 4600 | 3200 | AU151M050G124PTR □□ |
| | • | • | 180 | 10 | 16.5 | 90 | 10 | 10 | 5200 | 3600 | AU181M050G165PTR □□ |
| | • | • | 220 | 10 | 16.5 | 110 | 10 | 10 | 5200 | 3600 | AU221M050G165PTR □□ |
| 63 | • | • | 47 | 10 | 12.4 | 29.6 | 8 | 15 | 4000 | 2800 | AU470M063G124PTR □□ |
| | • | • | 56 | 10 | 12.4 | 35.3 | 8 | 15 | 4000 | 2800 | AU560M063G124PTR □□ |
| | • | • | 68 | 10 | 12.4 | 42.8 | 8 | 15 | 4000 | 2800 | AU680M063G124PTR □□ |
| | • | • | 100 | 10 | 12.4 | 63.0 | 8 | 12 | 4600 | 3200 | AU101M063G124PTR □□ |
| | • | • | 120 | 10 | 12.4 | 75.6 | 8 | 12 | 4600 | 3200 | AU121M063G124PTR □□ |
| | • | • | 150 | 10 | 16.5 | 94.5 | 8 | 10 | 5200 | 3600 | AU151M063G165PTR □□ |

□ see description at end of standard ratings

STANDARD RATINGS

Part number shows blister tape on paper reel

| V _R (V) | Standard | Vibration-proof | C _R (μF) | ø D (mm) | L (mm) | I _{LEAK} (μA, 2min) | tanδ +20°C ▪ 120Hz (%) | Max. ESR +20°C ▪ 100kHz (mΩ) | I _r - Max. Ripple Current ▪ 100kHz (mA rms) | | CapXon Part Number |
|-----------------------|----------|-----------------|------------------------|-------------|-----------|------------------------------------|---------------------------------|---------------------------------------|---|--------|--|
| | | | | | | | | | +125°C | +135°C | |
| 80 | • | • | 47 | 10 | 12.4 | 37.6 | 8 | 18 | 3600 | 2500 | AU470M080G124PTR <input type="checkbox"/> <input type="checkbox"/> |
| | • | • | 56 | 10 | 12.4 | 44.8 | 8 | 15 | 3600 | 2500 | AU560M080G124PTR <input type="checkbox"/> <input type="checkbox"/> |
| | • | • | 68 | 10 | 12.4 | 54.5 | 8 | 15 | 4000 | 2800 | AU680M080G124PTR <input type="checkbox"/> <input type="checkbox"/> |
| | • | • | 100 | 10 | 16.5 | 80 | 8 | 12 | 4700 | 3300 | AU101M080G165PTR <input type="checkbox"/> <input type="checkbox"/> |
| 100 | • | • | 22 | 10 | 12.4 | 22 | 8 | 25 | 3000 | 2100 | AU220M100G124PTR <input type="checkbox"/> <input type="checkbox"/> |
| | • | • | 33 | 10 | 12.4 | 33 | 8 | 20 | 3400 | 2400 | AU330M100G124PTR <input type="checkbox"/> <input type="checkbox"/> |
| | • | • | 47 | 10 | 16.5 | 47 | 8 | 15 | 4100 | 2900 | AU470M100G165PTR <input type="checkbox"/> <input type="checkbox"/> |

: Leave **blank** for Standard package
: Enter **W** for Vibration proof version

: Enter **X** for AEC-Q200
: Enter **XW** for AEC-Q200 and Vibration proof version

MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY

| | | | | |
|----------------------------|-------------------|--------------------|---------------------|-------------------|
| Frequency (Hz) | 100 ≤ Freq. < 120 | 120 ≤ Freq. < 200 | 200 ≤ Freq. < 300 | 300 ≤ Freq. < 500 |
| Coefficient K _f | 0.15 | 0.15 | 0.20 | 0.25 |
| Frequency (Hz) | 500 ≤ Freq. < 1k | 1k ≤ Freq. < 2k | 2k ≤ Freq. < 3k | 3k ≤ Freq. < 5k |
| Coefficient K _f | 0.30 | 0.40 | 0.45 | 0.55 |
| Frequency (Hz) | 5k ≤ Freq. < 10k | 10k ≤ Freq. < 15k | 15k ≤ Freq. < 20k | 20k ≤ Freq. < 40k |
| Coefficient K _f | 0.60 | 0.70 | 0.75 | 0.80 |
| Frequency (Hz) | 40k ≤ Freq. < 50k | 50k ≤ Freq. < 100k | 100k ≤ Freq. < 500k | 500k ≤ Freq. < 1M |
| Coefficient K _f | 0.85 | 0.90 | 1.00 | 1.00 |

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our “General Precautions and Guidelines” as well as our “Packaging Information”. Please refer to the following links in the table.

| | |
|---|---|
| | |
| General Precautions and Guidelines Page 96 | Packaging Information Hybrid SMD Page 81 |

DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).

Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.

For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.

For further information, please visit our website www.capxongroup.com or contact CapXon directly.

AR SERIES ▀ HIGH TEMPERATURE TYPE 145°C

KEY FEATURES




- HYBRID CONDUCTIVE POLYMER • SMD type
- Endurance: 145°C • 2 000 hours
- Low ESR and high ripple current
- Vibration-proof (VP) version (up to 30g) available
- AEC-Q200 version available



SPECIFICATIONS


| Items | | Performance Characteristics |
|--|----------------|---|
| Operating Temperature Range | | -55 ~ +145°C |
| Rated Voltage Range | V_R | 16 ~ 80V DC |
| Surge Voltage | V_S | ($V_R \leq 100V$): $V_S = 1.25 \cdot V_R$ |
| Capacitance Range | C_R | 22 ~ 560 μ F |
| Cap. Tolerance | ΔC | $\pm 20\%$ (120Hz • 20°C) |
| Leakage Current (20°C • V_R applied) | I_{LEAK} | Not to exceed the values shown in standard ratings After 2 minutes |
| Dissipation Factor % (20°C • 120Hz) | $\tan\delta$ | Not to exceed the values shown in standard ratings |
| Equivalent Series Resistance (20°C • 100kHz) | ESR | Not to exceed the values shown in standard ratings |
| Lifetime Test | | |
| Endurance 145°C (V_R & I_R applied) | Test | 2 000 hours |
| | $\Delta C/C_R$ | Within $\pm 30\%$ of the initial value |
| | $\tan\delta$ | Less than 200% of the specified value |
| | ESR | Less than 200% of the specified value |
| | I_{Leak} | Less than the specified value |

DIMENSIONS STANDARD PACKAGE ▀ All dimensions in mm

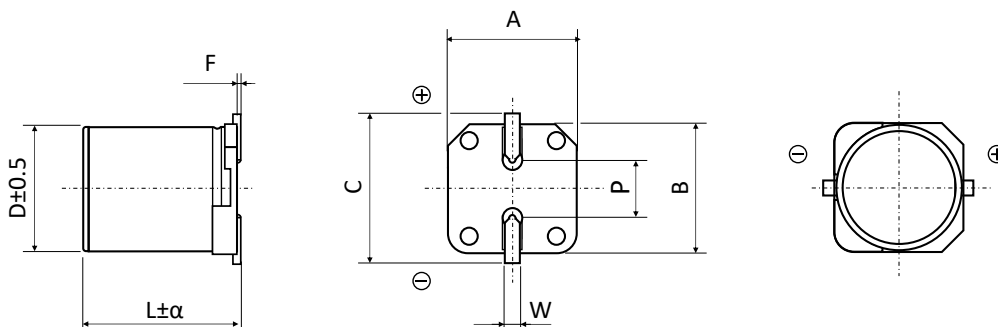

DIMENSIONS STANDARD PACKAGE ▀ All dimensions in mm

| ϕD | L | α | $A \pm 0.2$ | $B \pm 0.2$ | $C \pm 0.2$ | F | $P \pm 0.2$ | W |
|----------|------|----------|-------------|-------------|-------------|----------|-------------|------------|
| 8.0 | 10.5 | 0.3 | 8.3 | 8.3 | 9.0 | 0 to 0.3 | 3.1 | 0.7 to 1.1 |
| 8.0 | 11.7 | 0.3 | 8.3 | 8.3 | 9.0 | 0 to 0.3 | 3.1 | 0.7 to 1.1 |
| 10.0 | 10.5 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 0.7 to 1.1 |
| 10.0 | 12.4 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 1.0 to 1.4 |

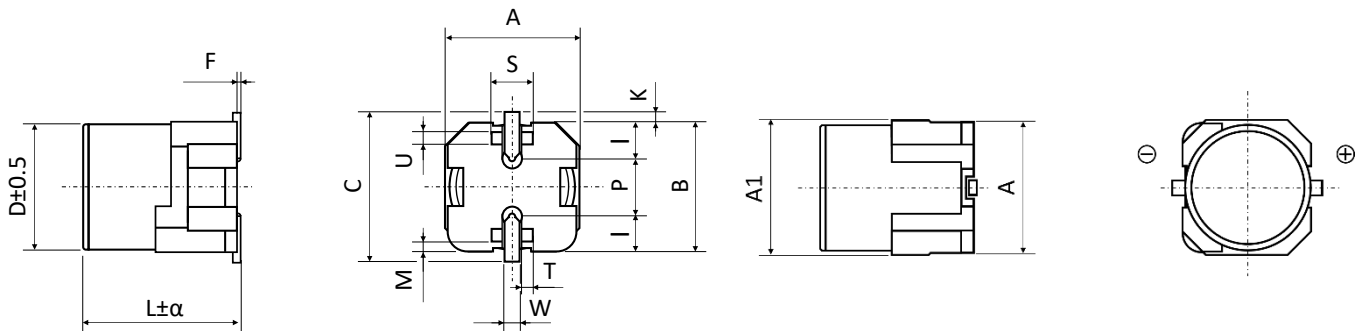DIMENSIONS VP PACKAGE (VIBRATION-PROOF) $\phi D8$ and $D10$ ▀ All dimensions in mm

DIMENSIONS VP PACKAGE (VIBRATION-PROOF) $\phi D8$ and $D10$ ▀ All dimensions in mm

| ϕD | L | α | $A \pm 0.2$ | $A1$ (max.) | $B \pm 0.2$ | C (max.) | F | $K \pm 0.2$ |
|----------|------|-----------|-------------|-------------|-------------|------------|-----------|-------------|
| 8.0 | 10.5 | -0.3/+0.7 | 8.3 | 8.8 | 8.3 | 10.0 | 0 to 0.15 | 0.7 |
| 8.0 | 11.7 | -0.3/+0.7 | 8.3 | 8.8 | 8.3 | 10.0 | 0 to 0.15 | 0.7 |
| 10.0 | 10.5 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |
| 10.0 | 12.4 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |

| ϕD | L | $P \pm 0.2$ | $S \pm 0.1$ | $I \pm 0.1$ | $T \pm 0.1$ | $U \pm 0.1$ | $W \pm 0.1$ | $M \pm 0.1$ |
|----------|------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| 8.0 | 10.5 | 3.1 | 3 | 3.4 | 1.4 | 0.7 | 1.2 | 0.7 |
| 8.0 | 11.7 | 3.1 | 3 | 3.4 | 1.4 | 0.7 | 1.2 | 0.7 |
| 10.0 | 10.5 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |
| 10.0 | 12.4 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |

STANDARD RATINGS

Part number shows blister tape on paper reel

| V _R (V) | Standard | Vibration-proof | C _R (μF) | ø D (mm) | L (mm) | I _{LEAK} (μA, 2min) | tanδ +20°C - 120Hz (%) | Max. ESR +20°C - 100kHz (mΩ) | I _R - Max. Ripple Current +145°C - 100kHz (mA rms) | CapXon Part Number |
|--------------------|----------|-----------------|---------------------|----------|--------|------------------------------|------------------------|------------------------------|---|---------------------|
| 16 | • | • | 270 | 8 | 10.5 | 43.2 | 16 | 27 | 700 | AR271M016F105PTR □□ |
| | • | • | 330 | 8 | 10.5 | 52.8 | 16 | 25 | 770 | AR331M016F105PTR □□ |
| | • | • | 470 | 10 | 10.5 | 75.2 | 16 | 20 | 900 | AR471M016G105PTR □□ |
| | • | • | 560 | 10 | 12.4 | 89.6 | 16 | 16 | 1050 | AR561M016G124PTR □□ |
| 25 | • | • | 220 | 8 | 10.5 | 55.0 | 14 | 27 | 700 | AR221M025F105PTR □□ |
| | • | • | 270 | 8 | 11.7 | 67.5 | 14 | 25 | 770 | AR271M025F117PTR □□ |
| | • | • | 330 | 10 | 10.5 | 82.5 | 14 | 20 | 900 | AR331M025G105PTR □□ |
| | • | • | 470 | 10 | 12.4 | 117.5 | 14 | 16 | 1050 | AR471M025G124PTR □□ |
| 35 | • | • | 100 | 8 | 10.5 | 35.0 | 12 | 27 | 700 | AR101M035F105PTR □□ |
| | • | • | 150 | 8 | 10.5 | 52.5 | 12 | 27 | 700 | AR151M035F105PTR □□ |
| | • | • | 180 | 8 | 11.7 | 63.0 | 12 | 25 | 770 | AR181M035F117PTR □□ |
| | • | • | 270 | 10 | 10.5 | 94.5 | 12 | 20 | 900 | AR271M035G105PTR □□ |
| | • | • | 330 | 10 | 12.4 | 115.5 | 12 | 17 | 1020 | AR331M035G124PTR □□ |
| 50 | • | • | 68 | 8 | 10.5 | 34.0 | 10 | 30 | 600 | AR680M050F105PTR □□ |
| | • | • | 82 | 8 | 11.7 | 41.0 | 10 | 28 | 660 | AR820M050F117PTR □□ |
| | • | • | 56 | 10 | 10.5 | 28.0 | 10 | 28 | 800 | AR560M050G105PTR □□ |
| | • | • | 100 | 10 | 10.5 | 50.0 | 10 | 28 | 800 | AR101M050G105PTR □□ |
| | • | • | 120 | 10 | 10.5 | 60.0 | 10 | 28 | 800 | AR121M050G105PTR □□ |
| | • | • | 120 | 10 | 12.4 | 60.0 | 10 | 25 | 900 | AR121M050G124PTR □□ |
| 63 | • | • | 33 | 8 | 10.5 | 20.8 | 8 | 40 | 600 | AR330M063F105PTR □□ |
| | • | • | 47 | 8 | 10.5 | 29.6 | 8 | 40 | 600 | AR470M063F105PTR □□ |
| | • | • | 47 | 8 | 11.7 | 29.6 | 8 | 38 | 650 | AR470M063F117PTR □□ |
| | • | • | 56 | 10 | 10.5 | 35.3 | 8 | 30 | 800 | AR560M063G105PTR □□ |
| | • | • | 68 | 10 | 10.5 | 42.8 | 8 | 30 | 800 | AR680M063G105PTR □□ |
| | • | • | 82 | 10 | 12.4 | 51.7 | 8 | 27 | 900 | AR820M063G124PTR □□ |
| 80 | • | • | 22 | 8 | 10.5 | 17.6 | 8 | 45 | 560 | AR220M080F105PTR □□ |
| | • | • | 27 | 8 | 11.7 | 21.6 | 8 | 43 | 580 | AR270M080F117PTR □□ |
| | • | • | 33 | 8 | 10.5 | 26.4 | 8 | 36 | 730 | AR330M080G105PTR □□ |
| | • | • | 47 | 10 | 10.5 | 37.6 | 8 | 36 | 730 | AR470M080G105PTR □□ |
| | • | • | 56 | 10 | 12.4 | 44.8 | 8 | 34 | 800 | AR560M080G124PTR □□ |
| | • | • | 68 | 10 | 12.4 | 54.4 | 8 | 34 | 800 | AR680M080G124PTR □□ |

□□: Leave **blank** for Standard package
 □□: Enter **W** for Vibration proof version

□□: Enter **X** for AEC-Q200
 □□: Enter **XW** for AEC-Q200 and Vibration proof version

MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY

| | | | | |
|-----------------------|-----------------------------|------------------------------|-------------------------------|-----------------------------|
| Frequency (Hz) | 100 ≤ Freq. < 120 | 120 ≤ Freq. < 200 | 200 ≤ Freq. < 300 | 300 ≤ Freq. < 500 |
| Coefficient K_f | 0.10 | 0.10 | 0.10 | 0.15 |
| Frequency (Hz) | 500 ≤ Freq. < 1k | 1k ≤ Freq. < 2k | 2k ≤ Freq. < 3k | 3k ≤ Freq. < 5k |
| Coefficient K_f | 0.20 | 0.30 | 0.40 | 0.45 |
| Frequency (Hz) | 5k ≤ Freq. < 10k | 10k ≤ Freq. < 15k | 15k ≤ Freq. < 20k | 20k ≤ Freq. < 40k |
| Coefficient K_f | 0.50 | 0.60 | 0.65 | 0.75 |
| Frequency (Hz) | 40k ≤ Freq. < 50k | 50k ≤ Freq. < 100k | 100k ≤ Freq. < 500k | 500k ≤ Freq. < 1M |
| Coefficient K_f | 0.80 | 0.85 | 1.00 | 1.05 |

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our “General Precautions and Guidelines” as well as our “Packaging Information”. Please refer to the following links in the table.

| | |
|------------------------------------|----------------------------------|
| | |
| General Precautions and Guidelines | Packaging Information Hybrid SMD |
| Page 96 | Page 81 |

DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).

Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.

For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.

For further information, please visit our website www.capxongroup.com or contact CapXon directly.

AP SERIES ■ HIGH TEMPERATURE TYPE 150°C

KEY FEATURES




- HYBRID CONDUCTIVE POLYMER • SMD type
- Endurance: 150°C • 1 000 hours
- Low ESR and high ripple current
- Vibration Proof (VP) version (up to 30g) available
- AEC-Q200 version available



SPECIFICATIONS

| Items | | Performance Characteristics |
|--|----------------|---|
| Operating Temperature Range | | -55 ~ +150°C |
| Rated Voltage Range | V_R | 16 ~ 80V DC |
| Surge Voltage | V_S | ($V_R \leq 100V$): $V_S = 1.25 \cdot V_R$ |
| Capacitance Range | C_R | 22 ~ 560 μ F |
| Cap. Tolerance | ΔC | $\pm 20\%$ (120Hz • 20°C) |
| Leakage Current (20°C • V_R applied) | I_{LEAK} | Not to exceed the values shown in standard ratings After 2 minutes |
| Dissipation Factor % (20°C • 120Hz) | $\tan\delta$ | Not to exceed the values shown in standard ratings |
| Equivalent Series Resistance (20°C • 100kHz) | ESR | Not to exceed the values shown in standard ratings |
| Lifetime Test | | |
| Endurance 150°C (V_R & I_R applied) | Test | 1 000 hours |
| | $\Delta C/C_R$ | Within $\pm 30\%$ of the initial value |
| | $\tan\delta$ | Less than 200% of the specified value |
| | ESR | Less than 200% of the specified value |
| | I_{Leak} | Less than the specified value |


DIMENSIONS STANDARD PACKAGE ■ All dimensions in mm

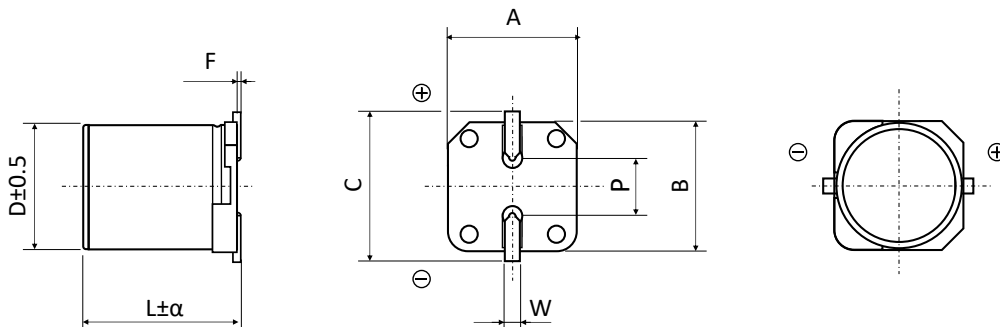

DIMENSIONS STANDARD PACKAGE ▪ All dimensions in mm

| ϕD | L | α | $A \pm 0.2$ | $B \pm 0.2$ | $C \pm 0.2$ | F | $P \pm 0.2$ | W |
|----------|------|----------|-------------|-------------|-------------|----------|-------------|------------|
| 8.0 | 10.5 | 0.3 | 8.3 | 8.3 | 9.0 | 0 to 0.3 | 3.1 | 0.7 to 1.1 |
| 8.0 | 11.7 | 0.3 | 8.3 | 8.3 | 9.0 | 0 to 0.3 | 3.1 | 0.7 to 1.1 |
| 10.0 | 10.5 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 0.7 to 1.1 |
| 10.0 | 12.4 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 1.0 to 1.4 |

DIMENSIONS VP PACKAGE (VIBRATION-PROOF) $\phi D8$ and $D10$ ▪ All dimensions in mm

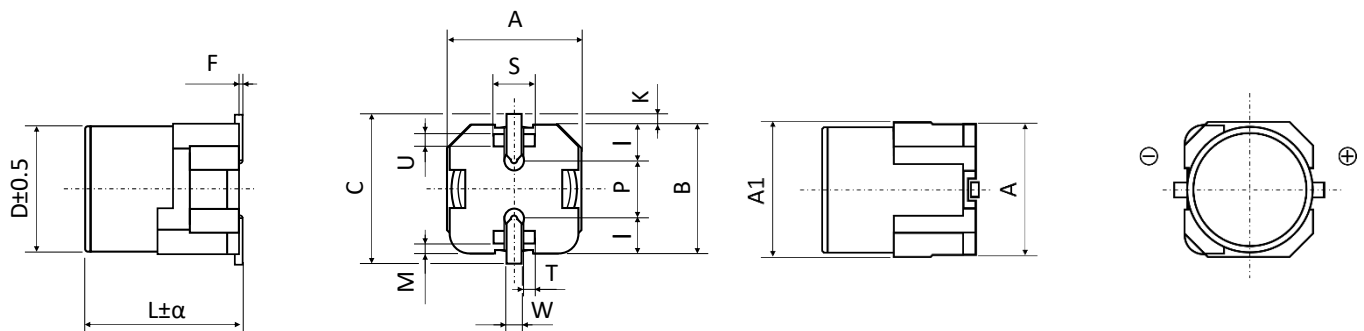

DIMENSIONS VP PACKAGE (VIBRATION-PROOF) $\phi D8$ and $D10$ ▪ All dimensions in mm

| ϕD | L | α | $A \pm 0.2$ | $A1$ (max.) | $B \pm 0.2$ | C (max.) | F | $K \pm 0.2$ |
|----------|------|-----------|-------------|-------------|-------------|------------|-----------|-------------|
| 8.0 | 10.5 | -0.3/+0.7 | 8.3 | 8.8 | 8.3 | 10.0 | 0 to 0.15 | 0.7 |
| 8.0 | 11.7 | -0.3/+0.7 | 8.3 | 8.8 | 8.3 | 10.0 | 0 to 0.15 | 0.7 |
| 10.0 | 10.5 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |
| 10.0 | 12.4 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |

| ϕD | L | $P \pm 0.2$ | $S \pm 0.1$ | $I \pm 0.1$ | $T \pm 0.1$ | $U \pm 0.1$ | $W \pm 0.1$ | $M \pm 0.1$ |
|----------|------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| 8.0 | 10.5 | 3.1 | 3 | 3.4 | 1.4 | 0.7 | 1.2 | 0.7 |
| 8.0 | 11.7 | 3.1 | 3 | 3.4 | 1.4 | 0.7 | 1.2 | 0.7 |
| 10.0 | 10.5 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |
| 10.0 | 12.4 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |

STANDARD RATINGS

Part number shows blister tape on paper reel

| V _R (V) | Standard | Vibration-proof | C _R (μF) | ø D (mm) | L (mm) | I _{LEAK} (μA, 2min) | tanδ +20°C - 120Hz (%) | Max. ESR +20°C - 100kHz (mΩ) | I _R - Max. Ripple Current +150°C - 100kHz (mA rms) | CapXon Part Number |
|--------------------|----------|-----------------|---------------------|----------|--------|------------------------------|------------------------|------------------------------|---|---------------------|
| 16 | • | • | 270 | 8 | 10.5 | 43.2 | 16 | 27 | 700 | AP271M016F105PTR □□ |
| | • | • | 330 | 8 | 10.5 | 52.8 | 16 | 25 | 770 | AP331M016F105PTR □□ |
| | • | • | 470 | 10 | 10.5 | 75.2 | 16 | 20 | 900 | AP471M016G105PTR □□ |
| | • | • | 560 | 10 | 12.4 | 89.6 | 16 | 16 | 1050 | AP561M016G124PTR □□ |
| 25 | • | • | 220 | 8 | 10.5 | 55.0 | 14 | 27 | 700 | AP221M025F105PTR □□ |
| | • | • | 270 | 8 | 11.7 | 67.5 | 14 | 25 | 770 | AP271M025F117PTR □□ |
| | • | • | 330 | 10 | 10.5 | 82.5 | 14 | 20 | 900 | AP331M025G105PTR □□ |
| | • | • | 470 | 10 | 12.4 | 117.5 | 14 | 16 | 1050 | AP471M025G124PTR □□ |
| 35 | • | • | 100 | 8 | 10.5 | 35.0 | 12 | 27 | 700 | AP101M035F105PTR □□ |
| | • | • | 150 | 8 | 10.5 | 52.5 | 12 | 27 | 700 | AP151M035F105PTR □□ |
| | • | • | 180 | 8 | 11.7 | 63.0 | 12 | 25 | 770 | AP181M035F117PTR □□ |
| | • | • | 270 | 10 | 10.5 | 94.5 | 12 | 20 | 900 | AP271M035G105PTR □□ |
| | • | • | 330 | 10 | 12.4 | 115.5 | 12 | 17 | 1020 | AP331M035G124PTR □□ |
| 50 | • | • | 56 | 10 | 10.5 | 28.0 | 10 | 28 | 800 | AP560M050G105PTR □□ |
| | • | • | 68 | 8 | 10.5 | 34.0 | 10 | 30 | 600 | AP680M050F105PTR □□ |
| | • | • | 82 | 8 | 11.7 | 41.0 | 10 | 28 | 660 | AP820M050F117PTR □□ |
| | • | • | 100 | 10 | 10.5 | 50.0 | 10 | 28 | 800 | AP101M050G105PTR □□ |
| | • | • | 120 | 10 | 10.5 | 60.0 | 10 | 28 | 800 | AP121M050G105PTR □□ |
| | • | • | 120 | 10 | 12.4 | 60.0 | 10 | 25 | 900 | AP121M050G124PTR □□ |
| 63 | • | • | 33 | 8 | 10.5 | 20.8 | 8 | 40 | 600 | AP330M063F105PTR □□ |
| | • | • | 47 | 8 | 10.5 | 29.6 | 8 | 40 | 600 | AP470M063F105PTR □□ |
| | • | • | 47 | 8 | 11.7 | 29.6 | 8 | 38 | 650 | AP470M063F117PTR □□ |
| | • | • | 56 | 10 | 10.5 | 35.3 | 8 | 30 | 800 | AP560M063G105PTR □□ |
| | • | • | 68 | 10 | 10.5 | 42.8 | 8 | 30 | 800 | AP680M063G105PTR □□ |
| | • | • | 82 | 10 | 12.4 | 51.7 | 8 | 27 | 900 | AP820M063G124PTR □□ |
| 80 | • | • | 22 | 8 | 10.5 | 17.6 | 8 | 45 | 560 | AP220M080F105PTR □□ |
| | • | • | 27 | 8 | 11.7 | 21.6 | 8 | 43 | 580 | AP270M080F117PTR □□ |
| | • | • | 33 | 8 | 10.5 | 26.4 | 8 | 36 | 730 | AP330M080G105PTR □□ |
| | • | • | 47 | 10 | 10.5 | 37.6 | 8 | 36 | 730 | AP470M080G105PTR □□ |
| | • | • | 56 | 10 | 12.4 | 44.8 | 8 | 34 | 800 | AP560M080G124PTR □□ |
| | • | • | 68 | 10 | 12.4 | 54.4 | 8 | 34 | 800 | AP680M080G124PTR □□ |

□□: Leave **blank** for Standard package
 □□: Enter **W** for Vibration proof version

□□: Enter **X** for AEC-Q200
 □□: Enter **XW** for AEC-Q200 and Vibration proof version

MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY

| | | | | |
|-----------------------|-----------------------------|------------------------------|-------------------------------|-----------------------------|
| Frequency (Hz) | 100 ≤ Freq. < 120 | 120 ≤ Freq. < 200 | 200 ≤ Freq. < 300 | 300 ≤ Freq. < 500 |
| Coefficient K_f | 0.10 | 0.10 | 0.10 | 0.15 |
| Frequency (Hz) | 500 ≤ Freq. < 1k | 1k ≤ Freq. < 2k | 2k ≤ Freq. < 3k | 3k ≤ Freq. < 5k |
| Coefficient K_f | 0.20 | 0.30 | 0.40 | 0.45 |
| Frequency (Hz) | 5k ≤ Freq. < 10k | 10k ≤ Freq. < 15k | 15k ≤ Freq. < 20k | 20k ≤ Freq. < 40k |
| Coefficient K_f | 0.50 | 0.60 | 0.65 | 0.75 |
| Frequency (Hz) | 40k ≤ Freq. < 50k | 50k ≤ Freq. < 100k | 100k ≤ Freq. < 500k | 500k ≤ Freq. < 1M |
| Coefficient K_f | 0.80 | 0.85 | 1.00 | 1.05 |

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our “General Precautions and Guidelines” as well as our “Packaging Information”. Please refer to the following links in the table.

| | |
|------------------------------------|----------------------------------|
| | |
| General Precautions and Guidelines | Packaging Information Hybrid SMD |
| Page 96 | Page 81 |

DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).


Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.

For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.

For further information, please visit our website www.capxongroup.com or contact CapXon directly.

OVERVIEW ▪ RADIAL HYBRID POLYMER CONDUCTIVE CAPACITORS



Features



| Series | Page | AEC-Q200 | High Temperature | High Voltage | Low ESR | Slim Type | Standard | Ultra Low ESR | Temperature Range (°C) | | Voltage Range (V) | | Capacitance Range (µF) | | Endurance (hours) |
|--------|------|----------|------------------|--------------|---------|-----------|----------|---------------|------------------------|------|-------------------|-----|------------------------|------|-------------------|
| | | | | | | | | | -55 | +105 | 16 | 400 | 1.2 | 1500 | |
| AS | 61 | • | | • | • | • | • | | -55 | +105 | 16 | 400 | 1.2 | 1500 | 2000 to 10000 |
| AT | 65 | • | • | | • | • | | | -55 | +125 | 16 | 100 | 8.2 | 1500 | 2000 to 4000 |
| AK | 69 | • | • | | • | | | | -55 | +135 | 16 | 100 | 8.2 | 560 | 2000 to 3000 |
| AE | 72 | • | • | | | | | • | -55 | +135 | 25 | 100 | 22 | 680 | 4000 |
| AL | 75 | • | • | | • | | | | -55 | +145 | 16 | 80 | 8.2 | 560 | 2000 |
| AM | 78 | • | • | | • | | | | -55 | +150 | 16 | 80 | 8.2 | 560 | 1000 |

AE: New Product Series

AS SERIES ■ LONG LIFE UP TO 10000 HOURS

KEY FEATURES



- HYBRID CONDUCTIVE POLYMER • THT type
- Endurance: 105°C ■ 2 000 up to 10 000 hours
- Low ESR and high ripple current
- Superior electrical stability over application lifetime
- AEC-Q200 version available




SPECIFICATIONS

| Items | | Performance Characteristics |
|--|---------------|---|
| Operating Temperature Range | | -55 ~ +105°C |
| Rated Voltage Range | V_R | 16 ~ 400V DC |
| Surge Voltage | V_S | ($V_R \leq 100V$): $V_S = 1.25 \cdot V_R$ ($V_R \geq 200V$): $V_S = 1.15 \cdot V_R$ |
| Capacitance Range | C_R | 1.2 ~ 1500 μ F |
| Cap. Tolerance | ΔC | $\pm 20\%$ (120Hz • 20°C) |
| Leakage Current (20°C • V_R applied) | I_{LEAK} | Not to exceed the values shown in standard ratings After 2 minutes |
| Dissipation Factor % (20°C • 120Hz) | $\tan \delta$ | Not to exceed the values shown in standard ratings |
| Equivalent Series Resistance (20°C • 100kHz) | ESR | Not to exceed the values shown in standard ratings |

| Lifetime Test | | | |
|--|-------------------------------|--|-----------------------------------|
| Endurance 105°C (V_R & I_R applied) | Test | 10 000 hours | $\geq \phi D 8 \cdot < 250V$ |
| | | 5 000 hours | $\leq \phi D 6.3 \cdot < 250V DC$ |
| | | 5 000 hours | 250V |
| | | 2 000 hours | 400V |
| | $\Delta C/C_R$ | Within $\pm 30\%$ of the initial value | |
| | $\tan \delta$ | Less than 200% of the specified value | |
| | ESR | Less than 200% of the specified value | |
| I_{Leak} | Less than the specified value | | |

DIMENSIONS ■ All dimensions in mm

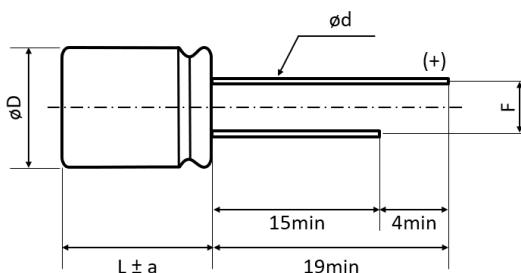

| ϕD | L | $\phi D \pm 0.5$ | a | F ± 0.5 | $\phi d \pm 0.05$ |
|----------|------|------------------|-----|-------------|-------------------|
| 6.3 | 8 | 6.3 | 1 | 2.5 | 0.6 |
| 8 | 9 | 8 | 1.5 | 3.5 | 0.6 |
| 8 | 11.5 | 8 | 1.5 | 3.5 | 0.6 |
| 10 | 10 | 10 | 1.5 | 5 | 0.6 |
| 10 | 12.5 | 10 | 1.5 | 5 | 0.8 |
| 10 | 18 | 10 | 2 | 5 | 0.8 |

STANDARD RATINGS

| V_R (V) | C_R (μ F) | ϕ D (mm) | L (mm) | I_{LEAK} (μ A, 2min) | $\tan\delta$ +20°C • 120Hz (%) | Max. ESR +20°C • 100kHz (m Ω) | I_R • Max. Ripple Current +105°C • 100kHz (mA rms) | CapXon Part Number |
|--------------|---------------------|------------------|-----------|--------------------------------|---|--|---|---|
| 16 | 120 | 6.3 | 8 | 19.2 | 16 | 40 | 1500 | AS121M016E080PTC <input type="checkbox"/> |
| | 270 | 8 | 9 | 43.2 | 16 | 26 | 2000 | AS271M016F090PTD <input type="checkbox"/> |
| | 330 | 8 | 11.5 | 52.8 | 16 | 23 | 2350 | AS331M016F115PTD <input type="checkbox"/> |
| | 470 | 10 | 10 | 75.2 | 16 | 21 | 2600 | AS471M016G100PTA <input type="checkbox"/> |
| | 560 | 10 | 12.5 | 89.6 | 16 | 15 | 3000 | AS561M016G125PTA <input type="checkbox"/> |
| | 1500 | 10 | 18 | 240.0 | 16 | 12 | 5000 | AS152M016G180PTA <input type="checkbox"/> |
| 25 | 68 | 6.3 | 8 | 17.0 | 16 | 45 | 1400 | AS680M025E080PTC <input type="checkbox"/> |
| | 150 | 8 | 9 | 37.5 | 16 | 27 | 1900 | AS151M025F090PTD <input type="checkbox"/> |
| | 220 | 8 | 11.5 | 55.0 | 16 | 24 | 2250 | AS221M025F115PTD <input type="checkbox"/> |
| | 270 | 10 | 10 | 67.5 | 16 | 22 | 2530 | AS271M025G100PTA <input type="checkbox"/> |
| | 330 | 10 | 12.5 | 82.5 | 16 | 16 | 2900 | AS331M025G125PTA <input type="checkbox"/> |
| | 1000 | 10 | 18 | 250.0 | 16 | 12 | 5000 | AS102M025G180PTA <input type="checkbox"/> |
| 35 | 47 | 6.3 | 8 | 16.5 | 16 | 60 | 1300 | AS470M035E080PTC <input type="checkbox"/> |
| | 100 | 8 | 9 | 35.0 | 16 | 30 | 1800 | AS101M035F090PTD <input type="checkbox"/> |
| | 150 | 8 | 11.5 | 52.5 | 16 | 25 | 2100 | AS151M035F115PTD <input type="checkbox"/> |
| | 150 | 10 | 10 | 52.5 | 16 | 23 | 2470 | AS151M035G100PTA <input type="checkbox"/> |
| | 220 | 10 | 12.5 | 77.0 | 16 | 17 | 2830 | AS221M035G125PTA <input type="checkbox"/> |
| | 680 | 10 | 18 | 238.0 | 16 | 14 | 4600 | AS681M035G180PTA <input type="checkbox"/> |
| 40 | 27 | 6.3 | 8 | 10.8 | 16 | 70 | 1250 | AS270M040E080PTC <input type="checkbox"/> |
| | 56 | 8 | 9 | 22.4 | 16 | 32 | 1750 | AS560M040F090PTD <input type="checkbox"/> |
| | 82 | 8 | 11.5 | 32.8 | 16 | 27 | 2000 | AS820M040F115PTD <input type="checkbox"/> |
| | 100 | 10 | 10 | 40.0 | 16 | 24 | 2400 | AS101M040G100PTA <input type="checkbox"/> |
| | 120 | 10 | 10 | 48.0 | 16 | 18 | 2750 | AS121M040G100PTA <input type="checkbox"/> |
| | 180 | 10 | 12.5 | 72.0 | 16 | 18 | 3000 | AS181M040G125PTA <input type="checkbox"/> |
| 50 | 15 | 6.3 | 8 | 7.5 | 16 | 80 | 1200 | AS150M050E080PTC <input type="checkbox"/> |
| | 33 | 8 | 9 | 16.5 | 16 | 35 | 1670 | AS330M050F090PTD <input type="checkbox"/> |
| | 47 | 8 | 11.5 | 23.5 | 16 | 30 | 1900 | AS470M050F115PTD <input type="checkbox"/> |
| | 56 | 10 | 10 | 28.0 | 16 | 25 | 2320 | AS560M050G100PTA <input type="checkbox"/> |
| | 82 | 10 | 12.5 | 41.0 | 16 | 19 | 2650 | AS820M050G125PTA <input type="checkbox"/> |
| | 220 | 10 | 18 | 110.0 | 16 | 15 | 4350 | AS221M050G180PTA <input type="checkbox"/> |
| 63 | 10 | 6.3 | 8 | 6.3 | 16 | 100 | 1060 | AS100M063E080PTC <input type="checkbox"/> |
| | 22 | 8 | 9 | 13.9 | 16 | 40 | 1560 | AS220M063F090PTD <input type="checkbox"/> |
| | 27 | 8 | 11.5 | 17.0 | 16 | 35 | 1750 | AS270M063F115PTD <input type="checkbox"/> |
| | 33 | 10 | 10 | 20.8 | 16 | 30 | 2100 | AS330M063G100PTA <input type="checkbox"/> |
| | 47 | 10 | 10 | 29.6 | 16 | 30 | 2100 | AS470M063G100PTA <input type="checkbox"/> |
| | 56 | 10 | 12.5 | 35.3 | 16 | 22 | 2400 | AS560M063G125PTA <input type="checkbox"/> |
| | 150 | 10 | 18 | 94.5 | 16 | 18 | 4000 | AS151M063G180PTA <input type="checkbox"/> |
| 80 | 8.2 | 8 | 9 | 6.6 | 16 | 90 | 1050 | AS8R2M080F115PTD <input type="checkbox"/> |
| | 15 | 8 | 11.5 | 12.0 | 16 | 70 | 1400 | AS150M080F115PTD <input type="checkbox"/> |
| | 12 | 10 | 10 | 9.6 | 16 | 70 | 1600 | AS120M080G100PTA <input type="checkbox"/> |
| | 15 | 10 | 10 | 12.0 | 16 | 70 | 1600 | AS150M080G100PTA <input type="checkbox"/> |
| | 18 | 10 | 12.5 | 14.4 | 16 | 50 | 1830 | AS180M080G125PTA <input type="checkbox"/> |

 see description at end of standard ratings

Part number shows taped version with straight leads and Ammo Pack packaging.

See "ADDITIONAL INFORMATION" for further lead treatment options.

STANDARD RATINGS

| V_R (V) | C_R (μF) | ϕD (mm) | L (mm) | I_{LEAK} (μA , 2min) | $\tan\delta$ +20°C • 120Hz (%) | Max. ESR +20°C • 100kHz (m Ω) | I_R - Max. Ripple Current +105°C • 100kHz (mA rms) | CapXon Part Number |
|--------------|----------------------|------------------|-----------|---------------------------------|---|--|---|---|
| 100 | 8.2 | 8 | 9 | 8.2 | 16 | 100 | 1000 | AS8R2M100F090PTD <input type="checkbox"/> |
| | 10 | 8 | 11.5 | 10.0 | 16 | 80 | 1300 | AS100M100F115PTD <input type="checkbox"/> |
| | 10 | 10 | 10 | 10.0 | 16 | 80 | 1450 | AS100M100G100PTA <input type="checkbox"/> |
| | 12 | 10 | 10 | 12.0 | 16 | 80 | 1450 | AS120M100G100PTA <input type="checkbox"/> |
| | 15 | 10 | 12.5 | 15.0 | 16 | 60 | 1660 | AS150M100G125PTA <input type="checkbox"/> |
| | 47 | 10 | 12.5 | 47.0 | 16 | 60 | 1660 | AS470M100G125PTA <input type="checkbox"/> |
| 250 | 8.2 | 10 | 12.5 | 20.5 | 16 | 120 | 740 | AS8R2M250G125PTA <input type="checkbox"/> |
| 400 | 1.2 | 8 | 9 | 4.8 | 16 | 200 | 430 | AS1R2M400F090PTD <input type="checkbox"/> |
| | 2.2 | 8 | 11.5 | 8.8 | 16 | 170 | 510 | AS2R2M400F115PTD <input type="checkbox"/> |
| | 4.7 | 10 | 12.5 | 18.8 | 16 | 150 | 650 | AS4R7M400G125PTA <input type="checkbox"/> |

: Leave **blank** for Standard type

: Enter **X** for AEC-Q200 type

Part number shows taped version with straight leads and Ammo Pack packaging.
See "PACKAGING INFORMATION" for further lead treatment options.
MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY

| | | | | |
|-------------------|-------------------|--------------------|---------------------|-------------------|
| Frequency (Hz) | 100 ≤ Freq. < 120 | 120 ≤ Freq. < 200 | 200 ≤ Freq. < 300 | 300 ≤ Freq. < 500 |
| Coefficient K_f | 0.10 | 0.10 | 0.10 | 0.15 |
| Frequency (Hz) | 500 ≤ Freq. < 1k | 1k ≤ Freq. < 2k | 2k ≤ Freq. < 3k | 3k ≤ Freq. < 5k |
| Coefficient K_f | 0.20 | 0.30 | 0.40 | 0.45 |
| Frequency (Hz) | 5k ≤ Freq. < 10k | 10k ≤ Freq. < 15k | 15k ≤ Freq. < 20k | 20k ≤ Freq. < 40k |
| Coefficient K_f | 0.50 | 0.60 | 0.65 | 0.70 |
| Frequency (Hz) | 40k ≤ Freq. < 50k | 50k ≤ Freq. < 100k | 100k ≤ Freq. < 500k | 500k ≤ Freq. < 1M |
| Coefficient K_f | 0.80 | 0.85 | 1.00 | 1.05 |

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our "General Precautions and Guidelines" as well as our "Packaging Information". Please refer to the following links in the table.

| | |
|------------------------------------|-------------------------------------|
| | |
| General Precautions and Guidelines | Packaging Information Hybrid Radial |
| Page 96 | Page 89 |

DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).

Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.


For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.

For further information, please visit our website www.capxongroup.com or contact CapXon directly.

AT SERIES ■ LONG LIFE AT 125°C UP TO 4 000 hours

KEY FEATURES



- HYBRID CONDUCTIVE POLYMER • THT type
- Endurance: 125°C • 2 000 up to 4 000 hours
- Low ESR and high ripple current
- Superior electrical stability over application lifetime
- AEC-Q200 version available




SPECIFICATIONS

| Items | | Performance Characteristics |
|--|--------------|---|
| Operating Temperature Range | | -55 ~ +125°C |
| Rated Voltage Range | V_R | 16 ~ 100V DC |
| Surge Voltage | V_S | ($V_R \leq 100V$): $V_S = 1.25 \cdot V_R$ |
| Capacitance Range | C_R | 8.2 ~ 1500 μ F |
| Cap. Tolerance | ΔC | $\pm 20\%$ (120Hz • 20°C) |
| Leakage Current (20°C • V_R applied) | I_{LEAK} | Not to exceed the values shown in standard ratings After 2 minutes |
| Dissipation Factor % (20°C • 120Hz) | $\tan\delta$ | Not to exceed the values shown in standard ratings |
| Equivalent Series Resistance (20°C • 100kHz) | ESR | Not to exceed the values shown in standard ratings |

| Lifetime Test | | | |
|--|----------------|--|-------------------|
| Endurance 125°C (V_R & I_R applied) | Test | 4 000 hours | $\geq \phi D 8$ |
| | | 2 000 hours | $\leq \phi D 6.3$ |
| | $\Delta C/C_R$ | Within $\pm 30\%$ of the initial value | |
| | $\tan\delta$ | Less than 200% of the specified value | |
| | ESR | Less than 200% of the specified value | |
| | I_{Leak} | Less than the specified value | |

DIMENSIONS ■ All dimensions in mm

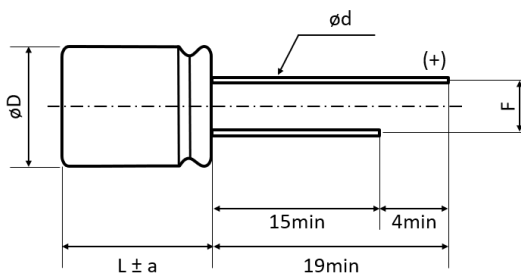

| ϕD | L | $\phi D \pm 0.5$ | a | F ± 0.5 | $\phi d \pm 0.05$ |
|----------|------|------------------|-----|-------------|-------------------|
| 6.3 | 8 | 6.3 | 1 | 2.5 | 0.6 |
| 8 | 9 | 8 | 1.5 | 3.5 | 0.6 |
| 8 | 11.5 | 8 | 1.5 | 3.5 | 0.6 |
| 10 | 10 | 10 | 1.5 | 5 | 0.6 |
| 10 | 12.5 | 10 | 1.5 | 5 | 0.8 |
| 10 | 18 | 10 | 2 | 5 | 0.8 |

STANDARD RATINGS

| V_R (V) | C_R (μ F) | ϕ D (mm) | L (mm) | I_{LEAK} (μ A, 2min) | $\tan\delta$ +20°C • 120Hz (%) | Max. ESR +20°C • 100kHz (m Ω) | I_R • Max. Ripple Current +125°C • 100kHz (mA rms) | CapXon Part Number |
|--------------|---------------------|------------------|-----------|--------------------------------|---|--|---|--------------------|
| 16 | 120 | 6.3 | 8 | 19.2 | 16 | 32 | 1440 | AT121M016E080PTC |
| | 270 | 8 | 9 | 43.2 | 16 | 23 | 1970 | AT271M016F090PTD |
| | 330 | 8 | 11.5 | 52.8 | 16 | 20 | 2340 | AT331M016F115PTD |
| | 470 | 10 | 10 | 75.2 | 16 | 18 | 2620 | AT471M016G100PTA |
| | 560 | 10 | 12.5 | 89.6 | 16 | 14 | 3030 | AT561M016G125PTA |
| | 1500 | 10 | 18 | 240.0 | 16 | 12 | 4000 | AT152M016G180PTA |
| 25 | 68 | 6.3 | 8 | 17.0 | 16 | 35 | 1380 | AT680M025E080PTC |
| | 150 | 8 | 9 | 37.5 | 16 | 25 | 1880 | AT151M025F090PTD |
| | 220 | 8 | 11.5 | 55.0 | 16 | 22 | 2230 | AT221M025F115PTD |
| | 270 | 10 | 10 | 67.5 | 16 | 19 | 2500 | AT271M025G100PTA |
| | 330 | 10 | 12.5 | 82.5 | 16 | 14 | 2890 | AT331M025G125PTA |
| | 1000 | 10 | 18 | 250.0 | 16 | 12 | 4000 | AT102M025G180PTA |
| 35 | 47 | 6.3 | 8 | 16.5 | 16 | 45 | 1280 | AT470M035E080PTC |
| | 100 | 8 | 9 | 35.0 | 16 | 28 | 1780 | AT101M035F090PTD |
| | 150 | 8 | 11.5 | 52.5 | 16 | 25 | 2100 | AT151M035F115PTD |
| | 150 | 10 | 10 | 52.5 | 16 | 20 | 2440 | AT151M035G100PTA |
| | 220 | 10 | 12.5 | 77.0 | 16 | 15 | 2800 | AT221M035G125PTA |
| | 680 | 10 | 18 | 238.0 | 16 | 14 | 3700 | AT681M035G180PTA |
| 40 | 27 | 6.3 | 8 | 10.8 | 16 | 48 | 1230 | AT270M040E080PTC |
| | 56 | 8 | 9 | 22.4 | 16 | 30 | 1710 | AT560M040F090PTD |
| | 82 | 8 | 11.5 | 32.8 | 16 | 27 | 2000 | AT820M040F115PTD |
| | 100 | 10 | 10 | 40.0 | 16 | 21 | 2360 | AT101M040G100PTA |
| | 120 | 10 | 10 | 48.0 | 16 | 20 | 2400 | AT121M040G100PTA |
| | 180 | 10 | 12.5 | 72.0 | 16 | 18 | 2550 | AT181M040G125PTA |
| 50 | 15 | 6.3 | 8 | 7.5 | 16 | 80 | 960 | AT150M050E080PTC |
| | 33 | 8 | 9 | 16.5 | 16 | 35 | 1330 | AT330M050F090PTD |
| | 47 | 8 | 11.5 | 23.5 | 16 | 30 | 1520 | AT470M050F115PTD |
| | 56 | 10 | 10 | 28.0 | 16 | 30 | 1850 | AT560M050G100PTA |
| | 82 | 10 | 12.5 | 41.0 | 16 | 25 | 2120 | AT820M050G125PTA |
| | 220 | 10 | 18 | 110.0 | 16 | 15 | 3500 | AT221M050G180PTA |
| 63 | 10 | 6.3 | 8 | 6.3 | 16 | 100 | 840 | AT100M063E080PTC |
| | 22 | 8 | 9 | 13.9 | 16 | 40 | 1240 | AT220M063F090PTD |
| | 27 | 8 | 11.5 | 17 | 16 | 35 | 1400 | AT270M063F115PTD |
| | 33 | 10 | 10 | 20.8 | 16 | 35 | 1680 | AT330M063G100PTA |
| | 47 | 10 | 10 | 29.6 | 16 | 35 | 1680 | AT470M063G100PTA |
| | 56 | 10 | 12.5 | 35.3 | 16 | 30 | 1920 | AT560M063G125PTA |
| | 150 | 10 | 18 | 94.5 | 16 | 18 | 3200 | AT151M063G180PTA |
| 80 | 8.2 | 8 | 9 | 6.6 | 16 | 90 | 840 | AT8R2M080F090PTD |
| | 15 | 8 | 11.5 | 12 | 16 | 70 | 1120 | AT150M080F115PTD |
| | 12 | 10 | 10 | 9.6 | 16 | 70 | 1280 | AT120M080G100PTA |
| | 15 | 10 | 10 | 12 | 16 | 70 | 1280 | AT150M080G100PTA |
| | 18 | 10 | 12.5 | 14.4 | 16 | 60 | 1460 | AT180M080G125PTA |

see description at end of standard ratings

Part number shows taped version with straight leads and Ammo Pack packaging.

See "PACKAGING INFORMATION" for further lead treatment options.

STANDARD RATINGS

| V_R (V) | C_R (μF) | ϕD (mm) | L (mm) | I_{LEAK} (μA , 2min) | $\tan\delta$ +20°C • 120Hz (%) | Max. ESR +20°C • 100kHz (m Ω) | I_R - Max. Ripple Current +125°C • 100kHz (mA rms) | CapXon Part Number |
|--------------|----------------------|------------------|-----------|---------------------------------|---|--|---|--------------------|
| 100 | 8.2 | 8 | 9 | 8.2 | 16 | 100 | 800 | AT8R2M100F090PTD |
| | 10 | 8 | 11.5 | 10 | 16 | 80 | 1040 | AT100M100F115PTD |
| | 10 | 10 | 10 | 10 | 16 | 80 | 1160 | AT100M100G100PTA |
| | 12 | 10 | 10 | 12 | 16 | 80 | 1160 | AT120M100G100PTA |
| | 15 | 10 | 12.5 | 15 | 16 | 70 | 1320 | AT150M100G125PTA |
| | 47 | 10 | 12.5 | 15 | 16 | 70 | 1320 | AT470M100G125PTA |

: Leave **blank** for Standard type

: Enter **X** for AEC-Q200 type

Part number shows taped version with straight leads and Ammo Pack packaging.
See "PACKAGING INFORMATION" for further lead treatment options.
MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY

| Frequency (Hz) | 100 ≤ Freq. < 120 | 120 ≤ Freq. < 200 | 200 ≤ Freq. < 300 | 300 ≤ Freq. < 500 |
|-------------------|-------------------|-------------------|-------------------|-------------------|
| Coefficient K_f | 0.10 | 0.10 | 0.10 | 0.15 |

| Frequency (Hz) | 500 ≤ Freq. < 1k | 1k ≤ Freq. < 2k | 2k ≤ Freq. < 3k | 3k ≤ Freq. < 5k |
|-------------------|------------------|-----------------|-----------------|-----------------|
| Coefficient K_f | 0.20 | 0.30 | 0.40 | 0.45 |

| Frequency (Hz) | 5k ≤ Freq. < 10k | 10k ≤ Freq. < 15k | 15k ≤ Freq. < 20k | 20k ≤ Freq. < 40k |
|-------------------|------------------|-------------------|-------------------|-------------------|
| Coefficient K_f | 0.50 | 0.60 | 0.65 | 0.70 |

| Frequency (Hz) | 40k ≤ Freq. < 50k | 50k ≤ Freq. < 100k | 100k ≤ Freq. < 500k | 500k ≤ Freq. < 1M |
|-------------------|-------------------|--------------------|---------------------|-------------------|
| Coefficient K_f | 0.80 | 0.85 | 1.00 | 1.05 |

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our "General Precautions and Guidelines" as well as our "Packaging Information". Please refer to the following links in the table.

| | |
|------------------------------------|-------------------------------------|
| | |
| General Precautions and Guidelines | Packaging Information Hybrid Radial |
| Page 96 | Page 89 |

DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).

Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.


For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.

For further information, please visit our website www.capxongroup.com or contact CapXon directly.

AK SERIES ■ LONG LIFE AT 135°C UP TO 3000 hours

KEY FEATURES



- HYBRID CONDUCTIVE POLYMER ■ THT type
- Endurance: 135°C ■ 2000 to 3000 hours
- Low ESR and high ripple current
- Superior electrical stability over application lifetime
- AEC-Q200 version available




SPECIFICATIONS

| Items | | Performance Characteristics |
|---|-------------------|---|
| Operating Temperature Range | | -55 ~ +135°C |
| Rated Voltage Range | V _R | 16 ~ 100V DC |
| Surge Voltage | V _S | (V _R ≤ 100V): V _S = 1.25·V _R |
| Capacitance Range | C _R | 8.2 ~ 560μF |
| Cap. Tolerance | ΔC | ±20% (120Hz ■ 20°C) |
| Leakage Current (20°C ■ V _R applied) | I _{LEAK} | Not to exceed the values shown in standard ratings After 2 minutes |
| Dissipation Factor % (20°C ■ 120Hz) | tanδ | Not to exceed the values shown in standard ratings |
| Equivalent Series Resistance (20°C ■ 100kHz) | ESR | Not to exceed the values shown in standard ratings |

| Lifetime Test | | | |
|---|-------------------|---------------------------------------|---------|
| Endurance 135°C (V _R & I _R applied) | Test | 3000 hours | ≥ ∅ 8 |
| | | 2000 hours | ≤ ∅ 6.3 |
| | ΔC/C _R | Within ±30% of the initial value | |
| | tanδ | Less than 200% of the specified value | |
| | ESR | Less than 200% of the specified value | |
| | I _{Leak} | Less than the specified value | |

DIMENSIONS ■ All dimensions in mm

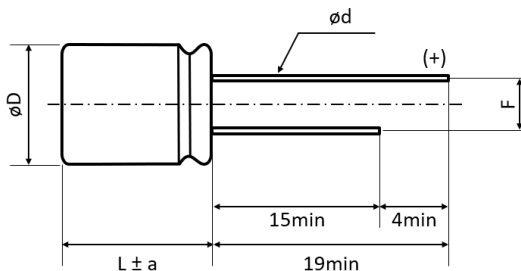

| ∅ D | L | ∅D±0.5 | a | F±0.5 | ∅d±0.05 |
|-----|------|--------|-----|-------|---------|
| 6.3 | 8 | 6.3 | 1 | 2.5 | 0.6 |
| 8 | 9 | 8 | 1.5 | 3.5 | 0.6 |
| 8 | 11.5 | 8 | 1.5 | 3.5 | 0.6 |
| 10 | 10 | 10 | 1.5 | 5 | 0.6 |
| 10 | 12.5 | 10 | 1.5 | 5 | 0.8 |

STANDARD RATINGS

| V _R (V) | C _R (μF) | ø D (mm) | L (mm) | I _{LEAK} (μA, 2min) | tanδ +20°C - 120Hz (%) | Max. ESR +20°C - 100kHz (mΩ) | I _R - Max. Ripple Current +135°C - 100kHz (mA rms) | CapXon Part Number |
|--------------------|---------------------|----------|--------|------------------------------|------------------------|------------------------------|---|--------------------|
| 16 | 120 | 6.3 | 8 | 19.2 | 16 | 32 | 1440 | AK121M016E080PTC ☐ |
| | 270 | 8 | 9 | 43.2 | 16 | 23 | 1970 | AK271M016F090PTD ☐ |
| | 330 | 8 | 11.5 | 52.8 | 16 | 20 | 2340 | AK331M016F115PTD ☐ |
| | 470 | 10 | 10 | 75.2 | 16 | 18 | 2620 | AK471M016G100PTA ☐ |
| | 560 | 10 | 12.5 | 89.6 | 16 | 14 | 3030 | AK561M016G125PTA ☐ |
| 25 | 68 | 6.3 | 8 | 17.0 | 16 | 35 | 1380 | AK680M025E080PTC ☐ |
| | 150 | 8 | 9 | 37.5 | 16 | 25 | 1880 | AK151M025F090PTD ☐ |
| | 220 | 8 | 11.5 | 55.0 | 16 | 22 | 2230 | AK221M025F115PTD ☐ |
| | 270 | 10 | 10 | 67.5 | 16 | 19 | 2500 | AK271M025G100PTA ☐ |
| | 330 | 10 | 12.5 | 82.5 | 16 | 14 | 2890 | AK331M025G125PTA ☐ |
| 35 | 47 | 6.3 | 8 | 16.5 | 16 | 45 | 1280 | AK470M035E080PTC ☐ |
| | 100 | 8 | 9 | 35.0 | 16 | 28 | 1780 | AK101M035F090PTD ☐ |
| | 150 | 8 | 11.5 | 52.5 | 16 | 25 | 2100 | AK151M035F115PTD ☐ |
| | 150 | 10 | 10 | 52.5 | 16 | 20 | 2440 | AK151M035G100PTA ☐ |
| | 220 | 10 | 12.5 | 77.0 | 16 | 15 | 2800 | AK221M035G125PTA ☐ |
| 40 | 27 | 6.3 | 8 | 10.8 | 16 | 48 | 1230 | AK270M040E080PTC ☐ |
| | 56 | 8 | 9 | 22.4 | 16 | 30 | 1710 | AK560M040F090PTD ☐ |
| | 82 | 8 | 11.5 | 32.8 | 16 | 27 | 2000 | AK820M040F115PTD ☐ |
| | 100 | 10 | 10 | 40.0 | 16 | 21 | 2360 | AK101M040G100PTA ☐ |
| | 120 | 10 | 10 | 48.0 | 16 | 20 | 2400 | AK121M040G100PTA ☐ |
| | 180 | 10 | 12.5 | 72.0 | 16 | 18 | 2550 | AK181M040G125PTA ☐ |
| 50 | 15 | 6.3 | 8 | 7.5 | 16 | 80 | 960 | AK150M050E080PTC ☐ |
| | 33 | 8 | 9 | 16.5 | 16 | 35 | 1330 | AK330M050F090PTD ☐ |
| | 47 | 8 | 11.5 | 23.5 | 16 | 30 | 1520 | AK470M050F115PTD ☐ |
| | 56 | 10 | 10 | 28.0 | 16 | 30 | 1850 | AK560M050G100PTA ☐ |
| | 82 | 10 | 12.5 | 41.0 | 16 | 25 | 2120 | AK820M050G125PTA ☐ |
| 63 | 10 | 6.3 | 8 | 6.3 | 16 | 100 | 840 | AK100M063E080PTC ☐ |
| | 22 | 8 | 9 | 13.9 | 16 | 40 | 1240 | AK220M063F090PTD ☐ |
| | 27 | 8 | 11.5 | 17.0 | 16 | 35 | 1400 | AK270M063F115PTD ☐ |
| | 33 | 10 | 10 | 20.8 | 16 | 35 | 1680 | AK330M063G100PTA ☐ |
| | 47 | 10 | 10 | 29.6 | 16 | 35 | 1680 | AK470M063G100PTA ☐ |
| | 56 | 10 | 12.5 | 35.3 | 16 | 30 | 1920 | AK560M063G125PTA ☐ |
| 80 | 8.2 | 8 | 9 | 6.6 | 16 | 90 | 840 | AK8R2M080F090PTD ☐ |
| | 15 | 8 | 11.5 | 12.0 | 16 | 70 | 1120 | AK150M080F115PTD ☐ |
| | 12 | 10 | 10 | 9.6 | 16 | 70 | 1280 | AK120M080G100PTA ☐ |
| | 15 | 10 | 10 | 12.0 | 16 | 70 | 1280 | AK150M080G100PTA ☐ |
| | 18 | 10 | 12.5 | 14.4 | 16 | 60 | 1460 | AK180M080G125PTA ☐ |
| 100 | 8.2 | 8 | 9 | 8.2 | 16 | 100 | 800 | AK8R2M100F090PTD ☐ |
| | 10 | 8 | 11.5 | 10.0 | 16 | 80 | 1040 | AK100M100F115PTD ☐ |
| | 10 | 10 | 10 | 10.0 | 16 | 80 | 1160 | AK100M100G100PTA ☐ |
| | 12 | 10 | 10 | 12.0 | 16 | 80 | 1160 | AK120M100G100PTA ☐ |
| | 15 | 10 | 12.5 | 15.0 | 16 | 70 | 1320 | AK150M100G125PTA ☐ |

☐: Leave **blank** for Standard type ☐: Enter **X** for AEC-Q200 type
Part number shows taped version with straight leads and Ammo Pack packaging.
See "PACKAGING INFORMATION" for further lead treatment options.

MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY

| | | | | |
|-----------------------|-----------------------------|------------------------------|-------------------------------|-----------------------------|
| Frequency (Hz) | 100 ≤ Freq. < 120 | 120 ≤ Freq. < 200 | 200 ≤ Freq. < 300 | 300 ≤ Freq. < 500 |
| Coefficient K_f | 0.15 | 0.15 | 0.20 | 0.25 |
| Frequency (Hz) | 500 ≤ Freq. < 1k | 1k ≤ Freq. < 2k | 2k ≤ Freq. < 3k | 3k ≤ Freq. < 5k |
| Coefficient K_f | 0.30 | 0.40 | 0.45 | 0.55 |
| Frequency (Hz) | 5k ≤ Freq. < 10k | 10k ≤ Freq. < 15k | 15k ≤ Freq. < 20k | 20k ≤ Freq. < 40k |
| Coefficient K_f | 0.60 | 0.70 | 0.75 | 0.80 |
| Frequency (Hz) | 40k ≤ Freq. < 50k | 50k ≤ Freq. < 100k | 100k ≤ Freq. < 500k | 500k ≤ Freq. < 1M |
| Coefficient K_f | 0.85 | 0.90 | 1.00 | 1.00 |

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our “General Precautions and Guidelines” as well as our “Packaging Information”. Please refer to the following links in the table.

| | |
|------------------------------------|-------------------------------------|
| | |
| General Precautions and Guidelines | Packaging Information Hybrid Radial |
| Page 96 | Page 89 |

DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).

Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.

For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.

For further information, please visit our website www.capxongroup.com or contact CapXon directly.

AE SERIES ■ HIGH RIPPLE CURRENT TYPE

KEY FEATURES



- **HYBRID CONDUCTIVE POLYMER** • THT type
- Endurance: 135°C • 4 000 hours
- Ultra-low ESR and highest ripple current
- Superior electrical stability over application lifetime
- AEC-Q200 version available




SPECIFICATIONS

| Items | | Performance Characteristics |
|--|--------------|---|
| Operating Temperature Range | | -55 ~ +135°C |
| Rated Voltage Range | V_R | 25 ~ 100V DC |
| Surge Voltage | V_S | ($V_R \leq 100V$): $V_S = 1.25 \cdot V_R$ |
| Capacitance Range | C_R | 22 ~ 680 μ F |
| Cap. Tolerance | ΔC | $\pm 20\%$ (120Hz • 20°C) |
| Leakage Current (20°C • V_R applied) | I_{LEAK} | Not to exceed the values shown in standard ratings After 2 minutes |
| Dissipation Factor % (20°C • 120Hz) | $\tan\delta$ | Not to exceed the values shown in standard ratings |
| Equivalent Series Resistance (20°C • 100kHz) | ESR | Not to exceed the values shown in standard ratings |

| Lifetime Test | | |
|--|----------------|--|
| Endurance 135°C (V_R & I_R applied) | Test | 4 000 hours |
| | $\Delta C/C_R$ | Within $\pm 30\%$ of the initial value |
| | $\tan\delta$ | Less than 200% of the specified value |
| | ESR | Less than 200% of the specified value |
| | I_{Leak} | Less than the specified value |

DIMENSIONS • All dimensions in mm

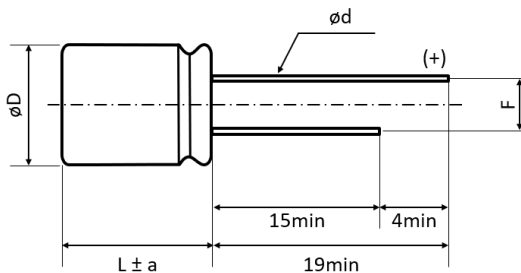

| ϕD | L | $\phi D \pm 0.5$ | a | F ± 0.5 | $\phi d \pm 0.05$ |
|----------|------|------------------|-----|-------------|-------------------|
| 10.0 | 12.5 | 10 | 1.5 | 5 | 0.8 |
| 10.0 | 16.0 | 10 | 2.0 | 5 | 0.8 |

STANDARD RATINGS

| V _R (V) | C _R (μF) | ø D (mm) | L (mm) | I _{LEAK} (μA, 2min) | tanδ +20°C - 120Hz (%) | Max. ESR +20°C - 100kHz (mΩ) | I _r - Max. Ripple Current - 100kHz (mA rms) | | CapXon Part Number |
|-----------------------|------------------------|-------------|-----------|------------------------------------|---------------------------------|---------------------------------------|---|--------|---|
| | | | | | | | +125°C | +135°C | |
| 25 | 470 | 10 | 12.5 | 117.5 | 16 | 10 | 5000 | 3500 | AE471M025G125PTA <input type="checkbox"/> |
| | 560 | 10 | 16 | 140 | 16 | 8 | 5800 | 4000 | AE561M025G160PTA <input type="checkbox"/> |
| | 680 | 10 | 16 | 170 | 16 | 8 | 5800 | 4000 | AE681M025G160PTA <input type="checkbox"/> |
| 35 | 330 | 10 | 12.5 | 115.5 | 16 | 11 | 4800 | 3300 | AE331M035G125PTA <input type="checkbox"/> |
| | 470 | 10 | 16 | 164.5 | 16 | 9 | 5500 | 3800 | AE471M035G160PTA <input type="checkbox"/> |
| 50 | 68 | 10 | 12.5 | 34 | 16 | 15 | 4000 | 2800 | AE680M050G125PTA <input type="checkbox"/> |
| | 100 | 10 | 12.5 | 50 | 16 | 15 | 4000 | 2800 | AE101M050G125PTA <input type="checkbox"/> |
| | 120 | 10 | 12.5 | 60 | 16 | 12 | 4600 | 3200 | AE121M050G125PTA <input type="checkbox"/> |
| | 150 | 10 | 12.5 | 75 | 16 | 12 | 4600 | 3200 | AE151M050G125PTA <input type="checkbox"/> |
| | 180 | 10 | 16 | 90 | 16 | 10 | 5200 | 3600 | AE181M050G160PTA <input type="checkbox"/> |
| | 220 | 10 | 16 | 110 | 16 | 10 | 5200 | 3600 | AE221M050G160PTA <input type="checkbox"/> |
| 63 | 47 | 10 | 12.5 | 29.6 | 16 | 15 | 4000 | 2800 | AE470M063G125PTA <input type="checkbox"/> |
| | 56 | 10 | 12.5 | 35.3 | 16 | 15 | 4000 | 2800 | AE560M063G125PTA <input type="checkbox"/> |
| | 68 | 10 | 12.5 | 42.8 | 16 | 15 | 4000 | 2800 | AE680M063G125PTA <input type="checkbox"/> |
| | 100 | 10 | 12.5 | 63.0 | 16 | 12 | 4600 | 3200 | AE101M063G125PTA <input type="checkbox"/> |
| | 120 | 10 | 12.5 | 75.6 | 16 | 12 | 4600 | 3200 | AE121M063G125PTA <input type="checkbox"/> |
| | 150 | 10 | 16 | 94.5 | 16 | 10 | 5200 | 3600 | AE151M063G160PTA <input type="checkbox"/> |
| 80 | 47 | 10 | 12.5 | 37.6 | 16 | 18 | 3600 | 2500 | AE470M080G125PTA <input type="checkbox"/> |
| | 56 | 10 | 12.5 | 44.8 | 16 | 18 | 3600 | 2500 | AE560M080G125PTA <input type="checkbox"/> |
| | 68 | 10 | 12.5 | 54.4 | 16 | 15 | 4000 | 2800 | AE680M080G125PTA <input type="checkbox"/> |
| | 100 | 10 | 16 | 80 | 16 | 12 | 4700 | 3300 | AE101M080G160PTA <input type="checkbox"/> |
| 100 | 22 | 10 | 12.5 | 22 | 16 | 25 | 3000 | 2100 | AE220M100G125PTA <input type="checkbox"/> |
| | 33 | 10 | 12.5 | 33 | 16 | 20 | 3400 | 2400 | AE330M100G125PTA <input type="checkbox"/> |
| | 47 | 10 | 16 | 47 | 16 | 15 | 4100 | 2900 | AE470M100G160PTA <input type="checkbox"/> |

: Leave **blank** for Standard type : Enter **X** for AEC-Q200 type

Part number shows taped version with straight leads and Ammo Pack packaging.



See "PACKAGING INFORMATION" for further lead treatment options.

MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY

| | | | | |
|----------------------------|-------------------|--------------------|---------------------|-------------------|
| Frequency (Hz) | 100 ≤ Freq. < 120 | 120 ≤ Freq. < 200 | 200 ≤ Freq. < 300 | 300 ≤ Freq. < 500 |
| Coefficient K _f | 0.15 | 0.15 | 0.20 | 0.25 |
| Frequency (Hz) | 500 ≤ Freq. < 1k | 1k ≤ Freq. < 2k | 2k ≤ Freq. < 3k | 3k ≤ Freq. < 5k |
| Coefficient K _f | 0.30 | 0.40 | 0.45 | 0.55 |
| Frequency (Hz) | 5k ≤ Freq. < 10k | 10k ≤ Freq. < 15k | 15k ≤ Freq. < 20k | 20k ≤ Freq. < 40k |
| Coefficient K _f | 0.60 | 0.70 | 0.75 | 0.80 |
| Frequency (Hz) | 40k ≤ Freq. < 50k | 50k ≤ Freq. < 100k | 100k ≤ Freq. < 500k | 500k ≤ Freq. < 1M |
| Coefficient K _f | 0.85 | 0.90 | 1.00 | 1.00 |

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our “General Precautions and Guidelines” as well as our “Packaging Information”. Please refer to the following links in the table.

| | |
|---|---|
|  |  |
| General Precautions and Guidelines | Packaging Information Hybrid Radial |
| Page 96 | Page 89 |

DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).

Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.


For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.

For further information, please visit our website www.capxongroup.com or contact CapXon directly.

AL SERIES ■ HIGH TEMPERATURE TYPE 145°C

KEY FEATURES




- HYBRID CONDUCTIVE POLYMER ■ THT type
- Endurance: 145°C ■ 2 000 hours
- Low ESR and high ripple current
Superior electrical stability over application lifetime
- AEC-Q200 version available



SPECIFICATIONS

| Items | | Performance Characteristics |
|--|----------------|---|
| Operating Temperature Range | | -55 ~ +145°C |
| Rated Voltage Range | V_R | 16 ~ 80V DC |
| Surge Voltage | V_S | ($V_R \leq 100V$): $V_S = 1.25 \cdot V_R$ |
| Capacitance Range | C_R | 8.2 ~ 560 μ F |
| Cap. Tolerance | ΔC | $\pm 20\%$ (120Hz ■ 20°C) |
| Leakage Current (20°C ■ V_R applied) | I_{LEAK} | Not to exceed the values shown in standard ratings After 2 minutes |
| Dissipation Factor % (20°C ■ 120Hz) | $\tan\delta$ | Not to exceed the values shown in standard ratings |
| Equivalent Series Resistance (20°C ■ 100kHz) | ESR | Not to exceed the values shown in standard ratings |
| Lifetime Test | | |
| Endurance 145°C (V_R & I_R applied) | Test | 2 000 hours |
| | $\Delta C/C_R$ | Within $\pm 30\%$ of the initial value |
| | $\tan\delta$ | Less than 200% of the specified value |
| | ESR | Less than 200% of the specified value |
| | I_{Leak} | Less than the specified value |

DIMENSIONS ■ All dimensions in mm

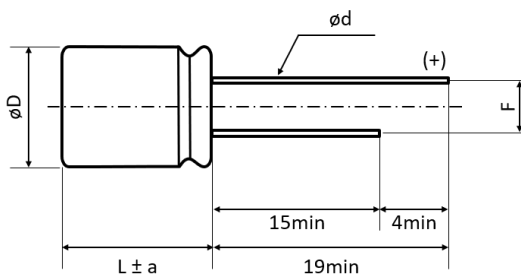

| ϕD | L | $\phi D \pm 0.5$ | a | F ± 0.5 | $\phi d \pm 0.05$ |
|----------|------|------------------|-----|-------------|-------------------|
| 8 | 9 | 8 | 1.5 | 3.5 | 0.6 |
| 8 | 11.5 | 8 | 1.5 | 3.5 | 0.6 |
| 10 | 10 | 10 | 1.5 | 5 | 0.6 |
| 10 | 12.5 | 10 | 1.5 | 5 | 0.8 |

STANDARD RATINGS

| V_R (V) | C_R (μF) | ϕD (mm) | L (mm) | I_{LEAK} (μA , 2min) | $\tan\delta$ +20°C • 120Hz (%) | Max. ESR +20°C • 100kHz (m Ω) | I_R - Max. Ripple Current +145°C • 100kHz (mA rms) | CapXon Part Number |
|--------------|----------------------|------------------|-----------|---------------------------------|---|--|---|---|
| 16 | 270 | 8 | 9 | 43.2 | 16 | 25 | 780 | AL271M016F090PTD <input type="checkbox"/> |
| | 330 | 8 | 11.5 | 52.8 | 16 | 23 | 950 | AL331M016F115PTD <input type="checkbox"/> |
| | 470 | 10 | 10 | 75.2 | 16 | 20 | 1050 | AL471M016G100PTA <input type="checkbox"/> |
| | 560 | 10 | 12.5 | 89.6 | 16 | 16 | 1220 | AL561M016G125PTA <input type="checkbox"/> |
| 25 | 150 | 8 | 9 | 37.5 | 16 | 27 | 750 | AL151M025F090PTD <input type="checkbox"/> |
| | 220 | 8 | 11.5 | 55 | 16 | 25 | 900 | AL221M025F115PTD <input type="checkbox"/> |
| | 270 | 10 | 10 | 67.5 | 16 | 22 | 1000 | AL271M025G100PTA <input type="checkbox"/> |
| | 330 | 10 | 12.5 | 82.5 | 16 | 16 | 1150 | AL331M025G125PTA <input type="checkbox"/> |
| 35 | 100 | 8 | 9 | 16.5 | 16 | 30 | 700 | AL101M035F090PTD <input type="checkbox"/> |
| | 150 | 8 | 11.5 | 35 | 16 | 27 | 850 | AL151M035F115PTD <input type="checkbox"/> |
| | 150 | 10 | 10 | 52.5 | 16 | 23 | 950 | AL151M035G100PTA <input type="checkbox"/> |
| | 220 | 10 | 12.5 | 77 | 16 | 18 | 1100 | AL221M035G125PTA <input type="checkbox"/> |
| 40 | 56 | 8 | 9 | 22.4 | 16 | 30 | 660 | AL560M040F090PTD <input type="checkbox"/> |
| | 82 | 8 | 11.5 | 32.8 | 16 | 27 | 800 | AL820M040F115PTD <input type="checkbox"/> |
| | 100 | 10 | 10 | 40 | 16 | 25 | 920 | AL101M040G100PTA <input type="checkbox"/> |
| | 120 | 10 | 10 | 48 | 16 | 23 | 920 | AL121M040G100PTA <input type="checkbox"/> |
| | 180 | 10 | 12.5 | 48 | 16 | 20 | 1040 | AL181M040G125PTA <input type="checkbox"/> |
| 50 | 33 | 8 | 9 | 16.5 | 16 | 35 | 620 | AL330M050F090PTD <input type="checkbox"/> |
| | 47 | 8 | 11.5 | 23.5 | 16 | 28 | 730 | AL570M050F115PTD <input type="checkbox"/> |
| | 56 | 10 | 10 | 28 | 16 | 28 | 880 | AL560M050G100PTA <input type="checkbox"/> |
| | 82 | 10 | 12.5 | 41 | 16 | 25 | 1040 | AL820M050G125PTA <input type="checkbox"/> |
| 63 | 22 | 8 | 9 | 13.9 | 16 | 40 | 600 | AL220M063F090PTD <input type="checkbox"/> |
| | 27 | 8 | 11.5 | 17 | 16 | 35 | 700 | AL270M063F115PTD <input type="checkbox"/> |
| | 33 | 10 | 10 | 20.8 | 16 | 30 | 850 | AL330M063G100PTA <input type="checkbox"/> |
| | 47 | 10 | 10 | 29.6 | 16 | 30 | 850 | AL470M063G100PTA <input type="checkbox"/> |
| | 56 | 10 | 12.5 | 35.3 | 16 | 25 | 950 | AL560M063G125PTA <input type="checkbox"/> |
| 80 | 8.2 | 8 | 9 | 6.6 | 16 | 90 | 450 | AL8R2M080F090PTD <input type="checkbox"/> |
| | 12 | 10 | 10 | 9.6 | 16 | 70 | 650 | AL120M080G100PTA <input type="checkbox"/> |
| | 15 | 8 | 11.5 | 12 | 16 | 70 | 550 | AL150M080F115PTD <input type="checkbox"/> |
| | 15 | 10 | 10 | 12 | 16 | 70 | 650 | AL150M080G100PTA <input type="checkbox"/> |
| | 18 | 10 | 12.5 | 14.4 | 16 | 50 | 750 | AL180M080G125PTA <input type="checkbox"/> |

: Leave **blank** for Standard type

: Enter **X** for AEC-Q200 type

Part number shows taped version with straight leads and Ammo Pack packaging.
See "PACKAGING INFORMATION" for further lead treatment options.

MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY

| | | | | |
|-----------------------|-----------------------------|------------------------------|-------------------------------|-----------------------------|
| Frequency (Hz) | 100 ≤ Freq. < 120 | 120 ≤ Freq. < 200 | 200 ≤ Freq. < 300 | 300 ≤ Freq. < 500 |
| Coefficient K_f | 0.10 | 0.10 | 0.10 | 0.15 |
| Frequency (Hz) | 500 ≤ Freq. < 1k | 1k ≤ Freq. < 2k | 2k ≤ Freq. < 3k | 3k ≤ Freq. < 5k |
| Coefficient K_f | 0.20 | 0.30 | 0.40 | 0.45 |
| Frequency (Hz) | 5k ≤ Freq. < 10k | 10k ≤ Freq. < 15k | 15k ≤ Freq. < 20k | 20k ≤ Freq. < 40k |
| Coefficient K_f | 0.50 | 0.60 | 0.65 | 0.70 |
| Frequency (Hz) | 40k ≤ Freq. < 50k | 50k ≤ Freq. < 100k | 100k ≤ Freq. < 500k | 500k ≤ Freq. < 1M |
| Coefficient K_f | 0.80 | 0.85 | 1.00 | 1.05 |

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our “General Precautions and Guidelines” as well as our “Packaging Information”. Please refer to the following links in the table.

| | |
|------------------------------------|-------------------------------------|
| | |
| General Precautions and Guidelines | Packaging Information Hybrid Radial |
| Page 96 | Page 89 |

DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).

Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.


For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.

For further information, please visit our website www.capxongroup.com or contact CapXon directly.

AM SERIES • HIGH TEMPERATURE TYPE 150°C

KEY FEATURES



- HYBRID CONDUCTIVE POLYMER • THT type
- Endurance: 150°C • 1 000 hours
- Low ESR and high ripple current
- Superior electrical stability over application lifetime
- AEC-Q200 version available




SPECIFICATIONS

| Items | | Performance Characteristics |
|--|--------------|---|
| Operating Temperature Range | | -55 ~ +150°C |
| Rated Voltage Range | V_R | 16 ~ 80V DC |
| Surge Voltage | V_S | ($V_R \leq 100V$): $V_S = 1.25 \cdot V_R$ |
| Capacitance Range | C_R | 8.2 ~ 560 μ F |
| Cap. Tolerance | ΔC | $\pm 20\%$ (120Hz • 20°C) |
| Leakage Current (20°C • V_R applied) | I_{LEAK} | Not to exceed the values shown in standard ratings After 2 minutes |
| Dissipation Factor % (20°C • 120Hz) | $\tan\delta$ | Not to exceed the values shown in standard ratings |
| Equivalent Series Resistance (20°C • 100kHz) | ESR | Not to exceed the values shown in standard ratings |

| Lifetime Test | | |
|--|----------------|--|
| Endurance 150°C (V_R & I_R applied) | Test | 1 000 hours |
| | $\Delta C/C_R$ | Within $\pm 30\%$ of the initial value |
| | $\tan\delta$ | Less than 200% of the specified value |
| | ESR | Less than 200% of the specified value |
| | I_{Leak} | Less than the specified value |

DIMENSIONS • All dimensions in mm

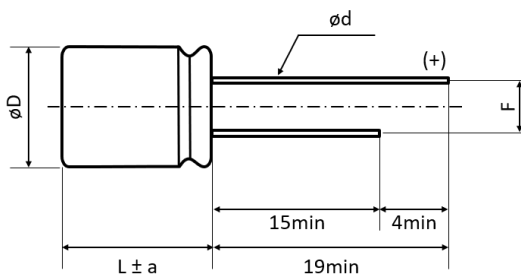

| ϕD | L | $\phi D \pm 0.5$ | a | F ± 0.5 | $\phi d \pm 0.05$ |
|----------|------|------------------|-----|-------------|-------------------|
| 8 | 9 | 8 | 1.5 | 3.5 | 0.6 |
| 8 | 11.5 | 8 | 1.5 | 3.5 | 0.6 |
| 10 | 10 | 10 | 1.5 | 5 | 0.6 |
| 10 | 12.5 | 10 | 1.5 | 5 | 0.8 |

STANDARD RATINGS

| V _R (V) | C _R (μF) | ∅ D (mm) | L (mm) | I _{LEAK} (μA, 2min) | tanδ +20°C • 120Hz (%) | Max. ESR +20°C • 100kHz (mΩ) | I _R - Max. Ripple Current +150°C • 100kHz (mA rms) | CapXon Part Number |
|-----------------------|------------------------|-------------|-----------|---------------------------------|---------------------------------|---------------------------------------|--|--------------------|
| 16 | 270 | 8 | 9 | 43.2 | 16 | 25 | 770 | AM271M016F090PTD ☐ |
| | 330 | 8 | 11.5 | 52.8 | 16 | 23 | 800 | AM331M016F115PTD ☐ |
| | 470 | 10 | 10 | 75.2 | 16 | 20 | 880 | AM471M016G100PTA ☐ |
| | 560 | 10 | 12.5 | 89.6 | 16 | 16 | 1010 | AM561M016G125PTA ☐ |
| 25 | 150 | 8 | 9 | 37.5 | 16 | 27 | 750 | AM151M025F090PTD ☐ |
| | 220 | 8 | 11.5 | 55.0 | 16 | 25 | 770 | AM221M025F115PTD ☐ |
| | 270 | 10 | 10 | 67.5 | 16 | 22 | 850 | AM271M025G100PTA ☐ |
| | 330 | 10 | 12.5 | 82.5 | 16 | 16 | 970 | AM331M025G125PTA ☐ |
| 35 | 100 | 8 | 9 | 16.5 | 16 | 30 | 710 | AM101M035F090PTD ☐ |
| | 150 | 8 | 11.5 | 35.0 | 16 | 27 | 730 | AM151M035F115PTD ☐ |
| | 150 | 10 | 10 | 52.5 | 16 | 23 | 830 | AM151M035G100PTA ☐ |
| | 220 | 10 | 12.5 | 77.0 | 16 | 18 | 950 | AM221M035G125PTA ☐ |
| 40 | 56 | 8 | 9 | 22.4 | 16 | 30 | 650 | AM560M040F090PTD ☐ |
| | 82 | 8 | 11.5 | 32.8 | 16 | 27 | 660 | AM820M040F115PTD ☐ |
| | 100 | 10 | 10 | 40.0 | 16 | 25 | 720 | AM101M040G100PTA ☐ |
| | 120 | 10 | 10 | 48.0 | 16 | 23 | 740 | AM121M040G100PTA ☐ |
| | 180 | 10 | 12.5 | 48.0 | 16 | 20 | 850 | AM181M040G125PTA ☐ |
| 50 | 33 | 8 | 9 | 16.5 | 16 | 35 | 550 | AM330M050F090PTD ☐ |
| | 47 | 8 | 11.5 | 23.5 | 16 | 28 | 620 | AM470M050F115PTD ☐ |
| | 56 | 10 | 10 | 28.0 | 16 | 28 | 660 | AM560M050G100PTA ☐ |
| | 82 | 10 | 12.5 | 41.0 | 16 | 25 | 720 | AM820M050G125PTA ☐ |
| 63 | 22 | 8 | 9 | 13.9 | 16 | 40 | 520 | AM220M063F090PTD ☐ |
| | 27 | 8 | 11.5 | 17.0 | 16 | 35 | 540 | AM270M063F115PTD ☐ |
| | 33 | 10 | 10 | 20.8 | 16 | 30 | 570 | AM330M063G100PTA ☐ |
| | 47 | 10 | 10 | 29.6 | 16 | 30 | 570 | AM470M063G100PTA ☐ |
| | 56 | 10 | 12.5 | 35.3 | 16 | 25 | 620 | AM560M063G125PTA ☐ |
| 80 | 8.2 | 8 | 9 | 6.6 | 16 | 90 | 320 | AM8R2M080F090PTD ☐ |
| | 12 | 10 | 10 | 9.6 | 16 | 70 | 440 | AM120M080G100PTA ☐ |
| | 15 | 8 | 11.5 | 12.0 | 16 | 70 | 410 | AM150M080F115PTD ☐ |
| | 15 | 10 | 10 | 12.0 | 16 | 70 | 440 | AM150M080G100PTA ☐ |
| | 18 | 10 | 12.5 | 14.4 | 16 | 50 | 480 | AM180M080G125PTA ☐ |

☐: Leave **blank** for Standard type ☐: Enter **X** for AEC-Q200 type
Part number shows taped version with straight leads and Ammo Pack packaging.
See "PACKAGING INFORMATION" for further lead treatment options.

MULTIPLIER K_f for RIPPLE CURRENT vs. FREQUENCY

| | | | | |
|-----------------------|-----------------------------|------------------------------|-------------------------------|-----------------------------|
| Frequency (Hz) | 100 ≤ Freq. < 120 | 120 ≤ Freq. < 200 | 200 ≤ Freq. < 300 | 300 ≤ Freq. < 500 |
| Coefficient K_f | 0.10 | 0.10 | 0.10 | 0.15 |
| Frequency (Hz) | 500 ≤ Freq. < 1k | 1k ≤ Freq. < 2k | 2k ≤ Freq. < 3k | 3k ≤ Freq. < 5k |
| Coefficient K_f | 0.20 | 0.30 | 0.40 | 0.45 |
| Frequency (Hz) | 5k ≤ Freq. < 10k | 10k ≤ Freq. < 15k | 15k ≤ Freq. < 20k | 20k ≤ Freq. < 40k |
| Coefficient K_f | 0.50 | 0.60 | 0.65 | 0.70 |
| Frequency (Hz) | 40k ≤ Freq. < 50k | 50k ≤ Freq. < 100k | 100k ≤ Freq. < 500k | 500k ≤ Freq. < 1M |
| Coefficient K_f | 0.80 | 0.85 | 1.00 | 1.05 |

PRECAUTIONS, GUIDELINES AND PACKAGING INFORMATION

Unless otherwise agreed in individual specifications, all products are subject to our “General Precautions and Guidelines” as well as our “Packaging Information”. Please refer to the following links in the table.

| | |
|------------------------------------|-------------------------------------|
| | |
| General Precautions and Guidelines | Packaging Information Hybrid Radial |
| Page 96 | Page 89 |

DISCLAIMER

All product related data (e.g. specification, statements and general information) are subject to change without any notice. It is necessary that the customer observes all product related technical / application information and handling instructions.

CapXon products are designed and manufactured according to severe quality and safety standards. Under no circumstance, CapXon warrants that any CapXon product is suitable for the purposes intended for your application, even CapXon knows the application. It is customer's duty and obligation to check and make sure that CapXon products are suitable for the purposes intended and select the correct and proper CapXon product. Customers are requested to perform a sufficient validation and reliability evaluation to assure needed safety level and reliability performance by suitable designs and to apply proper safeguards (e.g. redundancies, protective circuits).

Particular operating conditions (ambient temperature, ripple current, voltage, thermal resistance, etc.) as well as storage, production or assembly may affect the performance and the lifetime of the capacitor. Please consult CapXon for lifetime estimation, failure mode considerations or worst-case scenarios according to the product technology, product tolerances / deviations or change of the characteristics of the capacitor due to shipment, storage, handling, production and usage.

For aerospace or military application, life-saving, life-sustaining, safety critical applications or any application where failure may cause severe personal injury or death, please consult us before design-in the capacitor in your application.

Except for the written expressed warranties, CapXon does not impliedly, by assumption or whatever else, warrant, undertake, promise any other warranty or guaranty for any CapXon product.


For further information, please visit our website www.capxongroup.com or contact CapXon directly.

PRODUCT CODE - SMD HYBRID CONDUCTIVE POLYMER CAPACITORS



SMD type example:

AA series ▪ 220µF ▪ 25V ▪ ±20% ▪ Ø 8mm ▪ L 10.5mm ▪ Tape & Reel ▪ AEC-Q200 ▪ Vibration proof package

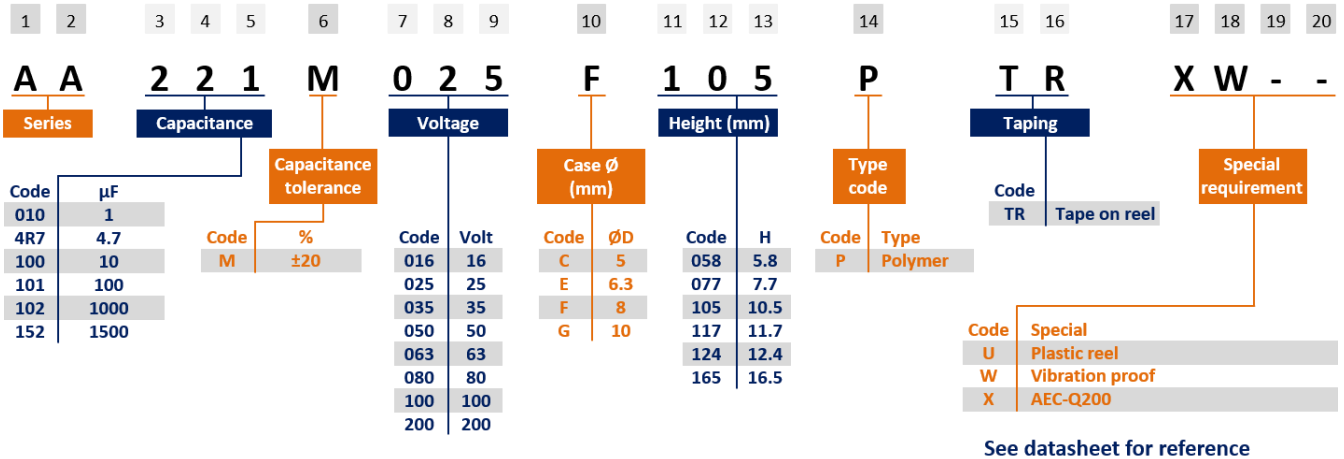

Please consult CapXon for further assistance

MARKING - SMD HYBRID CONDUCTIVE POLYMER CAPACITORS

Hybrid Polymer Capacitor - SMD type

CapXon: Manufacturer trademark
 220: Nominal capacitance (µF)
 25V: Rated voltage (V) ▪ Standard type
 25X: Rated voltage (V) ▪ AEC-Q200 type
 (-) polarity (Cathode indicate)

AA: AA Series
 003: Production datacode year/week (ex. 2020/3rd week)

Top view Standard type


Top view AEC-Q200 type

0 03

→ Production week

→ Last digit of the year


TAPING - SMD HYBRID CONDUCTIVE POLYMER CAPACITORS - REEL PACK

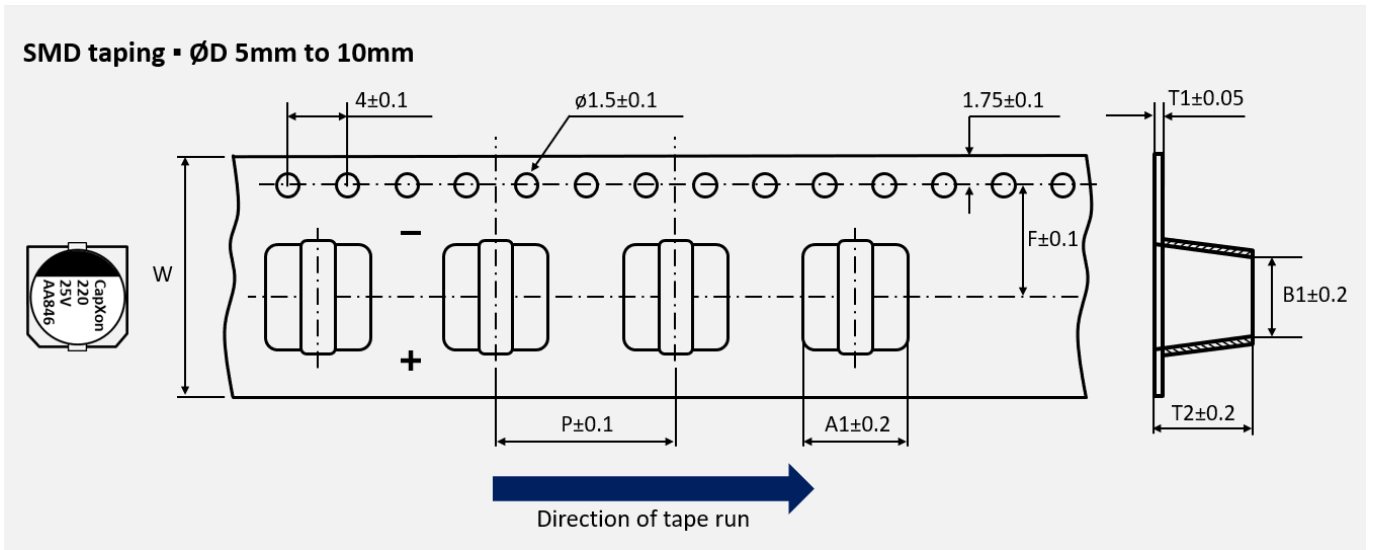

All dimensions in mm

| ϕD | 5 x 5.8 | 6.3 x 5.8 | 6.3 x 7.7 | 8 x 10.5 | 8 x 11.7 | 10 x 10.5 | 10 x 12.4 | 10 x 16.5 |
|----------|---------|-----------|-----------|----------|----------|-----------|-----------|-----------|
| W | 12 | 16 | 16 | 24 | 24 | 24 | 24 | 24 |
| P | 12 | 12 | 12 | 16 | 16 | 16 | 16 | 16 |
| F | 5.5 | 7.5 | 7.5 | 11.5 | 11.5 | 11.5 | 11.5 | 11.5 |
| A1 | 5.7 | 7 | 7 | 8.7 | 8.7 | 10.7 | 10.7 | 10.7 |
| B1 | 5.7 | 7 | 7 | 8.7 | 8.7 | 10.7 | 10.7 | 10.7 |
| T1 | 0.4 | 0.4 | 0.4 | 0.4 | 0.4 | 0.4 | 0.4 | 0.5 |
| T2 | 6.1 | 6.2 | 8 | 11 | 13 | 11 | 12.9 | 17.5 |

TAPING • SMD HYBRID CONDUCTIVE POLYMER CAPACITORS • REEL PACK • PAPER REEL

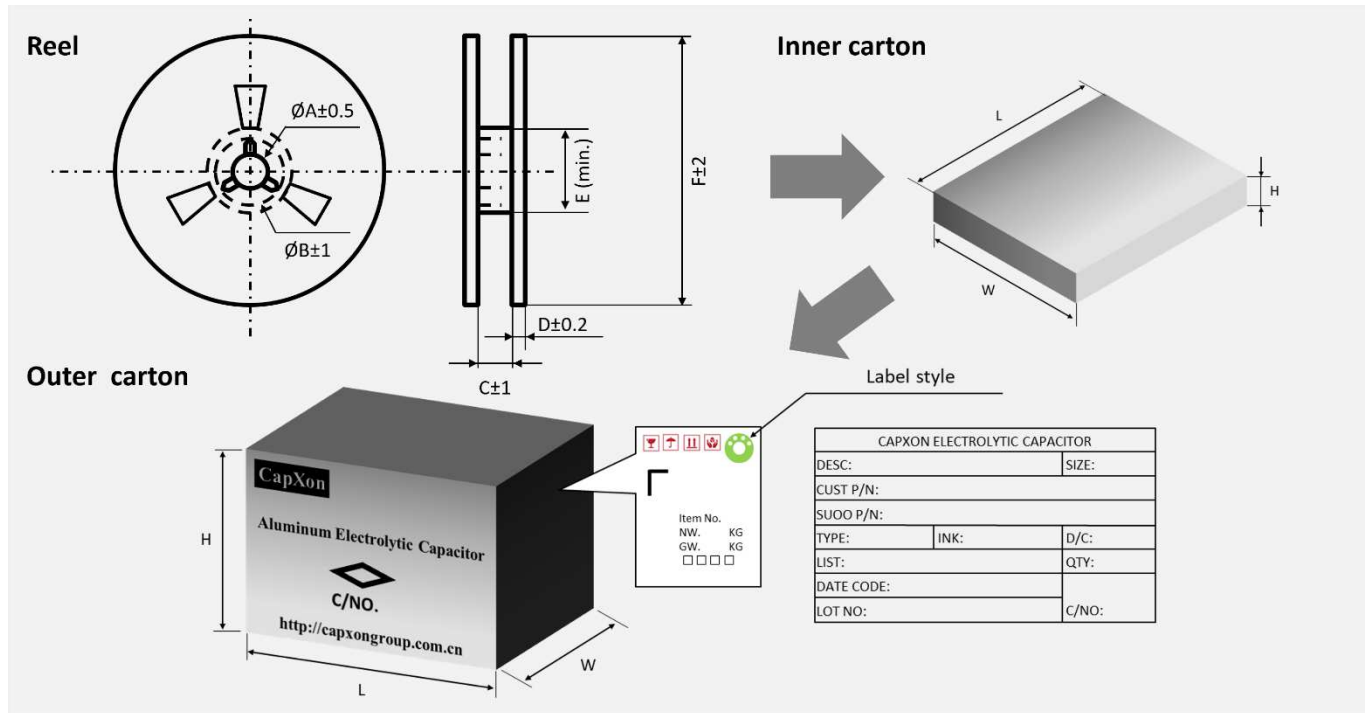


| Ø D (mm) | L (mm) | A (mm) | Reel quantity (pcs) | Inner box quantity (pcs) | Inner box size L x W x H (mm) | Outer box quantity (pcs) | Outer box size L x W x H (mm) | Country of origin | Tariff number |
|----------|--------|--------|---------------------|--------------------------|-------------------------------|--------------------------|-------------------------------|-------------------|---------------|
| 5 | 5.8 | 14 | 1000 | 5000 | 400 x 390 x 106 | 15000 | 425 x 412 x 340 | China | 85322200 |
| 6.3 | 5.8 | 18 | 1000 | 4000 | 400 x 390 x 106 | 12000 | 425 x 412 x 340 | China | 85322200 |
| | 7.7 | 18 | 900 | 3600 | 400 x 390 x 106 | 10800 | 425 x 412 x 340 | China | 85322200 |
| 8 | 10.5 | 26 | 500 | 1500 | 400 x 390 x 106 | 4500 | 425 x 412 x 340 | China | 85322200 |
| | 11.7 | 26 | 400 | 1200 | 400 x 390 x 106 | 3600 | 425 x 412 x 340 | China | 85322200 |
| 10 | 10.5 | 26 | 500 | 1500 | 400 x 390 x 106 | 4500 | 425 x 412 x 340 | China | 85322200 |
| | 12.4 | 26 | 400 | 1200 | 400 x 390 x 106 | 3600 | 425 x 412 x 340 | China | 85322200 |
| | 16.5 | 26 | 250 | 750 | 400 x 390 x 106 | 2250 | 425 x 412 x 340 | China | 85322200 |

All reel dimensions in mm

| Ø D | 5 | 6.3 | 6.3 | 6.3 | 6.3 | 8 | 8 | 8 | 8 | 10 | 10 | 10 | 10 |
|-----|-----|-----|-----|-----|-----|-----|-----|------|------|-----|------|------|------|
| L | 5.8 | 5.5 | 5.8 | 6.1 | 7.7 | 6.5 | 7.7 | 10.5 | 11.7 | 8.7 | 10.5 | 12.4 | 16.5 |
| A | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 | 15 |
| B | 21 | 21 | 21 | 21 | 21 | 21 | 21 | 21 | 21 | 21 | 21 | 21 | 21 |
| C | 14 | 18 | 18 | 18 | 18 | 18 | 18 | 26 | 26 | 26 | 26 | 26 | 26 |
| D | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| E | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 |
| F | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 |

Remark: Standard = Paper reel

TAPING • SMD HYBRID CONDUCTIVE POLYMER CAPACITORS • REEL PACK • PLASTIC REEL

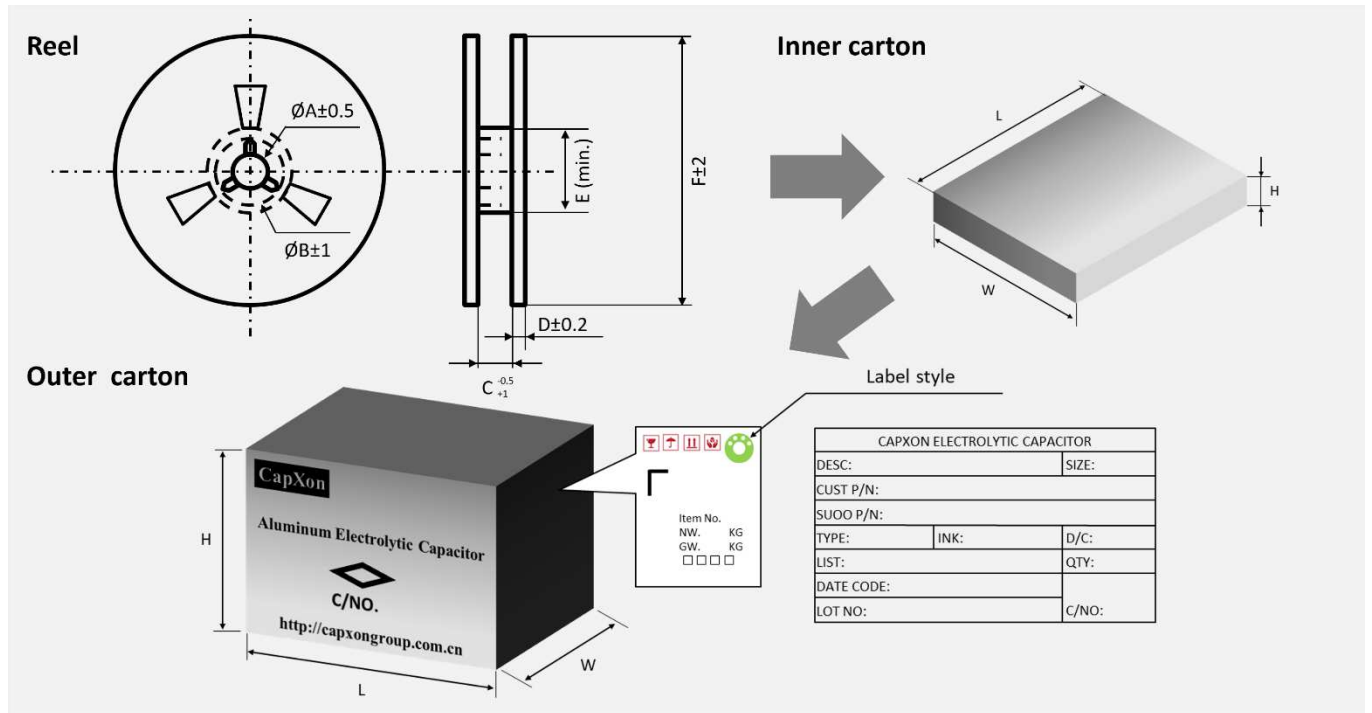


| Ø D (mm) | L (mm) | A (mm) | Reel quantity (pcs) | Inner box quantity (pcs) | Inner box size L x W x H (mm) | Outer box quantity (pcs) | Outer box size L x W x H (mm) | Country of origin | Tariff number |
|----------|--------|--------|---------------------|--------------------------|-------------------------------|--------------------------|-------------------------------|-------------------|---------------|
| 5 | 5.8 | 14 | 1000 | 5000 | 400 x 390 x 106 | 15000 | 425 x 412 x 340 | China | 85322200 |
| 6.3 | 5.8 | 18 | 1000 | 4000 | 400 x 390 x 106 | 12000 | 425 x 412 x 340 | China | 85322200 |
| | 7.7 | 18 | 900 | 3600 | 400 x 390 x 106 | 10800 | 425 x 412 x 340 | China | 85322200 |
| 8 | 10.5 | 26 | 500 | 1500 | 400 x 390 x 106 | 4500 | 425 x 412 x 340 | China | 85322200 |
| | 11.7 | 26 | 400 | 1200 | 400 x 390 x 106 | 3600 | 425 x 412 x 340 | China | 85322200 |
| 10 | 10.5 | 26 | 500 | 1500 | 400 x 390 x 106 | 4500 | 425 x 412 x 340 | China | 85322200 |
| | 12.4 | 26 | 400 | 1200 | 400 x 390 x 106 | 3600 | 425 x 412 x 340 | China | 85322200 |
| | 16.5 | 26 | 250 | 750 | 400 x 390 x 106 | 2250 | 425 x 412 x 340 | China | 85322200 |


All reel dimensions in mm

| Ø D | 5 | 6.3 | 6.3 | 6.3 | 6.3 | 8 | 8 | 8 | 8 | 10 | 10 | 10 | 10 |
|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|
| L | 5.8 | 5.5 | 5.8 | 6.1 | 7.7 | 6.5 | 7.7 | 10.5 | 11.7 | 8.7 | 10.5 | 12.4 | 16.5 |
| A | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 | 13.2 |
| B | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 | 21.5 |
| C | 13 | 17 | 17 | 17 | 17 | 17 | 17 | 25 | 25 | 25 | 25 | 25 | 25 |
| D | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |
| E | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 |
| F | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 | 380 |

Remark: Plastic reel = Add code "U" at the end of the part number

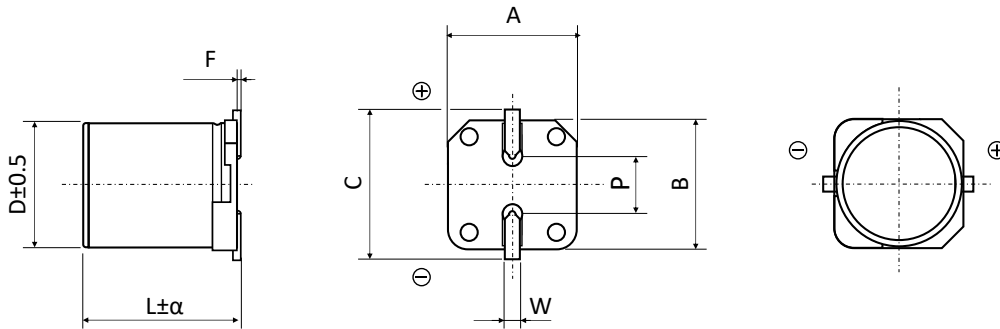
DIMENSIONS STANDARD PACKAGE ▪ All dimensions in mm


| ϕD | L | α | $A \pm 0.2$ | $B \pm 0.2$ | $C \pm 0.2$ | F | $P \pm 0.2$ | W |
|----------|------|----------|-------------|-------------|-------------|----------|-------------|------------|
| 5.0 | 5.8 | 0.3 | 5.3 | 5.3 | 5.9 | 0 to 0.3 | 1.4 | 0.5 to 0.8 |
| 6.3 | 5.8 | 0.3 | 6.6 | 6.6 | 7.2 | 0 to 0.3 | 2.2 | 0.5 to 0.8 |
| 6.3 | 7.7 | 0.3 | 6.6 | 6.6 | 7.2 | 0 to 0.3 | 2.2 | 0.5 to 0.8 |
| 8.0 | 10.5 | 0.3 | 8.3 | 8.3 | 9.0 | 0 to 0.3 | 3.1 | 0.7 to 1.1 |
| 8.0 | 11.7 | 0.3 | 8.3 | 8.3 | 9.0 | 0 to 0.3 | 3.1 | 0.7 to 1.1 |
| 10.0 | 10.5 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 0.7 to 1.1 |
| 10.0 | 12.4 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 1.0 to 1.4 |
| 10.0 | 16.5 | 0.3 | 10.3 | 10.3 | 11.0 | 0 to 0.3 | 4.5 | 1.0 to 1.4 |

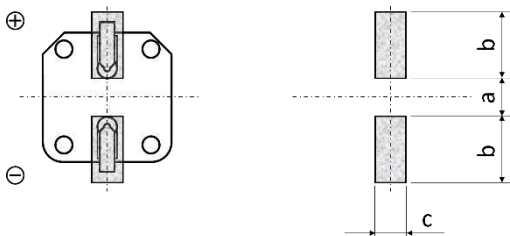PAD LAYOUT STANDARD PACKAGE ▪ All dimensions in mm


| ϕD | L | a | b | c |
|----------|------|-----|-----|-----|
| 5.0 | 5.8 | 1.4 | 3.0 | 1.6 |
| 6.3 | 5.8 | 2.1 | 3.5 | 1.6 |
| 6.3 | 7.7 | 2.1 | 3.5 | 1.6 |
| 8.0 | 10.5 | 2.8 | 4.2 | 1.9 |
| 8.0 | 11.7 | 2.8 | 4.2 | 1.9 |
| 10.0 | 10.5 | 4.3 | 4.4 | 1.9 |
| 10.0 | 12.4 | 4.3 | 4.4 | 2.2 |
| 10.0 | 16.5 | 4.3 | 4.4 | 2.2 |


DIMENSIONS VP PACKAGE (VIBRATION-PROOF) Ø D6.3 ▪ All dimensions in mm

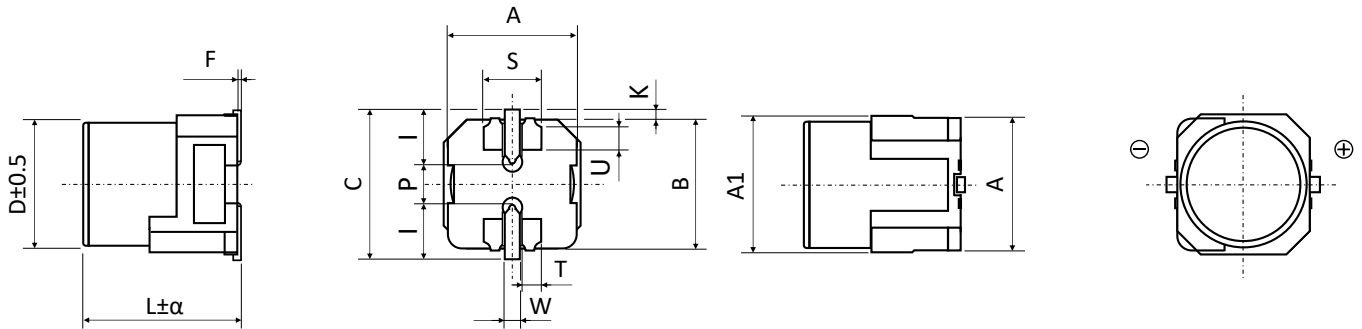

| Ø D | L | α | A ± 0.2 | A1 (max.) | B ± 0.2 | C (max.) | F | K |
|-----|------|-----------|---------|-----------|---------|----------|-----------|--------------------|
| 6.3 | 5.8 | -0.3/+0.7 | 6.6 | 7.1 | 6.6 | 7.8 | 0 to 0.15 | 0.35 +0.15/-0.2 |
| 6.3 | 7.7 | -0.3/+0.7 | 6.6 | 7.1 | 6.6 | 7.8 | 0 to 0.15 | 0.35 +0.15/-0.2 |
| 6.3 | 10.5 | -0.3/+0.7 | 6.6 | 7.1 | 6.6 | 7.8 | 0 to 0.15 | 0.35 +0.15/-0.2 |


| Ø D | L | P ± 0.2 | S ± 0.1 | I ± 0.1 | T ± 0.1 | U ± 0.1 | W ± 0.1 |
|-----|------|---------|---------|---------|---------|---------|---------|
| 6.3 | 5.8 | 2.2 | 2.9 | 2.4 | 1.1 | 1.55 | 0.65 |
| 6.3 | 7.7 | 2.2 | 2.9 | 2.4 | 1.1 | 1.55 | 0.65 |
| 6.3 | 10.5 | 2.2 | 2.9 | 2.4 | 1.1 | 1.55 | 0.65 |

PAD LAYOUT VP PACKAGE (VIBRATION-PROOF) Ø D6.3 ▪ All dimensions in mm

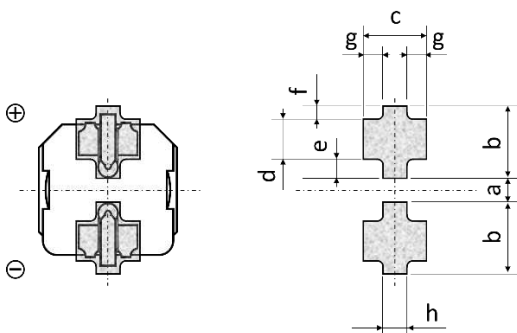

| Ø D | L | a | b | c | d | e | f | g | h |
|-----|------|-----|-----|-----|-----|------|------|-----|-----|
| 6.3 | 5.8 | 1.2 | 3.6 | 3.2 | 2.0 | 0.95 | 0.65 | 1.0 | 1.2 |
| 6.3 | 7.7 | 1.2 | 3.6 | 3.2 | 2.0 | 0.95 | 0.65 | 1.0 | 1.2 |
| 6.3 | 10.5 | 1.2 | 3.6 | 3.2 | 2.0 | 0.95 | 0.65 | 1.0 | 1.2 |


DIMENSIONS VP PACKAGE (VIBRATION-PROOF) Ø D8 and D10 ▪ All dimensions in mm

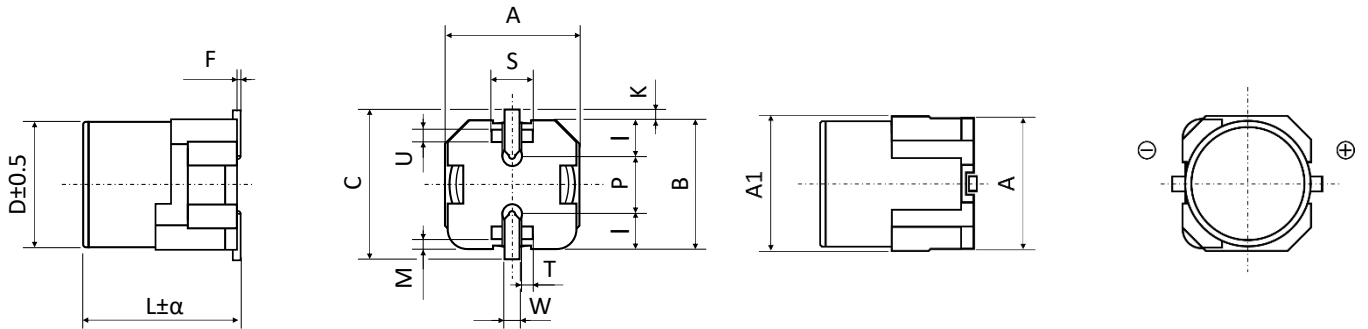

| Ø D | L | α | A ± 0.2 | A1 (max.) | B ± 0.2 | C (max.) | F | K ± 0.2 |
|------|------|-----------|---------|-----------|---------|----------|-----------|---------|
| 8.0 | 10.5 | -0.3/+0.7 | 8.3 | 8.8 | 8.3 | 10.0 | 0 to 0.15 | 0.7 |
| 8.0 | 11.7 | -0.3/+0.7 | 8.3 | 8.8 | 8.3 | 10.0 | 0 to 0.15 | 0.7 |
| 10.0 | 10.5 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |
| 10.0 | 12.4 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |
| 10.0 | 16.5 | -0.3/+0.7 | 10.3 | 10.8 | 10.3 | 12.0 | 0 to 0.15 | 0.7 |

| Ø D | L | P ± 0.2 | S ± 0.1 | I ± 0.1 | T ± 0.1 | U ± 0.1 | W ± 0.1 | M ± 0.1 |
|------|------|---------|---------|---------|---------|---------|---------|---------|
| 8.0 | 10.5 | 3.1 | 3 | 3.4 | 1.4 | 0.7 | 1.2 | 0.7 |
| 8.0 | 11.7 | 3.1 | 3 | 3.4 | 1.4 | 0.7 | 1.2 | 0.7 |
| 10.0 | 10.5 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |
| 10.0 | 12.4 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |
| 10.0 | 16.5 | 4.6 | 3.3 | 3.5 | 1.5 | 0.8 | 1.2 | 0.9 |

PAD LAYOUT VP PACKAGE (VIBRATION-PROOF) Ø D8 and D10 ▪ All dimensions in mm

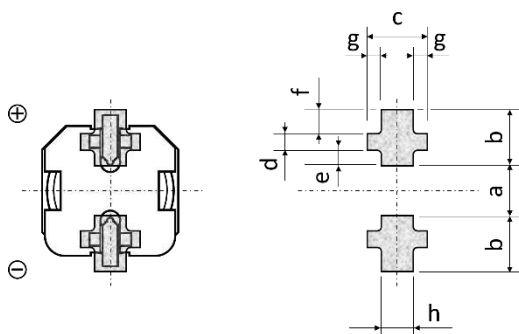


| Ø D | L | a | b | c | d | e | f | g | h |
|------|------|-----|-----|-----|-----|-----|-----|-----|-----|
| 8.0 | 10.5 | 2.7 | 4.0 | 4.7 | 1.3 | 1.0 | 1.7 | 1.1 | 2.5 |
| 8.0 | 11.7 | 2.7 | 4.0 | 4.7 | 1.3 | 1.0 | 1.7 | 1.1 | 2.5 |
| 10.0 | 10.5 | 3.9 | 4.4 | 4.7 | 1.3 | 1.2 | 1.9 | 1.1 | 2.5 |
| 10.0 | 12.4 | 3.9 | 4.4 | 4.7 | 1.3 | 1.2 | 1.9 | 1.1 | 2.5 |
| 10.0 | 16.5 | 3.9 | 4.4 | 4.7 | 1.3 | 1.2 | 1.9 | 1.1 | 2.5 |

VIBRATION SPECIFICATION - STANDARD AND VIBRATION PROOF PACKAGE




Reference JIS C 60068-2 / IEC 60068-2-6

| Package | Condition | Determinant Standard |
|-----------------|--|---|
| Standard | <ol style="list-style-type: none"> 10Hz ~ 2kHz ~ 10Hz (20 minutes) Amplitude (single peak): 0.35 mm (at 10 ~ 55Hz) Acceleration: 49m/s² (5g at 55 ~ 2kHz) X, Y, Z directions, 4 hours per direction, total 12 hours | <ol style="list-style-type: none"> $\Delta C/C \leq \pm 5\%$ of initial value $DF \leq$ stated limit $LC \leq$ stated limit No visible damage No leakage of electrolyte |
| Vibration-proof | <ol style="list-style-type: none"> 10Hz ~ 2kHz ~ 10Hz (10 minutes) Amplitude (single peak): 2 mm (at 10 ~ 55Hz) Acceleration: 294m/s² (30g at 55 ~ 2kHz) X, Y, Z directions, 4 hours per direction, total 12 hours | <ol style="list-style-type: none"> $\Delta C/C \leq \pm 5\%$ of initial value $DF \leq$ stated limit $LC \leq$ stated limit No visible damage No leakage of electrolyte |

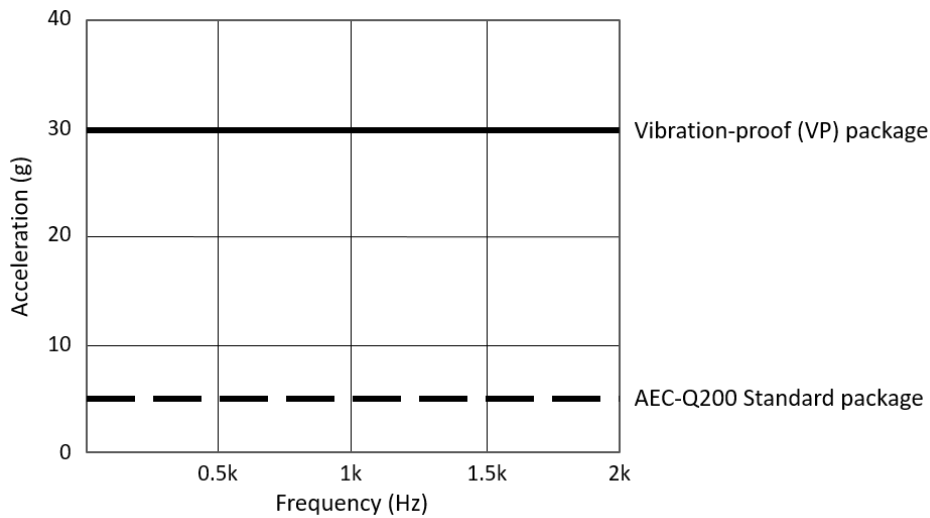


PRODUCT CODE - RADIAL HYBRID CONDUCTIVE POLYMER CAPACITORS



THT type example:


AT series ▪ 47µF ▪ 50V ▪ ±20% ▪ Ø 8mm ▪ L 11.5mm ▪ P 3.5mm ▪ Tape Ammo ▪ AEC-Q200

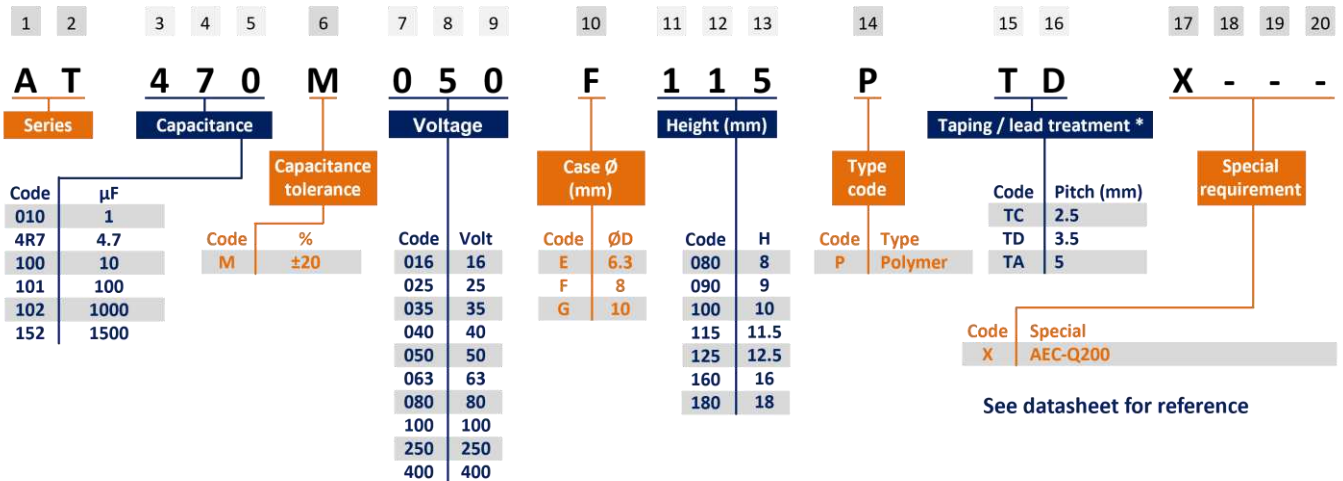

* See chapter taping or lead treatment for further information
Please consult CapXon for further assistance

MARKING - RADIAL HYBRID POLYMER CAPACITORS

Hybrid Polymer Capacitor - Radial type



CapXon: Manufacturer trademark
 47: Nominal capacitance (µF)
 50V: Rated voltage (V) ▪ Standard type
 50X: Rated voltage (V) ▪ AEC-Q200 type
 (-) polarity (Cathode indicate)

AT: AT Series
 003: Production datacode year/week
 (ex. 2020/3rd week)

Top view
Standard type




Top view
AEC-Q200 type



0 03
 → Production week
 → Last digit of the year

TAPING • RADIAL HYBRID POLYMER CAPACITORS • AMMO PACK

Taping • $\phi D \geq 6.3\text{mm}$ • standard lead space

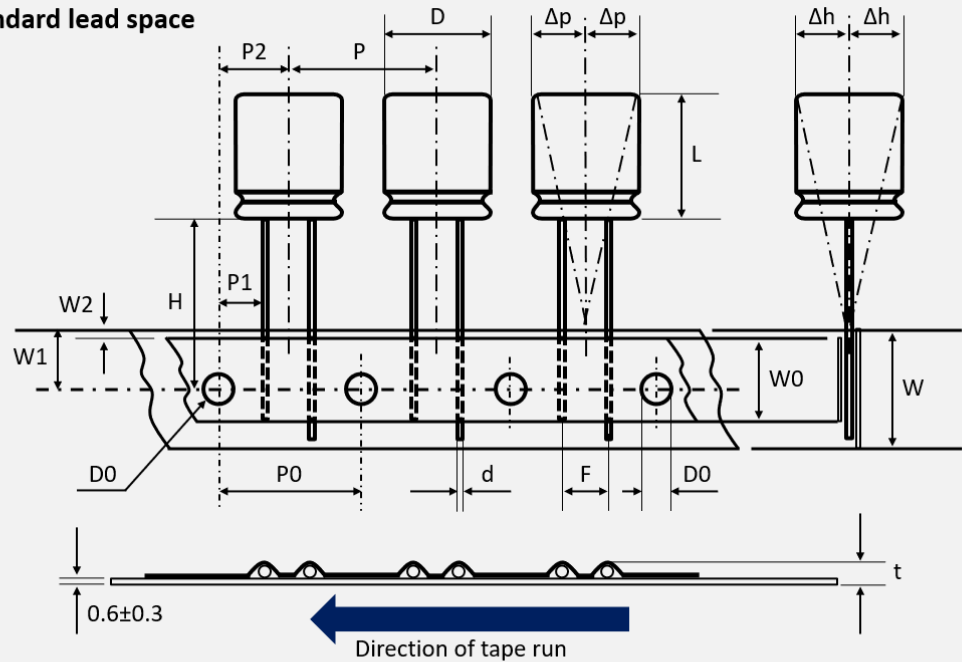

Example


| | | | | | | | | | |
|----------|-------------|--------------|----------|---------------|-------------|--------------|----------------|---------------------|---------|
| A | S | 2 2 1 | M | 0 2 5 | F | 1 1 5 | P | T D | - - - - |
| Series | Capacitance | Tolerance | Voltage | ϕD (mm) | Height (mm) | Type code | Lead treatment | Special requirement | |

All dimensions in mm

| | D | L | d | P | P0 | P1 | P2 | F | W | W0 | W1 | W2 | H | D0 | Δh | Δp | t | Code |
|----------------|-----------|--------------------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----|-------------------|-----------|------------|------------|-----|------|
| Tol | ± 0.5 | - | ± 0.02 | ± 1.0 | ± 0.2 | ± 0.7 | ± 1.3 | ± 0.5 | ± 0.5 | ± 0.5 | ± 0.5 | Max | $+0.75$ -0.5 | ± 0.2 | Max | Max | Max | Code |
| Item | 6.3 | 8 (± 1) | 0.6 | 12.7 | 12.7 | 5.1 | 6.35 | 2.5 | 18 | 11 | 9 | 2 | 18.5 | 4 | 1 | 1 | 1.5 | TC |
| | 8 | 9 (± 1.5) | 0.6 | 12.7 | 12.7 | 4.6 | 6.35 | 3.5 | 18 | 11 | 9 | 2 | 18.5 | 4 | 1 | 1 | 1.5 | TD |
| | | 11.5 (± 1.5) | | | | | | | | | | | | | | | | TA |
| | 10 | 10 (± 1.5) | 0.6 | 12.7 | 12.7 | 3.85 | 6.35 | 5 | 18 | 11 | 9 | 2 | 18.5 | 4 | 1 | 1 | 1.5 | TA |
| | | 12.5 (± 1.5) | TA | | | | | | | | | | | | | | | |
| 16 (± 2) | | 0.8 | TA | | | | | | | | | | | | | | | |
| | | 18 (± 2) | | | | | | | | | | | | | | | | |


The negative lead (cathode) is in the front, i.e. in the direction of tape run.

TAPING • RADIAL HYBRID POLYMER CAPACITORS • AMMO PACK

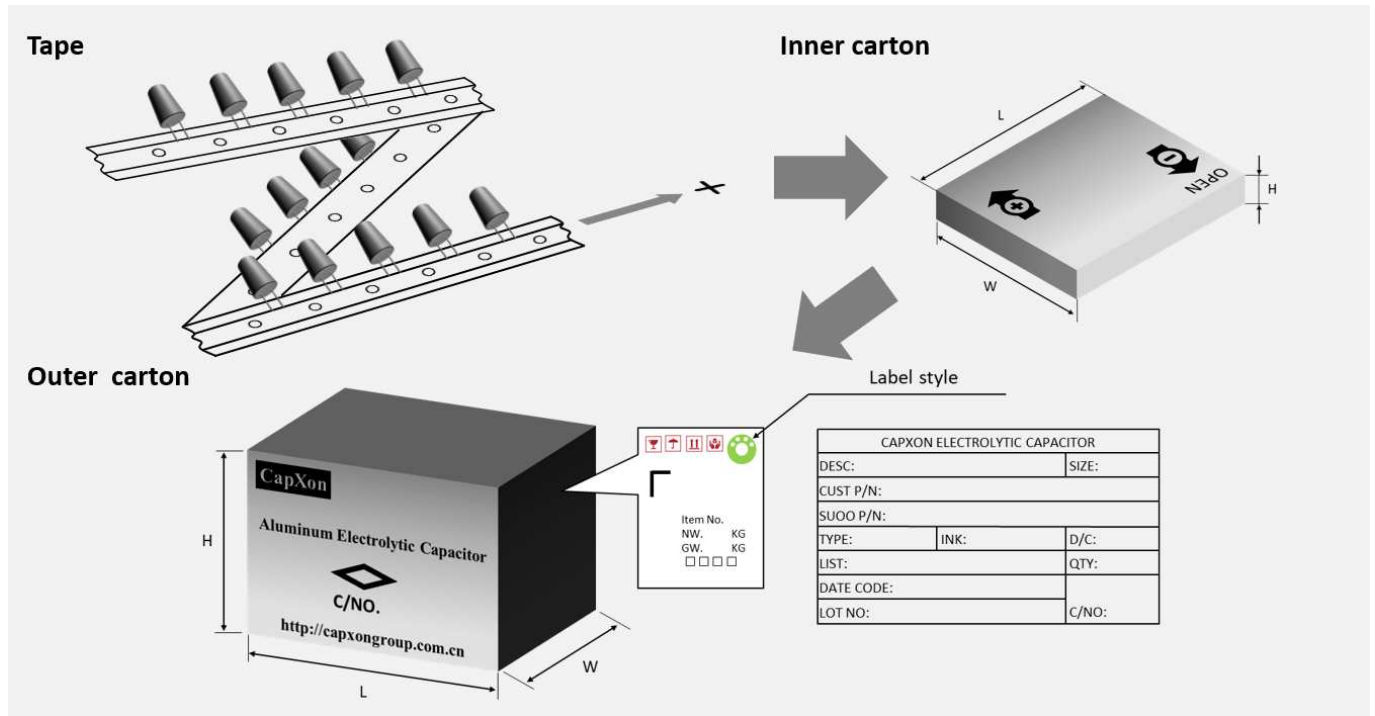


| ∅ D (mm) | Length L (mm) | Inner box quantity (pcs) | Inner box size L x W x H (mm) | Outer box quantity (pcs) | Outer box size L x W x H (mm) | Country of origin | Tariff number |
|----------|---------------|--------------------------|-------------------------------|--------------------------|-------------------------------|-------------------|---------------|
| 6.3 | 8 | 1500 | 331 x 227 x 51 | 15000 | 474 x 343 x 285 | China | 85322200 |
| 8 | 9 to 11.5 | 800 | 331 x 227 x 51 | 8000 | 474 x 343 x 285 | China | 85322200 |
| 10 | 10 to 12.5 | 600 | 331 x 227 x 51 | 6000 | 474 x 343 x 285 | China | 85322200 |
| | 16 | 600 | 331 x 227 x 51 | 6000 | 474 x 343 x 285 | China | 85322200 |
| | 18 | 600 | 331 x 227 x 51 | 6000 | 474 x 343 x 285 | China | 85322200 |

**PACKAGING ▪ RADIAL HYBRID POLYMER CAPACITORS
STRAIGHT LEADS ▪ BULK PACK**




| ∅ D (mm) | Length L (mm) | Inner bag / Inner row (pcs) | Inner box quantity (pcs) | Inner box size L x W x H (mm) | Outer box quantity (pcs) | Outer box size L x W x H (mm) | Country of origin | Tariff number |
|----------|---------------|-----------------------------|--------------------------|-------------------------------|--------------------------|-------------------------------|-------------------|---------------|
| 6.3 | 8 | 600/bag | 7200 | 295 x 181 x 222 | 7200 | 295 x 181 x 222 | China | 85322200 |
| 8 | 9 | 450/bag | 5400 | 295 x 181 x 222 | 5400 | 295 x 181 x 222 | China | 85322200 |
| | 11.5 | 300/bag | 3600 | 295 x 181 x 222 | 3600 | 295 x 181 x 222 | China | 85322200 |
| 10 | 10 | 300/bag | 3600 | 295 x 181 x 222 | 3600 | 295 x 181 x 222 | China | 85322200 |
| | 12.5 | 200/bag | 2400 | 295 x 181 x 222 | 2400 | 295 x 181 x 222 | China | 85322200 |
| | 16 | 200/bag | 2400 | 295 x 181 x 222 | 2400 | 295 x 181 x 222 | China | 85322200 |
| | 18 | 150/bag | 1800 | 295 x 181 x 222 | 1800 | 295 x 181 x 222 | China | 85322200 |


**PACKAGING ▪ RADIAL HYBRID POLYMER CAPACITORS
CUTTED LEADS ▪ BULK PACK**

| ∅ D (mm) | Length L (mm) | Inner bag / Inner row (pcs) | Inner box quantity (pcs) | Cutting height (mm) | Outer box quantity (pcs) | Outer carton quantity (pcs) | Country of origin | Tariff number |
|----------|---------------|-----------------------------|--------------------------|---------------------|--------------------------|-----------------------------|-------------------|---------------|
| 6.3 | 8 | 800/bag | 800/box | ≤ 7 | 9600 | 9600 | China | 85322200 |
| 8 | 9 | 600/bag | 600/box | ≤ 7 | 7200 | 7200 | China | 85322200 |
| | 11.5 | 500/bag | 500/box | ≤ 7 | 6000 | 6000 | China | 85322200 |
| 10 | 10 | 400/bag | 400/box | ≤ 7 | 4800 | 4800 | China | 85322200 |
| | 12.5 | 300/bag | 300/box | ≤ 7 | 3600 | 3600 | China | 85322200 |
| | 16 | 250/bag | 250/box | ≤ 7 | 3000 | 3000 | China | 85322200 |
| | 18 | 200/bag | 200/box | ≤ 7 | 2400 | 2400 | China | 85322200 |



AVAILABLE LEAD TREATMENTS - RADIAL HYBRID POLYMER CAPACITORS

Radial type - standard lead spacing (all dimensions in mm)

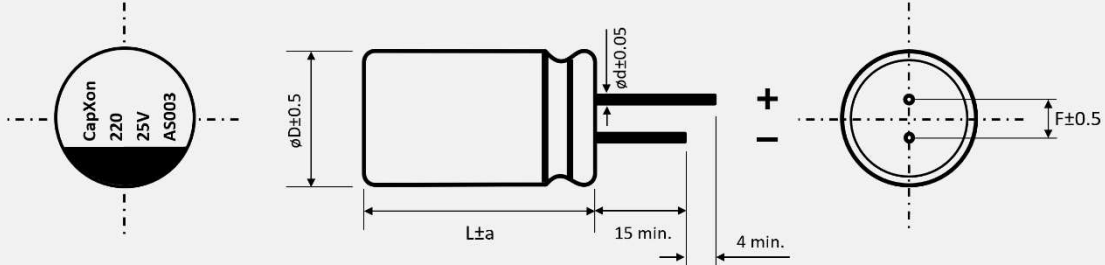

| $\varnothing D$ (mm) | L (mm) | a (mm) | F (mm) | $\varnothing d$ (mm) |
|----------------------|--------|--------|--------|----------------------|
| 6.3 | 8 | 1 | 2.5 | 0.6 |
| 8 | 9 | 1.5 | 3.5 | 0.6 |
| 8 | 11.5 | 1.5 | 3.5 | 0.6 |
| 10 | 10 | 1.5 | 5 | 0.6 |
| 10 | 12.5 | 1.5 | 5 | 0.8 |
| 10 | 16 | 2 | 5 | 0.8 |
| 10 | 18 | 2 | 5 | 0.8 |

Radial type - CA version - cutted leads - standard lead spacing

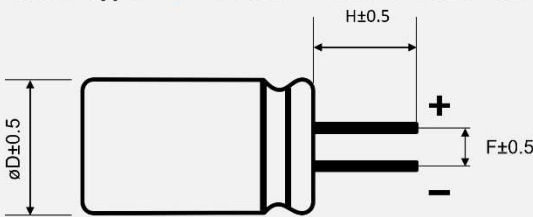


Length „H“ customized. See product code table
customized lead length for further reference.

| | | | |
|----------------------|-----|-----|----|
| $\varnothing D$ (mm) | 6.3 | 8 | 10 |
| F (mm) | 2.5 | 3.5 | 5 |

Example

| | | | | | | | | | |
|----------|-------------|--------------|----------|----------------------|-------------|--------------|----------------|---------------------|---------|
| A | S | 2 2 1 | M | 0 2 5 | F | 1 1 5 | P | CA | - - - - |
| Series | Capacitance | Tolerance | Voltage | $\varnothing D$ (mm) | Height (mm) | Type code | Lead treatment | Special requirement | |




PRODUCT CODE TABLE • CUSTOMIZED LEAD LENGTH

THT type example:

AS series ▪ 220µF ▪ 25V ▪ ±20% ▪ Ø 8mm ▪ L 11.5mm ▪ CA version, cutted leads ▪ P 3.5mm ▪ H 6.0mm

▪ Non-Automotive

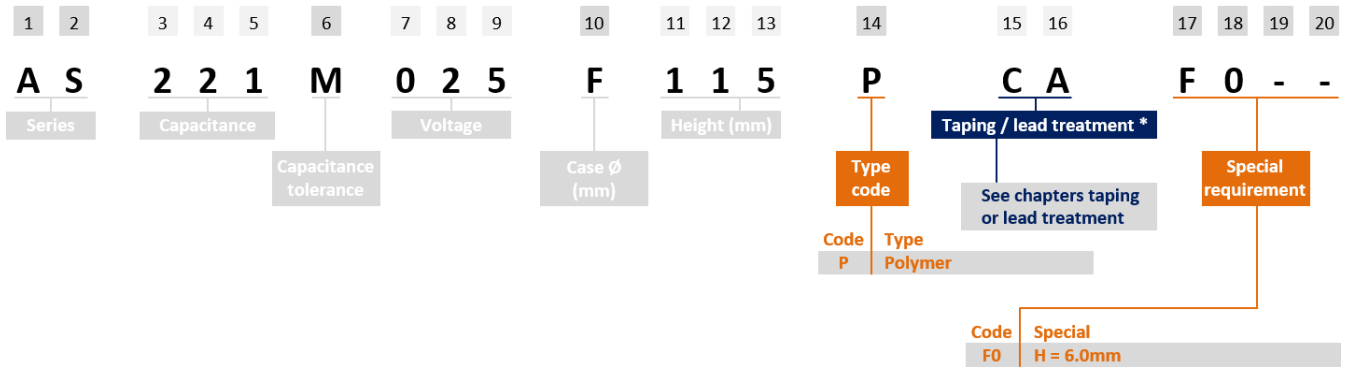

| Product code 17 th digit | H (mm) |
|--|-----------|
| A | 1 |
| B | 2 |
| C | 3 |
| D | 4 |
| E | 5 |
| F | 6 |
| G | 7 |

| Product code 18 st digit | H (mm) |
|--|-----------|
| 0 | 0.0 |
| 1 | 0.1 |
| 2 | 0.2 |
| 3 | 0.3 |
| 4 | 0.4 |
| 5 | 0.5 |
| 6 | 0.6 |
| 7 | 0.7 |
| 8 | 0.8 |
| 9 | 0.9 |

| Example H (mm) | Product code Non-Automotive |
|-------------------|--------------------------------|
| 4.0 | D0 |
| 4.5 | D5 |
| 5.2 | E2 |
| 6.0 | F0 |

| Example H (mm) | Product code Automotive |
|-------------------|----------------------------|
| 4.0 | XD0 |
| 4.5 | XD5 |
| 5.2 | XE2 |
| 6.0 | XF0 |

The 17th digit is according basic ordering of the Latin alphabet and shows the measure "H" in front of the decimal separator. The 18th digit follows the numbering from 0 to 9 and shows the measure "H" after the decimal separator.

Remark for Automotive version: In the case of an AEC-Q200 qualified component, the measure "H" in front of the decimal separator moves to the 18th digit and the measure "H" after the decimal separator to the 19th digit.

GENERAL PRECAUTIONS & GUIDELINES

| | | | |
|--|-----------|---|------------|
| 1. GENERAL PRECAUTIONS & GUIDELINES | 97 | 1.4.3. MOUNTING DIRECTION OF SCREW TYPE CAPACITORS..... | 100 |
| 1.1. GENERAL - ALL TYPES -..... | 97 | 1.4.4. HORIZONTAL MOUNTING..... | 101 |
| 1.1.1. POLARITY | 97 | 1.5. SOLID CONDUCTIVE POLYMER CAPACITORS..... | 101 |
| 1.1.2. OVERVOLTAGE..... | 97 | 1.5.1. APPLICATION RESTRICTIONS..... | 101 |
| 1.1.3. OPERATING TEMPERATURE..... | 97 | 1.5.2. SUDDEN CHARGE AND DISCHARGE | 101 |
| 1.1.4. RIPPLE CURRENT..... | 97 | 2. SOLDERING INSTRUCTIONS | 102 |
| 1.1.5. CHARGE AND DISCHARGING | 97 | 2.1. REFLOW SOLDERING ▪ SMD – HYBRID CONDUCTIVE POLYMER CAPACITORS..... | 102 |
| 1.1.6. SOLDERING CONDITIONS..... | 97 | 2.2. WAVE SOLDERING ▪ ALL RADIAL & SNAP-IN CAPACITORS..... | 103 |
| 1.1.7. MSL – MOISTURE SENSITIVE LEVEL (ONLY FOR SMD TYPES)..... | 97 | | |
| 1.1.8. RESISTANCE TO CHEMICALS AND SOLVENTS FOR WASHING, GLUING, FILLING AND COATING..... | 97 | | |
| 1.1.9. CLEANING AND WASHING | 98 | | |
| 1.1.10. GLUING, FILLING OR COATING | 98 | | |
| 1.1.11. OPERATION AND ENVIRONMENT | 98 | | |
| 1.1.12. MECHANICAL STRESS | 99 | | |
| 1.1.13. STORAGE | 99 | | |
| 1.1.14. DISPOSAL..... | 99 | | |
| 1.2. ALUMINUM ELECTROLYTIC & HYBRID CONDUCTIVE POLYMER CAPACITORS - ALL MOUNTING STYLES -..... | 99 | | |
| 1.2.1. VENT & VENT OPERATION AT EMERGENCY..... | 99 | | |
| 1.2.2. SLEEVE MATERIAL (NOT FOR SMD) | 100 | | |
| 1.3. ALUMINUM ELECTROLYTIC - RADIAL TYPE -..... | 100 | | |
| 1.3.1. PIN CUTTING & BENDING | 100 | | |
| 1.3.2. SOLDERING | 100 | | |
| 1.4. ALUMINUM ELECTROLYTIC CAPACITORS - SCREW TYPE -..... | 100 | | |
| 1.4.1. MAINTENANCE | 100 | | |
| 1.4.2. MOUNTING & INSTALLATION | 100 | | |

1. GENERAL PRECAUTIONS & GUIDELINES

In the following Precautions and Guidelines, CapXon provides instructions and requirements to assure a proper handling and desired performance of capacitors. Firstly, all general information is given, which applies to all technologies. The following chapters provides additional instructions specifically about technology and mounting style, which completes the full set of instructions.

1.1. GENERAL - ALL TYPES -

1.1.1. POLARITY

All conventional Electrolytic Capacitors have a polarity due to the internal construction. This polarity is marked on the component by printing on the top of component or on the sleeve of Aluminum Electrolytic Capacitors, including Radial, Snap-In and Screw types.

Any reverse voltage can cause short circuit breakdown of capacitor or leakage of electrolyte. Electrolytic Capacitors isn't designed for AC-voltage supply and only meant for DC-voltage applications.

For an application where polarity in circuit can be reversed or unknown, specific bi-polar aluminium electrolytic capacitors shall be used. We offer such components within our product range.

1.1.2. OVERVOLTAGE

Overvoltage can damage the capacitor and can cause a drastic increase in leakage current, which possibly shortens the lifetime of the capacitor. In a worst case, short circuit failure mode can happen. As a result, do not apply any continuous or temporary overvoltage.

The applied operating voltage, which is applied to the capacitor, should not exceed the rated voltage of the capacitor.

1.1.3. OPERATING TEMPERATURE

Only operate the capacitor within the limits of allowed temperature range, which is specified by datasheet. Be aware that the sum of thermal stress by ambient condition plus electrical stress is the main driving factor for aging. As the thermal stress level gets higher, the expected capacitor lifetime would be lower.

A drop in applied temperature, ambient condition or cooling within application can enlarge the expected lifetime of

the capacitor. For details, please see further documentation of lifetime estimation.

1.1.4. RIPPLE CURRENT

The applied ripple current shall not exceed the stated max. ripple current I_R on the datasheet at the specific frequency.

When capacitors are overstressed by ripple, it can generate massive heat inside the capacitor, which can result in deterioration, vent operation or capacitor breakage.

1.1.5. CHARGE AND DISCHARGING

Frequent and quick charge / discharge generates heat inside the capacitor and can cause possible increase of leakage current, reduction of the expected lifetime, decrease of capacitance, vent operation or breakage.

For such applications please see design rules or consult our technical support for assistance.

1.1.6. SOLDERING CONDITIONS

For recommended reflow solder profile, please see additional information at Section 2. Soldering Instructions.

Soldering by vapor phase for SMD types or any hand soldering are not recommended. No permission is released by CapXon side either. In case of such a usage, customer need to validate solder result and applied component stress within their own manufacturing process.

1.1.7. MSL – MOISTURE SENSITIVE LEVEL (ONLY FOR SMD TYPES)

Our standard SMD components are rated according to JEDEC J-STD020 with MSL1. Construction of this part does not include hygroscopic critical materials and are not prone to delamination or popcorn effects. Only SMD MLPC types of the Solid Conductive Polymer components have MSL3. Moreover, only this type requires additional actions or specific handling in factory floor by customer such as handling or storing the goods after opening the package in accordance to JEDEC J-STD020.

1.1.8. RESISTANCE TO CHEMICALS AND SOLVENTS FOR WASHING, GLUING, FILLING AND COATING

Due to the wide variety of suppliers and different chemical formulas of washing, gluing, filling and coating materials, the individually used material and appliance process need to be validated by customer itself. It is not possible to provide any global material usage approval from our side.

CapXon can provide additional information, including combination of chemicals which could be critical to the component behavior and can support measurements of component performance after appliance of washing, gluing, filling or coating materials. For specific support, please kindly contact our technical support for further advices.

1.1.9. CLEANING AND WASHING

Do not wash the assembled capacitors with the following cleaning agents:

- **Xylene**
 - can cause deterioration of the rubber seal material
- **Halogenated solvents**
 - can cause corrosion and electrical failure modes
- **Petroleum based solvents**
 - can cause degeneration of the rubber seal material
- **Alkali based solvents**
 - can cause corrosion and dissolving of aluminum can
- **Acetone**
 - component marking possibly dissolve

After finishing cleaning and washing, the below points need to be verified by customer:

Dry all solvents properly from PCB as well as capacitor surface sufficiently and apply air blower or air knife, with temperatures within the temperature range of the product specification, if needed.

Monitor pH value, conductivity, specific gravity and water content of cleaning solvents to be sure of possible contaminations and pollution. Contaminations can negatively affect the performance of the capacitor.

1.1.10. GLUING, FILLING OR COATING

It is not allowed to use any gluing (adhesives), filling or coating materials, which contains halogenated solvents. Halogen ions are critical, because they can diffuse or creep in the capacitor through rubber sealing and can possibly damage the internal capacitor element /structure result in serious failure modes for the capacitor.


Additionally, please pay attention to the following points:

- Make sure that the surface of capacitor and the area between component bottom / rubber sealant is dry and clean before appliance of gluing, filling or coating material. It is important to avoid any contamination with chemical residues (e.g. flux residues, cleaning).
- Please follow and meet the stated gluing, coating, filling, heating and curing instructions from manufacturer or supplier of such materials. Be aware of possi-

ble shrinkage of such materials. Verify that the hardening was properly done and that no solvents / agents do remain.

- There should be no excessive heat nor mechanical pressure /stress at any stages from the production on customer side. Be aware of the possible material shrinkage of used material. High material shrinkage which leads to damage on capacitor is not CapXon's responsibility.
- The used materials of gluing, coating or filling can possibly react with the marking of component and this can change optical appearance such as the appearance and legibility.
- If the rubber seal surface is fully covered by gluing, filling or coating material, it is no longer possible to have a natural diffusion of gas between the inside of the capacitor and the ambient. So, to avoid such situation, it's strongly recommended to block maximum 80% of the sealed section on the bottom side of the capacitor.

Please find the example below of how gluing could be applied on Radial and Snap-In types.

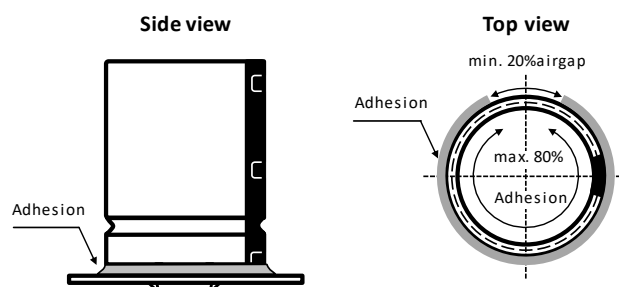

Gluing reference example of a Snap-In capacitor

1.1.11. OPERATION AND ENVIRONMENT

As long as the application is powered, in operation and cap is not discharged, the user is never permitted to touch the electric terminals of the capacitor directly or to bridge the terminals by hand or any other conductive liquid or solid material. Otherwise, a short circuit of terminals can happen and a hard discharge can damage capacitor / application as well as it can harm the operator.

Within operation, please avoid the following environmental conditions to assure proper capacitor operation:

- high vibration, shocks or mechanical stress. For tested and allowed conditions, please see available references or contact us for details
- avoid direct sunlight, ozone and any kind of radiation or ultraviolet rays
- corrosive or toxic gases (e.g. ammonium, chlorine)

and compounds, bromine and compounds, hydrogen sulfide, sulfuric acid)

- ambient with high amount of damp condensation, water or types of oil

1.1.12. MECHANICAL STRESS

Best possible, avoid mechanical stress for the capacitor and do not apply any excessive mechanical stress to the lead wire pins or terminal.

After mounting, do not lift nor carry the PCB assembly by just grabbing the capacitor to pick up the board.

1.1.13. STORAGE

In case of long-term storage without applying voltage to the capacitor, leakage current tends to increase.

By applying the rated voltage before usage, the dielectric layer of aluminium oxide and leakage current can be stabilized.

If the capacitor is for more than 12 months, it is recommended to apply the DC rated voltage V_R for 30 minutes through 1k Ω protective series resistor.

The storage conditions for storage on customer side should be monitored and controlled to a temperature of 5°C up to 35°C and less than 75% rel. humidity.

1.1.14. DISPOSAL

Please follow your local governmental and organizational restrictions for disposal and if needed, contact your local responsible for correct handling.

In case of incineration, punch holes in the aluminum can in advanced to avoid explosion of capacitor and then burn with at least 800°C, otherwise it can result toxic gas.

1.2. ALUMINUM ELECTROLYTIC & HYBRID CONDUCTIVE POLYMER CAPACITORS - ALL MOUNTING STYLES -


1.2.1. VENT & VENT OPERATION AT EMERGENCY

As a safety feature, most our regular electrolytic capacitors have a so-called vent, which is a pre-determined breaking point. In case of overstressed component, it can lead to internal gassing and due to this an internal overpressure will

result in vent operation. So, the vent will open to release such pressure and gas can become visible. If user detects vent operation or gassing out of the capacitor when operating, disconnect the application immediately from power supply to turn it off directly. If it can't be turned off, the capacitor or the conductive liquid / gas of electrolyte can result in short-circuits, which can dramatically damage the application.

Please notice to avoid being near with body or face above or in direction of capacitors vent when powered. When the running application is overstressed, gas leakage by vent is possible. By this gas with temperatures higher than 100°C can occur and can hurt human body and face. In such an event, if contact with skin, wash it immediately with plenty of water and soap. If contact with eyes, rinse immediately (e.g. eye shower) with plenty of water. If gas is inhaled, gargle right away with plenty of water. For all three cases, please consult a doctor for medical advices.

For proper operation of vent, consider space between the vent and covering surfaces (e.g. housing) as stated at the table below, it is strongly recommended for your mechanical construction / build-up of your product:

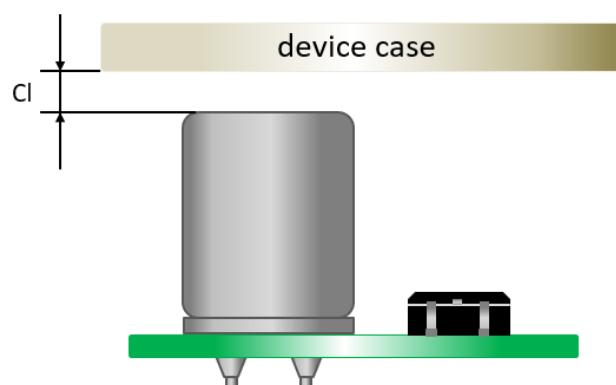

Minimum distance to be observed for the safe operation of the capacitor

| Case diameter ϕ | Clearance distance Cl |
|----------------------|-----------------------|
| 6.3mm to 16mm | Min. 2mm |
| 18mm to 35mm | Min. 3mm |
| ≥ 40 mm | Min. 5mm |

Recommended minimum clearance distance between topline capacitor and device case

If such a space is not provided, the vent will not operate completely or even cannot open in case of overpressure.

Case sizes which are smaller than 6.3mm in diameter have no vent on top, for these no space need to be considered.

1.2.2. SLEEVE MATERIAL (NOT FOR SMD)

The standard sleeve material for the majority of our Radial, Snap-In and Screw mounting capacitors is PET and for some series PVC is used as sleeve material. When sleeve is exposed to xylene, toluene or similar and afterwards exposed to high heat, the sleeve may be cracked or damaged.

The sleeve is not used as insulating material or layer and does not insulate capacitor to surroundings. For needed insulation, further actions need to be considered by customer and please follow our recommended design rules.

Sleeves are applied for all Aluminum Electrolytic Capacitors with Radial, Snap-In or Screw mounting and if desired for further customized solutions.

1.3. ALUMINUM ELECTROLYTIC - RADIAL TYPE -

1.3.1. PIN CUTTING & BENDING

Please take absolute care when cutting or bending pins, that the pin is fixed mechanically in direction of rubber sealant. It is necessary that the mechanical force while cutting and bending, which results in pulling or pressing force on pin, does not stress the inner construction of capacitor element or to damage the rubber sealant. Excessive pulling or pressing force on the pin with missing fixation can result in damage of internal pin to capacitor element connection and also the sealing can be weakened. So, please take care to assure appropriate cutting and bending. Do not pre-damage the capacitors and shorten their lifetime performance by incorrect handling.

1.3.2. SOLDERING

For recommended wave solder profile, please see additional solder instruction at section 2.5.

Improper soldering conditions may shrink or break the sleeve. Additionally, excessive heat can damage the internal capacitor element as terminals and lead wires conduct heat into the capacitor.

1.4. ALUMINUM ELECTROLYTIC CAPACITORS - SCREW TYPE -

1.4.1. MAINTENANCE

A regular inspection is recommended when screw capacitors are used at industrial applications. Before inspection, make sure to turn off the power, discharge screw capacitors carefully and do not apply mechanical force or pressure to the terminal to avoid damage. Inspection items are as stated below:


- Check on outer damage, deformation and electrolyte leakage
- Check electrical performance: leakage current, capacitance, DF value and other product specifications. If there is any abnormality detected, make sure a capacitor replacement will be done and handled properly

1.4.2. MOUNTING & INSTALLATION

Make sure capacitors rated capacitance, rated voltage and polarity is according to spec before installation. Please confirm that capacitors and circuit board terminal pitch is consistent to each other before installation. It may cause stress to internal capacitor element through the terminal. If the pitch is different, mounting was done nevertheless and strong mechanical stress was applied. In such case, this can cause short-circuit and other failure modes. Machine automated force and lead torque strength must be controlled properly when mounting happens with automated machine.

1.4.3. MOUNTING DIRECTION OF SCREW TYPE CAPACITORS


To avoid screw capacitor breakage / explosion, it is not allowed to be mounted with the safety vent downwards to ground, because vent can't function properly when mounted with vent to bottom side and existing gas pressure cannot release properly. Recommended mounting method is shown as figure below, to avoid any safety vent downwards installation. So, capacitor should be mounted with screw terminals up as shown below:

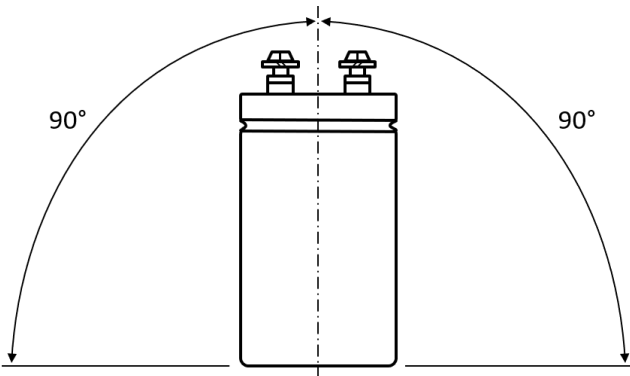

Recommended mounting direction

1.4.4. HORIZONTAL MOUNTING

For horizontal mounting following mounting is strongly recommended. Anode terminal in upper position with safety vent in horizontal position as figure below on left side or safety vent in upper position with anode and cathode terminal in horizontal as figure below on right side.

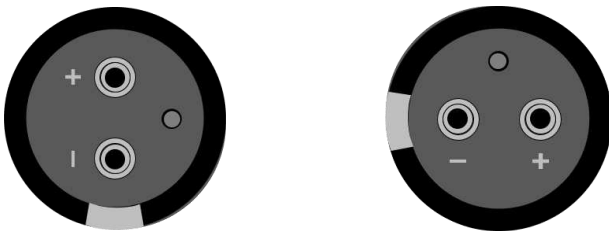

Recommended mounting position, also in accordance to EIAJ RCR-2367C

It may not damage capacitors directly, but an electrolyte leakage may happen, if installed by other mounting method in horizontal direction.

1.5. SOLID CONDUCTIVE POLYMER CAPACITORS

1.5.1. APPLICATION RESTRICTIONS

The leakage current of Solid Conductive Polymer Capacitors may vary which depends on thermal stress.

Please don't use Solid Conductive Polymer Capacitors in the following types of applications / circuits:

- High-impedance circuits - which are meant to sustain voltages
- Coupling circuits

- Time constant circuits - in addition to the leakage current fluctuation, capacitance may also fluctuate, which depends on operational temperature and humidity. The fluctuation of the capacitance may cause problems, if it is used as a time constant capacitor, which is extremely sensitive to the fluctuation of the capacitance. So, do not use it as a time constant capacitor.
- Other circuits - which are significantly affected by leakage current. If you want to use 2 or more capacitors in a series connection, please contact us before usage.

1.5.2. SUDDEN CHARGE AND DISCHARGE

Do not use the capacitor in circuits when capacitor is repetitively charged and discharged rapidly. If repetitively and rapid charging and discharging stresses the capacitor, it can result in reduction of capacitance or may cause further damage due to internal heating. The usage of a protective circuit is recommended to ensure reliability, when rush currents exceeds 10 times of capacitors allowed max. ripple current I_r , but never more than max. 10A. When measuring the leakage current, a protective resistor (1 kΩ) must be inserted to the circuit during the charge and discharge.




2. SOLDERING INSTRUCTIONS

In the following sections CapXon’s leadfree solder profiles are stated in detail.

2.1. REFLOW SOLDERING • SMD – HYBRID CONDUCTIVE POLYMER CAPACITORS

Recommended reflow soldering conditions

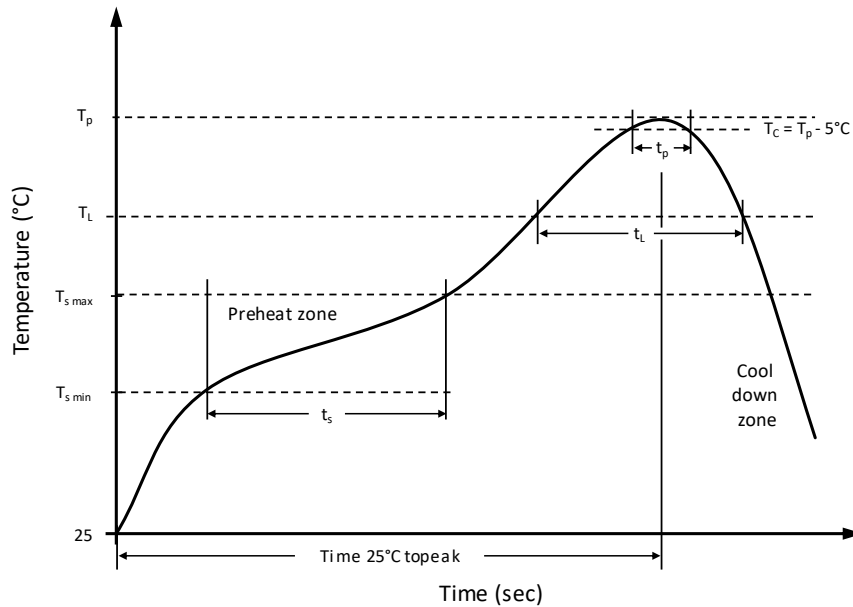

Classification of reflow soldering profile


| Profile Features | | Value |
|--|--------------|---|
| Preheat temperature min. | $T_{s\ min}$ | 160 °C |
| Preheat temperature max. | $T_{s\ max}$ | 200 °C |
| Preheat time t_s from $T_{s\ min}$ to $T_{s\ max}$ | t_s | 120 seconds |
| Ramp-up rate (T_L to T_p) | | max. 3 °C/second |
| Liquidous temperature | T_L | 217 °C |
| Time t_L maintained above T_L | t_L | See reference table below for proper \varnothing Diameter |
| Peak package body temperature | T_p | See reference table below for proper \varnothing Diameter |
| Timeframe of within 5°C below and up to max actual peak body temperature | t_p | See reference table below for proper \varnothing Diameter |
| Ramp-down rate (T_L to T_p) | | max. 6 °C/second |
| Time 25°C to peak temperature | | max. 8 minutes |

* Limitations of ramp rates to JEDEC-J-STD020E


Package classification reflow temperature for SMD – Hybrid Conductive Polymer Capacitors

| \varnothing Diameter (mm) | Time above 200°C | t_L Time above 217°C | Time above 230°C | T_p Peak Temperature (°C) | t_p Timing (seconds) | Allowed Reflow Runs |
|-----------------------------|------------------|------------------------|------------------|-----------------------------|------------------------|---------------------|
| ≤ 6.3 | 70 sec. max | 40 sec. max. | 30 sec. max. | 260 | 5 | max. twice |
| ≥ 8 | 70 sec. max | 40 sec. max. | 30 sec. max. | 245 | 10 | max. twice |
| | 70 sec. max | 40 sec. max. | 30 sec. max. | 260 | 5 | only once |

2.2. WAVE SOLDERING - ALL RADIAL & SNAP-IN CAPACITORS



Recommended wave soldering conditions

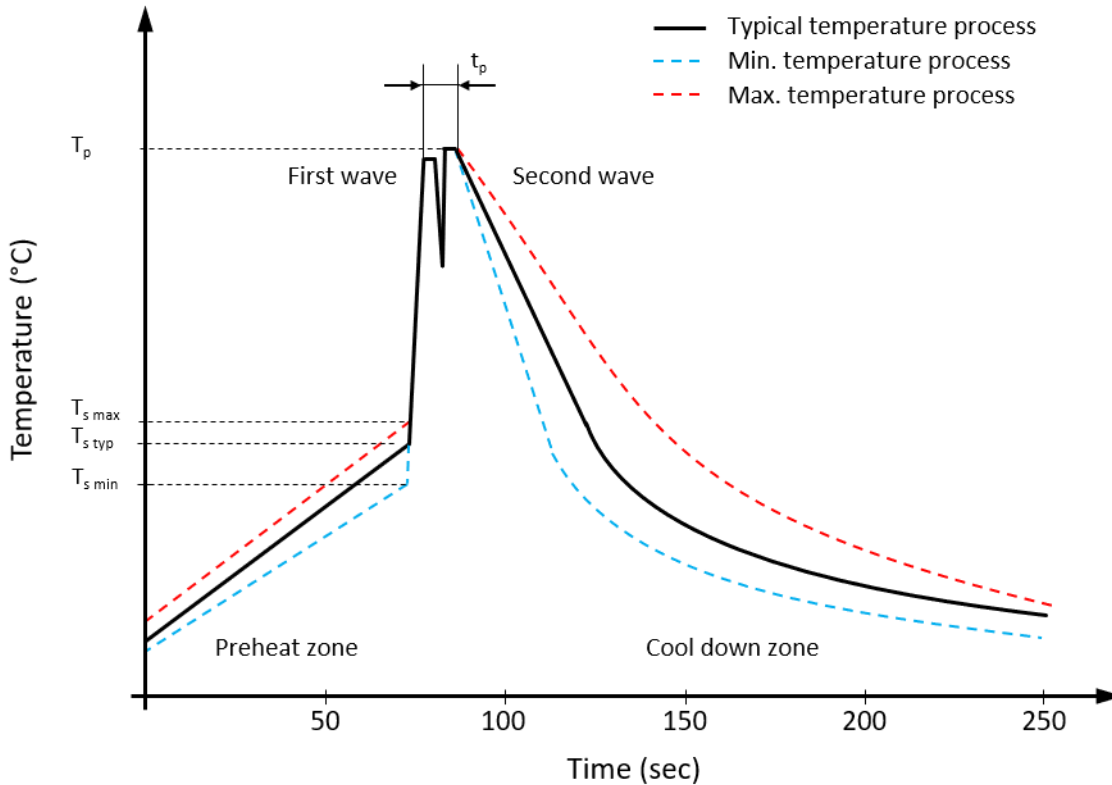

Classification wave soldering profile - Refer to EN 61760-1: 2006

| Profile Features | | Value - Pb-free Assembly | Value - Sn-Pb Assembly |
|--|--------------|--|--|
| Preheat temperature min. | $T_{s\ min}$ | 100 °C | 100 °C |
| Preheat temperature typical | $T_{s\ typ}$ | 120 °C | 120 °C |
| Preheat temperature max. | $T_{s\ max}$ | 130 °C | 130 °C |
| Preheat time t_s from $T_{s\ min}$ to $T_{s\ max}$ | t_s | 70 seconds | 70 seconds |
| Peak temperature | T_p | 245 °C ~ 260 °C | 235 °C ~ 260 °C |
| Time of actual peak temperature | t_p | Max. 10 seconds Max. 5 second each wave | Max. 10 seconds Max. 5 second each wave |
| Ramp-down rate min. | | ~ 2 °C/second | ~ 2 °C/second |
| Ramp-down rate typical | | ~ 3.5 °C/second | ~ 3.5 °C/second |
| Ramp-down rate max. | | ~ 5 °C/second | ~ 5 °C/second |
| Time 25°C to 25°C | | 4 minutes | 4 minutes |

CAPXON

IATF 16949

AEC-Q200

ISO 9001

ISO 14001

QC 080000



www.capxongroup.com

Taiwan

CapXon Technology Limited Taiwan Branch
5F, No. 157, Datong Road, Sec. 2, XiZhi Dist.,
New Taipei City, 22183, Taiwan R. O. C.
+886-2-8692-6611
sales@capxon-taiwan.com

China

CapXon Electronic (Shen-Zhen) Co., Ltd.
Fengbin Industrial Park A102, Tangwei Community,
Fenghuang street, Guangming District, (No. 4132 Songbai Rd.)
Shenzhen 518106, China
+86-755-2717-7888
sales@capxon.com.cn

South Korea

CapXon Korea Office
RM309, Metrokhan, 239 Pyeongchon-daero, Dongan-gu,
Anyang-si, Gyeonggi-do, Korea, 14047
sales@capxon-korea.com

Southeast Asia

CapXon Singapore Office
51 Goldhill Plaza #07-10/11
Singapore 308900
+65-3-1572870
sales@capxon-asia.com

United States of America

CapXon US Office
New York +1-607-846 4546
sales@capxon-usa.com

Europe

CapXon Europe Office
Schwalbenweg 11
72793 Pfullingen, Germany
+49-7121-1452700
sales@capxon-europe.com

The content of this catalog is created with utmost care. However, CapXon does not guarantee the accuracy, completeness and timeliness of the content provided. Specifications subject to change without notice.

