

Product Overview

The QPL9504 is a flat gain, high-linearity, ultra-low noise amplifier in a small 2 x 2 mm surface-mount package. At 5.5 GHz, the amplifier provides 0.76 dB noise figure with 21.6 dB gain and +34 dBm OIP3 while drawing 55 mA bias current. The LNA can be biased from a single positive supply ranging from 3.3 to 5 volts. The device is housed in a green/RoHS-compliant industry-standard 2x2 mm DFN package.

The QPL9504 is bias adjustable and requires minimal external components to operate. It also has a power down control capability integrated into the die for TDD applications.




8 Pin 2X2 mm DFN Package

Key Features

- 0.6-6 GHz Operational Bandwidth
- Ultra-low noise figure, 0.76 dB NF @ 5.5 GHz
- 34 dBm OIP3 at 55 mA I_{DD}
- 21.6 dB Gain
- Bias adjustable for linearity optimization
- Unconditionally stable
- Shut-down mode pin with 1.8V logic
- Maintains OFF state with high Pin drive

Functional Block Diagram

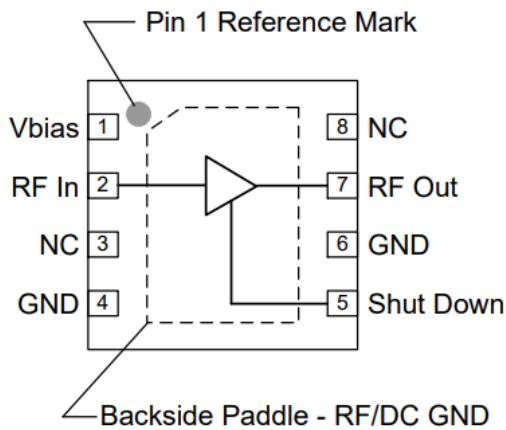

Top View

Applications

- 5G m-MIMO
- Repeaters / DAS
- Mobile Infrastructure
- LTE, LTE-U/LAA
- General Purpose Wireless
- TDD or FDD systems

Ordering Information

Part No.	Description
QPL9504TR7	2500 pieces on a 7" reel
QPL9504EVB-01	0.6-6.0 GHz Evaluation Board

Absolute Maximum Ratings

Parameter	Rating
Storage Temperature	-65 to +150°C
Supply Voltage (V _{DD})	7 V
RF Input Power, CW, 50Ω, T=25°C	22 dBm
RF Input Power, CW, OFF State, T=25°C	22 dBm

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device.

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
Supply Voltage (V _{DD})	+3.3	+5	+5.5	V
T _{CASE}	-40		+105	°C
T _j for >10 ⁶ hours MTTF			190	°C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions. Application of conditions to the device outside the Recommended Operating Conditions may reduce device reliability and performance.

Electrical Specifications

Test conditions unless otherwise noted: V_{DD}=+5 V, Temp.=+25 °C, 50 Ω system

Parameter	Conditions	Min	Typ	Max	Units
Operational Frequency Range		600		6000	MHz
Test Frequency			5500		MHz
Gain			21.6		dB
Input Return Loss			18.0		dB
Output Return Loss			9.3		dB
Noise Figure ⁽¹⁾			0.76		dB
Output P1dB			+18.7		dBm
Output IP3	P _{out} =+2 dBm/tone, Δf=1 MHz		+34.0		dBm
Power Shutdown Control (pin 5)	On state	0		0.63	V
	Off state (Power down)	1.17		V _{DD}	V
Current, I _{DD}	On state		55		mA
	Off state (Power down)		4.2		mA
Shutdown pin current, I _{SD}	V _{PD} ≥ 1.17 V		100		μA
Switching Time (LNA ON)	50% DC to 0.5dB settled power/gain		70		ns
Switching Time (LNA OFF)	50% DC to -20dB from starting power/gain		50		ns
Thermal Resistance	Channel to case		74		°C/W

Notes:

1. Input trace loss de-embedded from NF data.

S-Parameters

Test Conditions: $V_{DD}=+5\text{ V}$, $I_{DD}=55\text{ mA}$ (typ.), $T=+25^{\circ}\text{C}$, unmatched $50\ \Omega$ system, calibrated to device leads

Freq (GHz)	S11 (dB)	S11 (ang)	S21 (dB)	S21 (ang)	S12 (dB)	S12 (ang)	S22 (dB)	S22 (ang)
1.0	-7.3	-90	23.1	86	-31.4	8	-15.4	-37
1.1	-7.7	-97	22.7	80	-31.2	6	-15.8	-38
1.2	-8.1	-103	22.3	73	-31.0	5	-16.2	-37
1.3	-8.5	-108	21.9	67	-30.9	3	-16.5	-36
1.4	-8.8	-114	21.6	61	-30.7	1	-16.7	-36
1.5	-9.1	-119	21.3	56	-30.6	0	-16.8	-35
1.6	-9.4	-123	21.0	50	-30.5	-2	-16.8	-34
1.7	-9.6	-128	20.8	45	-30.4	-4	-16.7	-33
1.8	-9.8	-132	20.5	39	-30.3	-6	-16.5	-33
1.9	-10.0	-136	20.3	34	-30.3	-8	-16.3	-32
2.0	-10.1	-140	20.2	29	-30.3	-10	-15.9	-32
2.1	-10.2	-143	20.0	24	-30.2	-12	-15.6	-33
2.2	-10.3	-147	19.9	19	-30.2	-14	-15.2	-34
2.3	-10.4	-150	19.8	14	-30.2	-16	-14.8	-35
2.4	-10.4	-153	19.7	9	-30.2	-18	-14.3	-36
2.5	-10.4	-156	19.6	4	-30.3	-21	-13.9	-37
2.6	-10.4	-159	19.6	-1	-30.3	-23	-13.4	-39
2.7	-10.3	-162	19.6	-6	-30.4	-25	-13.0	-41
2.8	-10.2	-165	19.6	-11	-30.5	-28	-12.5	-44
2.9	-10.1	-167	19.6	-16	-30.6	-31	-12.0	-46
3.0	-10.0	-170	19.6	-21	-30.8	-33	-11.5	-49
3.1	-9.8	-173	19.7	-26	-30.9	-36	-11.0	-52
3.2	-9.6	-176	19.7	-31	-31.1	-39	-10.5	-55
3.3	-9.5	-179	19.8	-36	-31.3	-42	-10.0	-58
3.4	-9.3	179	19.9	-41	-31.5	-45	-9.4	-61
3.5	-9.3	176	20.0	-46	-31.7	-48	-8.9	-63
3.6	-9.1	173	20.1	-52	-32.0	-52	-8.4	-67
3.7	-8.8	169	20.2	-57	-32.4	-55	-7.9	-71
3.8	-8.5	166	20.3	-63	-32.8	-59	-7.4	-75
3.9	-8.2	163	20.4	-69	-33.2	-63	-7.0	-80
4.0	-7.9	159	20.5	-75	-33.7	-67	-6.5	-85
4.1	-7.6	155	20.6	-81	-34.2	-72	-6.0	-90
4.2	-7.3	152	20.7	-87	-34.9	-76	-5.6	-96
4.3	-7.0	148	20.7	-94	-35.6	-81	-5.1	-101
4.4	-6.8	144	20.8	-100	-36.4	-87	-4.7	-107
4.5	-6.5	140	20.8	-107	-37.4	-92	-4.3	-113
4.6	-6.3	136	20.7	-113	-38.4	-98	-4.0	-119
4.7	-6.2	132	20.7	-120	-39.6	-105	-3.7	-125
4.8	-6.0	128	20.6	-127	-41.0	-112	-3.4	-131
4.9	-5.9	124	20.4	-134	-42.5	-122	-3.2	-137
5.0	-5.9	121	20.2	-140	-44.4	-132	-3.0	-143
5.1	-5.9	117	20.0	-146	-46.3	-144	-2.8	-148
5.2	-5.9	113	19.8	-153	-48.3	-162	-2.7	-154
5.3	-6.0	110	19.5	-159	-49.7	177	-2.6	-159
5.4	-6.1	107	19.2	-165	-49.9	153	-2.6	-164
5.5	-6.2	104	18.9	-171	-49.3	131	-2.5	-168
5.6	-6.4	102	18.6	-176	-48.0	116	-2.5	-173
5.7	-6.6	99	18.3	-179	-46.8	106	-2.5	-177
5.8	-6.8	97	17.9	-173	-45.6	99	-2.5	-179
5.9	-7.0	95	17.6	-169	-44.7	94	-2.5	-175
6.0	-7.3	93	17.3	-164	-43.8	90	-2.6	-172

Noise Parameters

Test Conditions: $V_{DD}=+5$ V, $I_{DD}=55$ mA (typ.), $T=+25^{\circ}\text{C}$, unmatched 50 ohm system, calibrated to device leads

Freq (GHz)	NF _{min} (dB)	GammaOpt (mag)	GammaOpt (deg)	r _n (Ω)
4.0	0.50	0.10	-159	0.060
4.1	0.50	0.14	173	0.047
4.2	0.50	0.19	-169	0.038
4.3	0.50	0.14	-142	0.054
4.4	0.51	0.17	-173	0.043
4.5	0.50	0.21	-157	0.043
4.6	0.51	0.23	-157	0.039
4.7	0.50	0.22	-160	0.042
4.8	0.51	0.23	-151	0.043
4.9	0.52	0.20	-155	0.048
5.0	0.55	0.20	-154	0.049
5.1	0.56	0.30	-143	0.040
5.2	0.57	0.26	-144	0.048
5.3	0.60	0.30	-152	0.046
5.4	0.60	0.32	-144	0.044
5.5	0.61	0.25	-146	0.059
5.6	0.63	0.30	-144	0.053
5.7	0.63	0.32	-137	0.052
5.8	0.66	0.32	-137	0.058
5.9	0.69	0.32	-130	0.075
6.0	0.72	0.31	-136	0.065

Typical Performance – QPL9504EVB-01 (Optimized for 5-6 GHz)

Test conditions unless otherwise noted: $V_{DD} = +5\text{ V}$, $I_{DD} = 55\text{ mA}$ (typ.), Temp = $+25^\circ\text{C}$


Parameter	Conditions	Typical Values			Units
Frequency		5000	5500	6000	MHz
Gain		20.6	21.6	20.0	dB
Input Return Loss		20.0	18.0	14.0	dB
Output Return Loss		5.0	9.3	6.2	dB
Output P1dB		18.2	18.7	17.5	dBm
OIP3	Pout=+2 dBm/tone, $\Delta f=1\text{ MHz}$	33.4	34.0	34.4	dBm
Noise figure ⁽¹⁾		0.71	0.76	0.85	dB

Notes:

1. Input trace loss de-embedded from NF data.


Performance Plots – QPL9504EVB-01 (Optimized for 5-6 GHz)

Test conditions unless otherwise noted: $V_{DD} = +5\text{ V}$, $I_{DD} = 55\text{ mA}$.

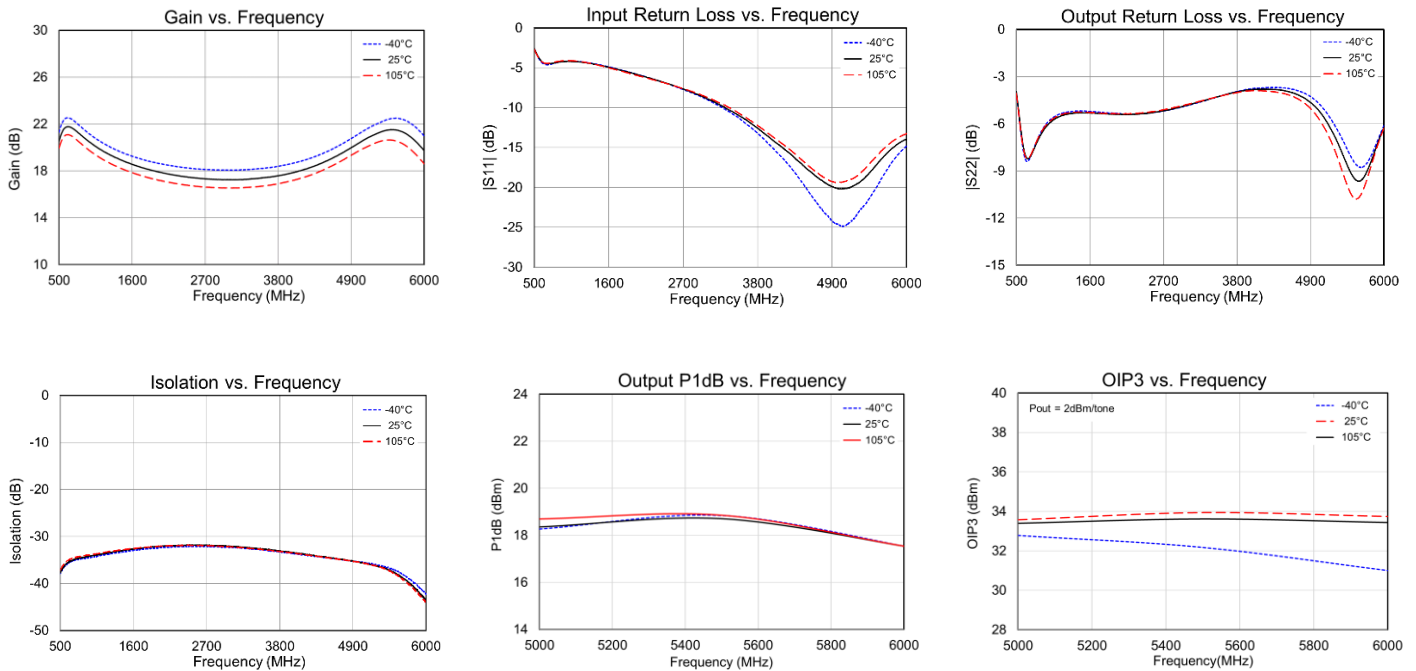

Performance Plots – QPL9504EVB-01 (Optimized for 5-6 GHz) Continued


Test conditions unless otherwise noted: $V_{DD} = +5\text{ V}$, $I_{DD} = 55\text{ mA}$.

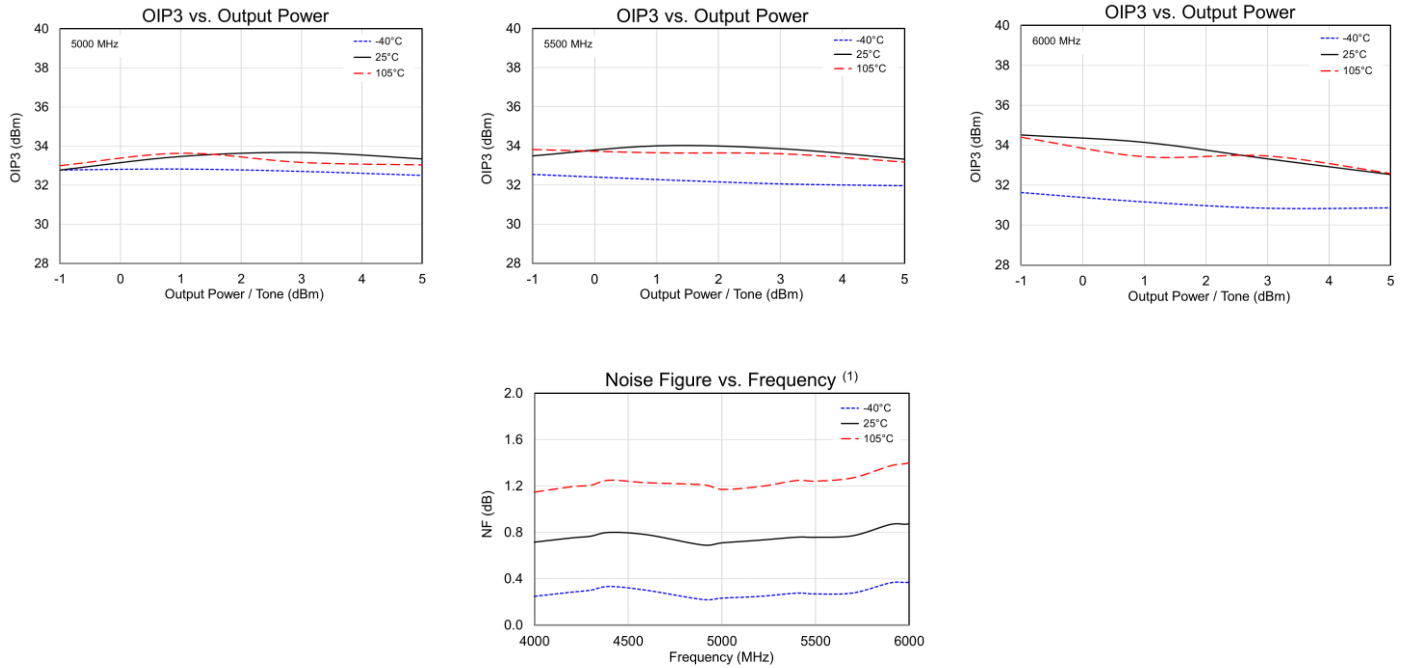

Notes:

1. Input trace loss de-embedded from NF data.

Pad Configuration and Description

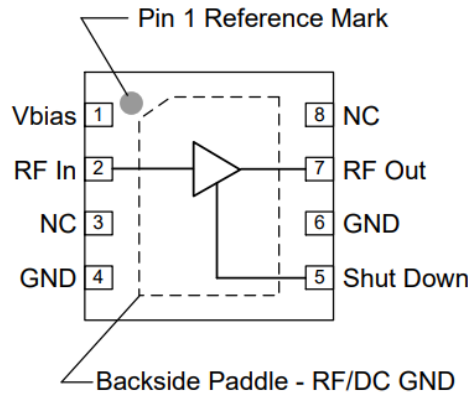


Top View


Pad No.	Label	Description
1	V _{bias}	Sets the LNA bias current for the device.
2	RF In	RF Input pin, internally matched to 50 ohms. A DC block is required.
5	Shut Down	A high voltage (>1.17V) turns off the device. If the pin is pulled to ground or driven with a voltage less than 0.63V, then the device will operate under LNA ON state.
7	RF Out	RF Output pin, internally matched to 50 ohms. A DC block is required.
3, 4, 6, 8	NC	Not connected internally. This pin may be left floating or connected to ground.
Backside Paddle	RF/DC GND	Ground connection. The back side of the package should be connected to the ground plan though as short of a connection as possible. PCB vias under the device are recommended.

Evaluation Board PCB Information

Qorvo PCB Material and Stack-up

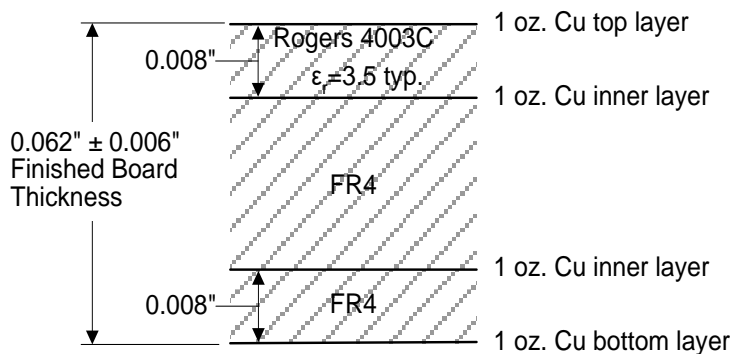


50 ohm line dimensions: width = 0.0182", spacing = 0.020"

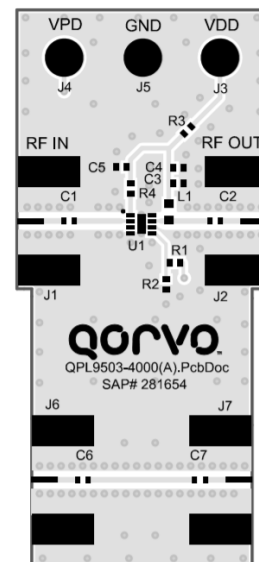


Package Marking and Dimensions

Marking: Part Number – 9504
Trace Code – XXXX up to 4 Characters assigned by sub-contractor

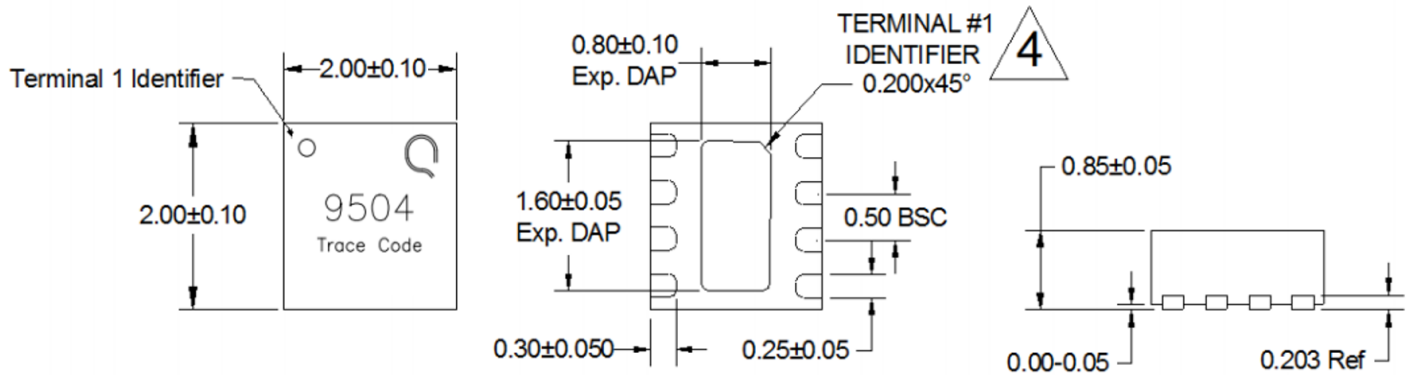

- Notes:
1. All dimensions are in millimeters. Angles are in degrees.
 2. The terminal #1 identifier and terminal numbering conform to SPE-000677.
 3. Contact plating: NiPdAu


Recommended PCB Layout Pattern

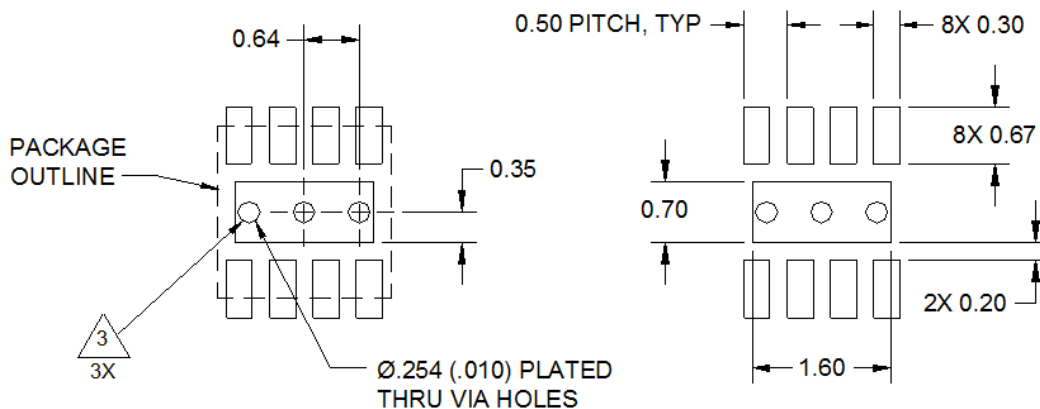

- Notes:
1. All dimensions are in millimeters. Angles are in degrees.
 2. Use 1 oz. copper minimum for top and bottom layer metal.
 3. Via holes are required under the backside paddle of this device for proper RF/DC grounding and thermal dissipation. We recommend a 0.35 mm ($\#80/.0135$ ") diameter bit for drilling via holes and a final plated thru diameter of 0.25 mm (0.01 ").
 4. Ensure good package backside paddle solder attach for reliable operation and best electrical performance.

Tape and Reel Information – Reel Dimensions

Standard T/R size = 2,500 pieces on a 7" reel.

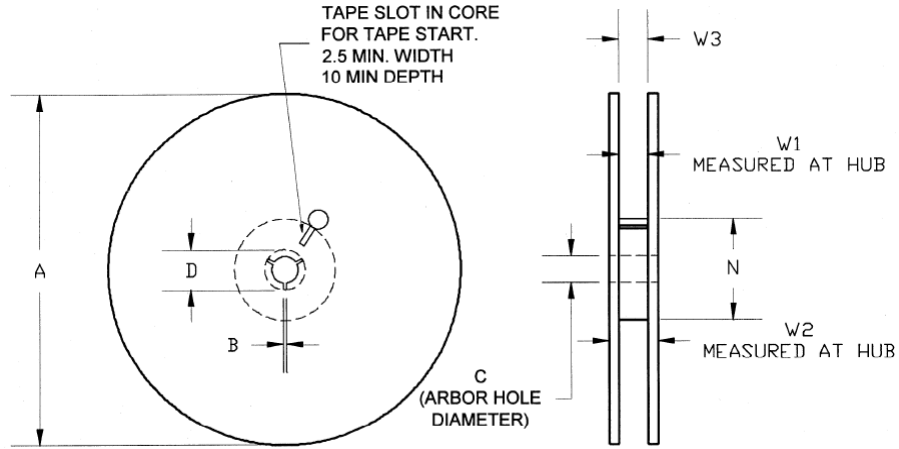

Feature	Measure	Symbol	Size (in)	Size (mm)
Flange	Diameter	A	6.969	177.00
	Thickness	W2	0.717	18.20
	Space Between Flange	W1	0.504	12.80
Hub	Outer Diameter	N	2.283	58.00
	Arbor Hole Diameter	C	0.512	13.00
	Key Slit Width	B	0.079	2.00
	Key Slit Diameter	D	0.787	20.00

Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	1B	ESDA / JEDEC JS-001-2017
ESD – Charged Device Model (CDM)	C3	JEDEC JESD22-C101F
MSL – Moisture Sensitivity Level	Level 1	IPC/JEDEC J-STD-020E



Caution!
ESD-Sensitive Device

Solderability

Compatible with both lead-free (260°C max. reflow temperature) and tin/lead (245°C max. reflow temperature) soldering processes. Solder profiles available upon request.

Contact plating: NiPdAu (*Thickness: Ni 0.508 ~ 1.524 μm; Pd 0.023 ~ 0.1016 μm; Au 0.00254 ~ 0.01016 μm*)

RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free



Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.qorvo.com

Tel: 1-844-890-8163

Email: customer.support@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2020 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.